

# Implementing Cross-Domain Kerberos Constrained Delegation Authentication

VMware Workspace ONE UEM 1902



vmware®

You can find the most up-to-date technical documentation on the VMware website at:

<https://docs.vmware.com/>

If you have comments about this documentation, submit your feedback to

[docfeedback@vmware.com](mailto:docfeedback@vmware.com)

**VMware, Inc.**  
3401 Hillview Ave.  
Palo Alto, CA 94304  
[www.vmware.com](http://www.vmware.com)

Copyright © 2018 VMware, Inc. All rights reserved. [Copyright and trademark information.](#)

# Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
	Prerequisites	5
<b>2</b>	<b>Configure KCD for Cross Domain Authentication</b>	<b>7</b>
	Assign Delegation Rights to the Service Account	8
	Update CRL Distribution Point (CDP) and Authority Information Access (AIA) Extensions	9
	Create Internet Information Services (IIS) Virtual Directory for the CRL Distribution Point	13
	Add a Service Account to the CAS/EAS Server	14
	Enable Windows Authentication on the CAS/EAS	14
	Configure Secure Email Gateway ( SEG ) on the Workspace ONE UEM console	15
	Install SEG	19
	Configure IIS for Certificate Authentication on SEG	21
	Configure EAS and Credential Profile	26
<b>3</b>	<b>Kerberos Authentication to Load Balance Servers</b>	<b>29</b>
<b>4</b>	<b>Troubleshooting</b>	<b>32</b>
	Errors and Solutions	38
<b>5</b>	<b>Appendix</b>	<b>43</b>


# Introduction

Use Kerberos as the authentication method over username or password.

Kerberos Constrained Delegation (KCD) authentication eliminates the use of username or password authentication for email. Instead of username or password, devices are issued certificates with the Exchange ActiveSync profile making the authentication transparent to use. Kerberos authentication uses tickets that are encrypted and decrypted by secret keys and do not contain user passwords. These tickets are requested and delivered in Kerberos messages and managed by the Kerberos Distribution Center (KDC).

Workspace ONE now supports KCD authentication with the SEG in a multi or cross-domain scenario. With this configuration, the client presents a certificate to the Workspace ONE Secure Email Gateway (SEG). This client certificate is authenticated by IIS on the SEG server. The SEG then leverages a domain service account to request a Kerberos ticket for the user from the KDC. The Kerberos ticket is forwarded to the Exchange server to authenticate the user.

The following diagram shows a typical SaaS deployment.

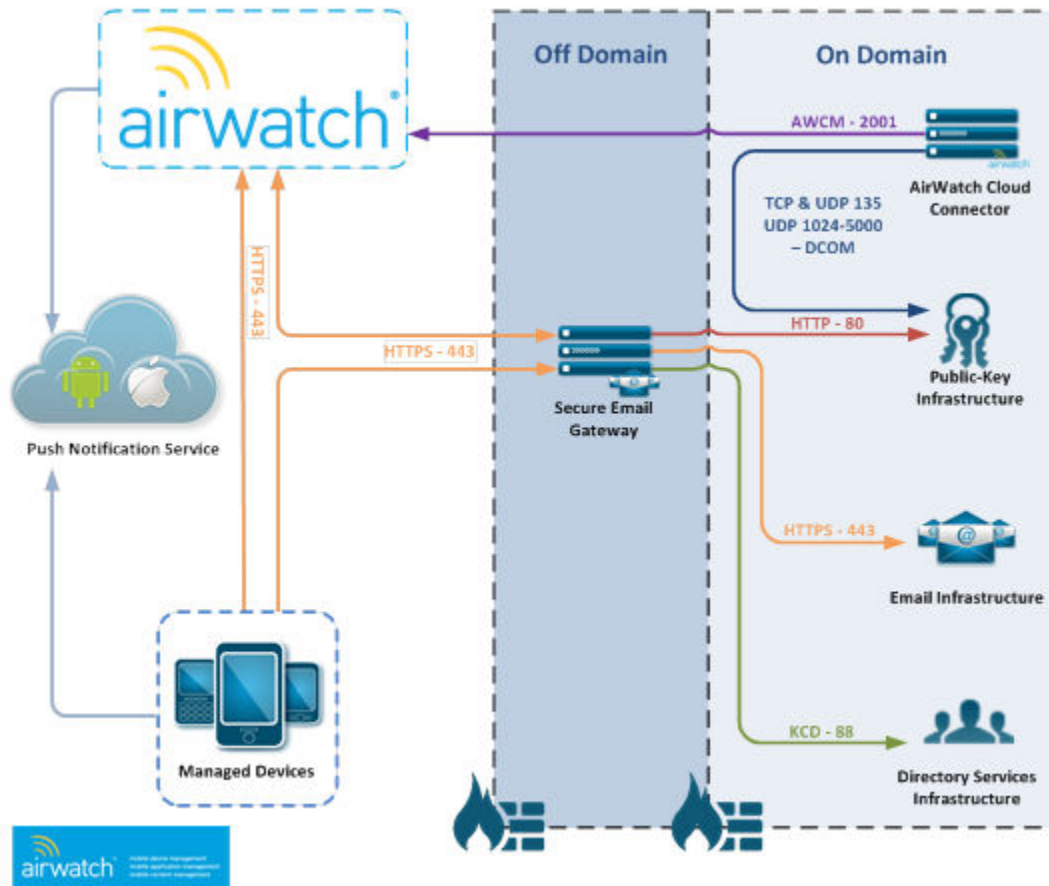

It is not required that the PKI infrastructure should be part of the domain.

## Prerequisites

Before configuring the Secure Email Gateway (SEG) to use cross-domain client certificate authentication, you must meet the following pre-requisites:

- A Windows Server (2008 R2+) that is not a member of the same domain as that of the Exchange server being authenticated to.
- A Certificate Authority (CA) integrated with Workspace ONE to issue certificates to your mobile devices. In this documentation, Microsoft is used as an example for a CA. However, Workspace ONE supports the certificates from other CAs apart from Microsoft. For more information on configuring Workspace ONE to issue certificates from your Certificate Authority to your Enterprise devices.
- A trust relationship between the Certificate Authority (CA) providing the certificates and the Directory Services server. This will entail:
  - Export the root CA certificate to a .cer file.

- At the command prompt, type the following command and press ENTER

```
Certutil -dspublish -f <filename> NTAAuthCA certutil -enterprise -addstore NTAAuth
CA_CertFilename.cer
```

- Android and iOS devices enrolled in Workspace ONE ready to receive EAS profiles. Supported devices may expand in the future so refer to your platform guides to determine compatibility for specific devices regarding support for EAS profiles with client certificates.
- A domain service account to be used as the Principal Identity with designated permission to impersonate users to the EAS service.
- Administrative access to the following in your enterprise environment:
  - Active Directory (AD) Users & Computers.
  - Exchange ActiveSync (EAS) or Client Access Servers (CAS).
  - Windows Server on which the SEG is to be installed.
  - Certificate Authority (CA).

---

**Note** If there are multiple CAS or EAS servers in an array, you need to create an Alternate Service Account (ASA) in Active Directory. Instructions can be found in the Appendix.

---

Communication paths should be as noted below:

Source	Port	Protocol	Destination
SEG	80	HTTP	CRL Distribution Point
SEG	88	LDAP\kerberos	Domain Controller
SEG	80/443	HTTP (S)	Exchange ActiveSync
SEG	443	HTTPS	AW API
DS/CN	443	HTTPS	SEG
Device	443	HTTPS	SEG

# Configure KCD for Cross Domain Authentication

## 2

Set up the Target Service Principal Name (SPN) for the Exchange Server.

If there are multiple CAS or EAS servers in an array, you must create an Alternate Service Account (ASA) in the Active Directory and then continue with Assigning Delegation Rights to the Service Account. If you have only one EAS or CAS server in your environment follow the instructions:

### Procedure

- 1 If the SEG is not referring to the Exchange server by its Fully Qualified Domain Name (FQDN) or its Machine Name, create a SPN for your Domain Controller to allow delegation by the service account.

If the SEG is referring to the Exchange server by its Fully Qualified Domain Name (FQDN) or its Machine Name, skip this step.

- 2 To set the SPN, open a command line window from a server on the domain being authenticated to and run the following command.

```
setspn -s HTTP/{EX_DNS_NAME} {EX_MACHINE_NAME}
```

Wherever **{EX\_DNS\_NAME}** is the name, the SEG uses it to refer to the Exchange server and **{EX\_MACHINE\_NAME}** is the actual machine name of the Exchange server, you must select this SPN when assigning delegation rights to the Service Account.

This chapter includes the following topics:


- [Assign Delegation Rights to the Service Account](#)
- [Update CRL Distribution Point \(CDP\) and Authority Information Access \(AIA\) Extensions](#)
- [Create Internet Information Services \(IIS\) Virtual Directory for the CRL Distribution Point](#)
- [Add a Service Account to the CAS/EAS Server](#)
- [Enable Windows Authentication on the CAS/EAS](#)
- [Configure Secure Email Gateway \(SEG\) on the Workspace ONE UEM console](#)
- [Install SEG](#)
- [Configure IIS for Certificate Authentication on SEG](#)
- [Configure EAS and Credential Profile](#)

## Assign Delegation Rights to the Service Account

Assign delegation rights to the service account.

### Procedure

- 1 Open **Active Directory Users and Computers** on the domain that you are authenticating to and navigate to **View**.
- 2 Enable the **Advanced Features**.
- 3 If you do not already have a service account created for the SEG to use for the Kerberos request, create one now. Refer to this account as **aw\_KCDsvc**.
- 4 Right-click the service account, select **Properties**. In the **Properties** menu, select the **Attribute Editor** tab.
- 5 In order to assign delegation rights to a user account, Microsoft requires that the account be assigned a Service Principal Name (SPN). The SPN for the service account is not used for anything other than this. Find the **servicePrincipalName** attribute in the list and edit it to be in the format **HTTP/aw\_KCDsvc**.

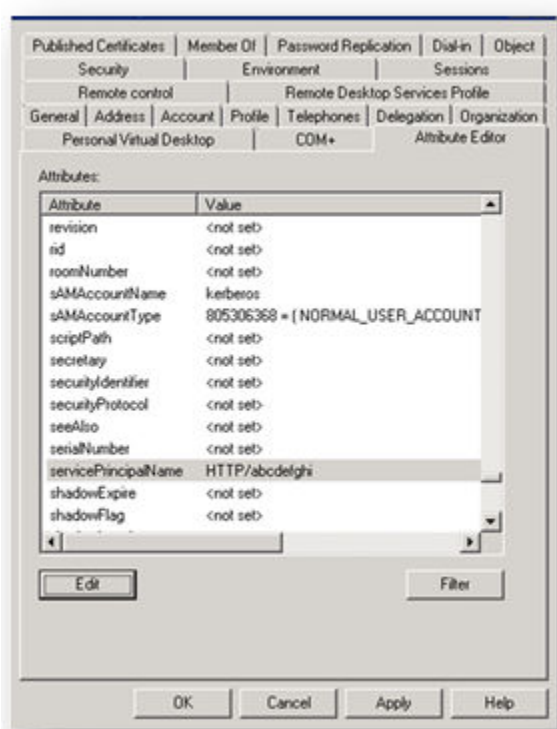


- 6 After setting up the SPN for the user account, close the **Properties** window and reopen it in order to access the **Delegation** tab.

Delegation cannot be set for a user account until an SPN is set.



- 7 On the **Delegation** tab, select the option **Trust this user for delegation to specified services only** and also **Use any authentication protocol**. Select **Add** and search and select the Exchange server (or the ASA account if you followed [Chapter 3 Kerberos Authentication to Load Balance Servers](#).) for which you want to provide the delegation rights.

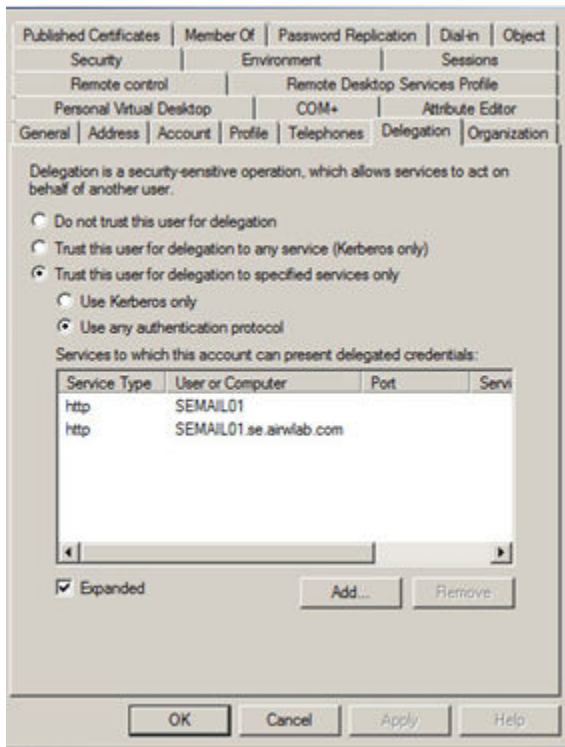

- 8 Scroll through the list to find the HTTP service type. If you set the SPN for the Exchange server in Step 2, select the SPN you created. Otherwise, select the HTTP service type for your server.

## Update CRL Distribution Point (CDP) and Authority Information Access (AIA) Extensions

By default, Microsoft Certificate Authorities are configured to publish and make available CRLs only through LDAP. Because the SEG server is not on the domain it is not able to check the default CRL of the Certificate Authority. Disabling the CRL checking greatly reduces the security of your PKI infrastructure. In order to address this, make the CRL available over HTTP from the SEG .

No certificates in the client certificate chain can have an LDAP distribution point for any certificates used to authenticate to an off domain server.

---

**Note** If you are using a Certificate Authority with a CDP accessible from the SEG , then continue with **Adding the Service Account to the Local IIS\_IUSRS Group of the CAS/EAS Server**.


---

The following configuration steps are assuming configuration from a Root CA.


### Procedure

- 1 Open the Certificate Authority Manager, right-click the CA name and select **Properties**.


## 2 Choose **Extensions** tab and edit the **CRL Distribution Point (CDP)**.

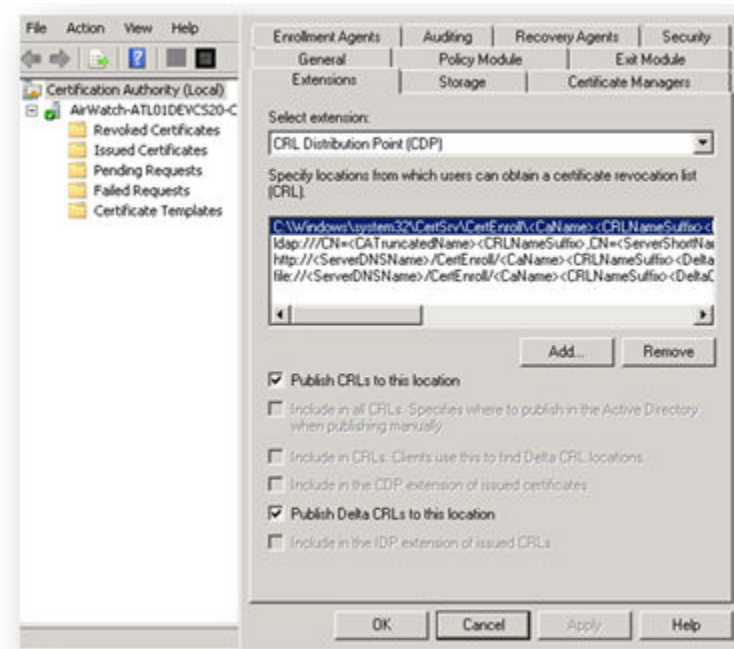

- 3 The first location should be a file path. This is where the CRL is stored on your server. This is the Physical Path of the Virtual Directory you create for the CDP.
- 4 The second path is through LDAP. Change this path to only have the Publish CRLs to this location and Publish Delta CRLs to this location selected. This allows any previously issued certificates to be checked for revocation correctly.

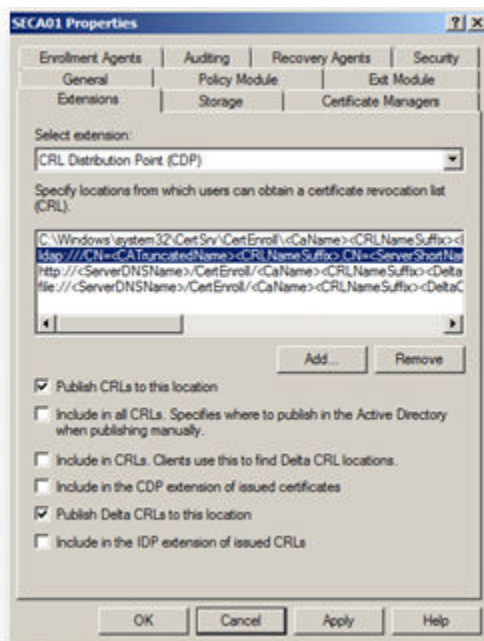


- 5 Select all available options for the HTTP distribution point. You won't be able to select the 'Publish to...' options. Note the **http://{path}**, use this in the next step to create the Virtual Directory for this path to make the CRL available from the SEG server.

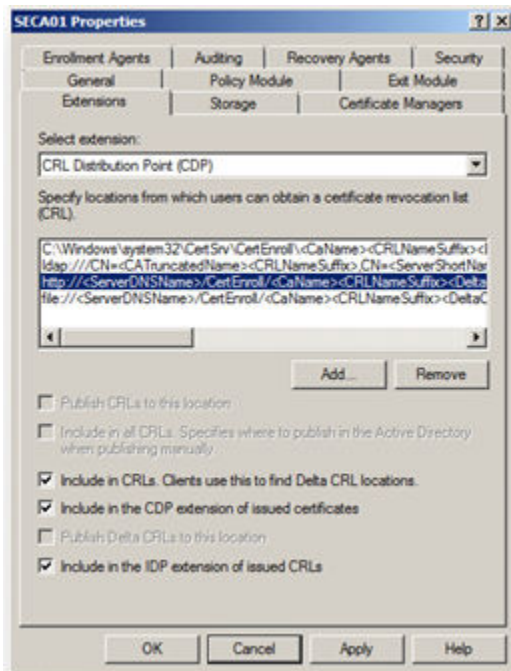


- 6 Check the file:// distribution point and ensure none of the options are selected. Do not close the menu. Next, change the AIA Extension.

- 7 Select the extension drop down menu and select **Authority Information Access (AIA)**. Set the options to match the following images. Remove the LDAP and add the HTTP distribution point. Note the file path for publication; this should match the CDP file path. Use this in the next step to create the Virtual Directory to make the CRL available through HTTP. The file:// location should have no options selected. Select **OK** to save your changes. Select **Yes** to restart Active Directory Certificate Services.

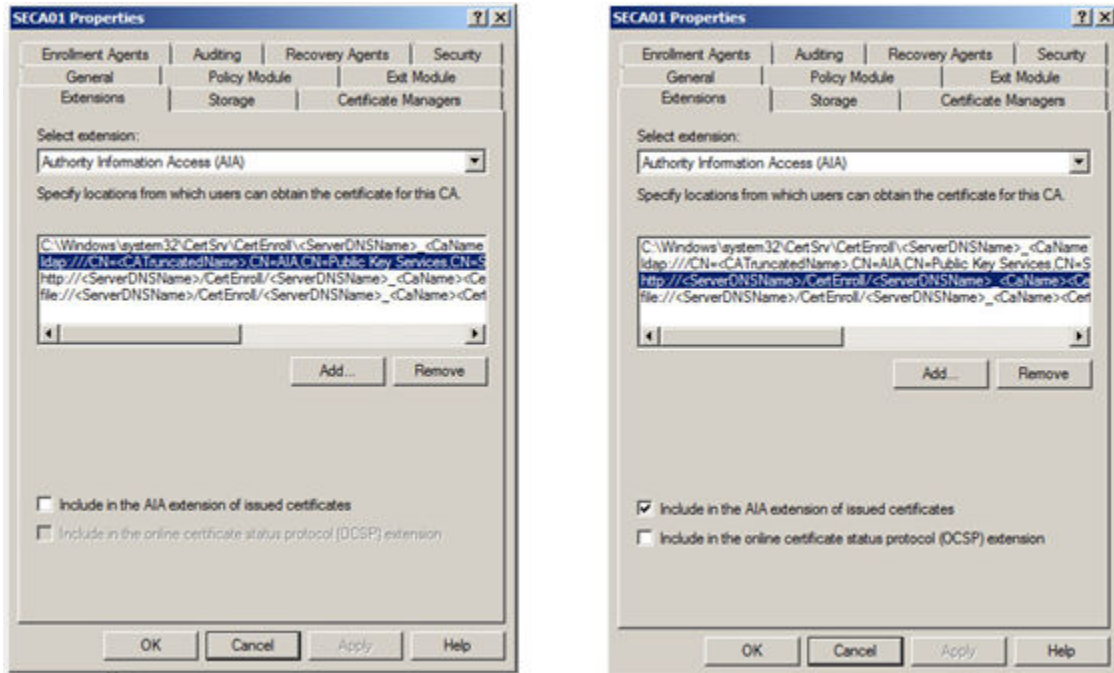

- 8 Now that the CRL Distribution Point (CDP) and Authority Information Access (AIA) Extensions have been updated, you need to republish the CRL to reflect the changes. Navigate back to **Certification Authority Manager** and expand the Certificate Authority. Right-click the **Revoked Certificates** directory and select **All Tasks > Publish** and then select **New CRL** and select **OK**.

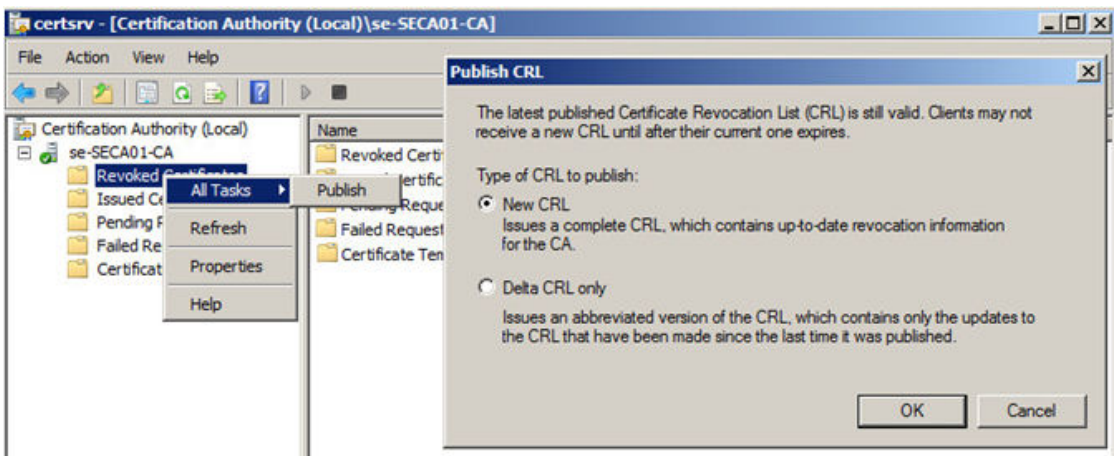


## Create Internet Information Services (IIS) Virtual Directory for the CRL Distribution Point

Configure IIS on the Certificate Authority to allow retrieval of the CRL over HTTP.

You can choose to set this up on a separate HTTP server but it would require configuring the CRL to be published to that server and configuring a new HTTP CRL Distribution Point for the certificates. If you would like to configure this we suggest you refer to Microsoft's documentation for best practices.

### Procedure


- 1 If IIS is installed on the Certificate Authority, open IIS Manager and navigate to the **Default Website**. Right-click and select **Add Virtual Directory**.

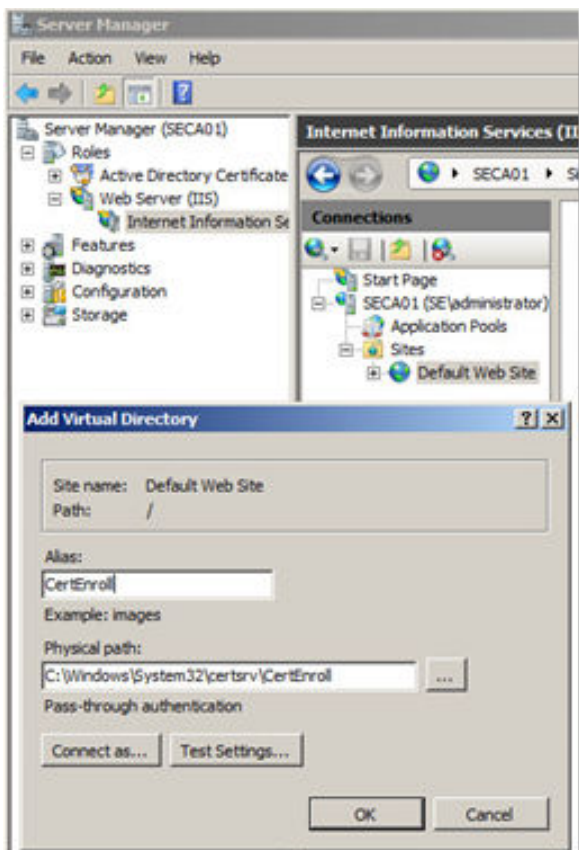

- 2 Set the alias to **CertEnroll** to match the distribution point configured in the CA CDP Extensions.
- 3 Set the Physical Path to the file path the CRL is being published to as set in the CA CDP Extensions. The default setting is **C:\Windows\System32\certsrv\CertEnroll**. Select **OK** to close the menu and save your settings.
- 4 Enable **Double Escaping** in IIS to allow the '+' in the Delta CRL's filename to be accessed through HTTP. Select the **Default Web Site** and open the **Configuration Editor**.



- Set **allowDoubleEscaping** to **True** and select **Apply** in the **Actions** panel. This is required to allow the Delta CRL to be accessed through the CDP.

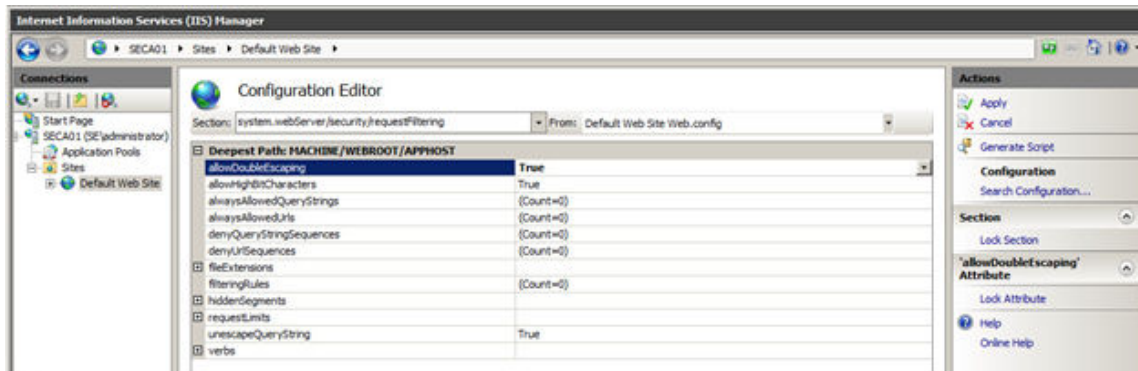


## Add a Service Account to the CAS/EAS Server

Add a service account to Local IIS\_IUSRS Group of the CAS/EAS Server.

### Procedure

- On the CAS/EAS server, open **Server Manager** and navigate to **Configuration > Local Users and Groups > Groups**.
- Right-click **IIS\_IUSRS** and select **Add to Group**. Select **Add...** to search for the **aw\_KCDsvc** service account and add the user to the local group then select **OK**.

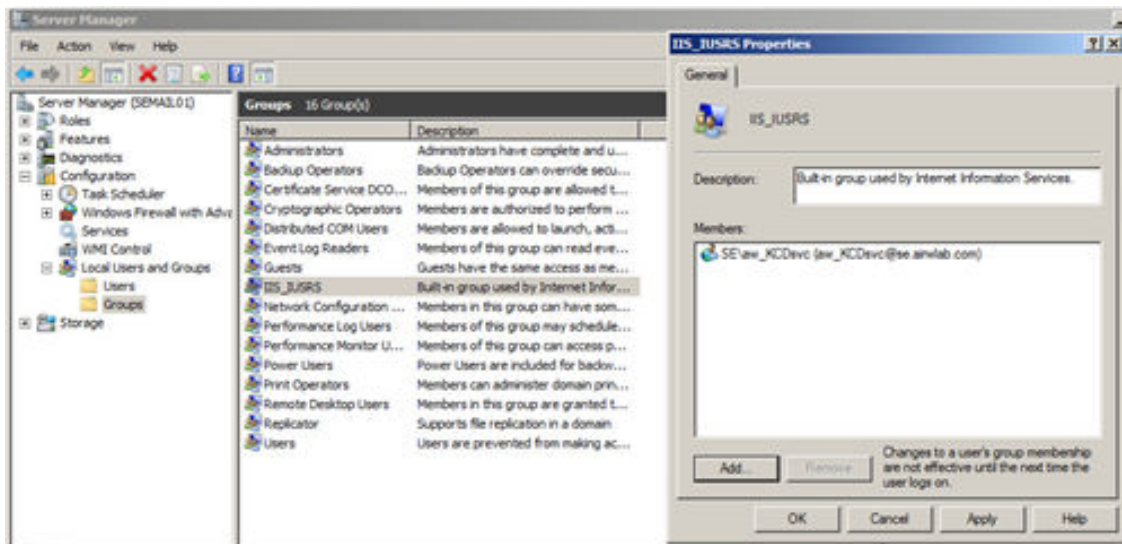


## Enable Windows Authentication on the CAS/EAS


Enable Windows authentication on the Exchange Server.

## Procedure

- 1 On the Exchange Server, open IIS Manager and navigate to the **Microsoft-Server-ActiveSync** Virtual Directory.
  - a Select **Authentication** then enable **Windows authentication**.
  - b Disable **Anonymous authentication**.

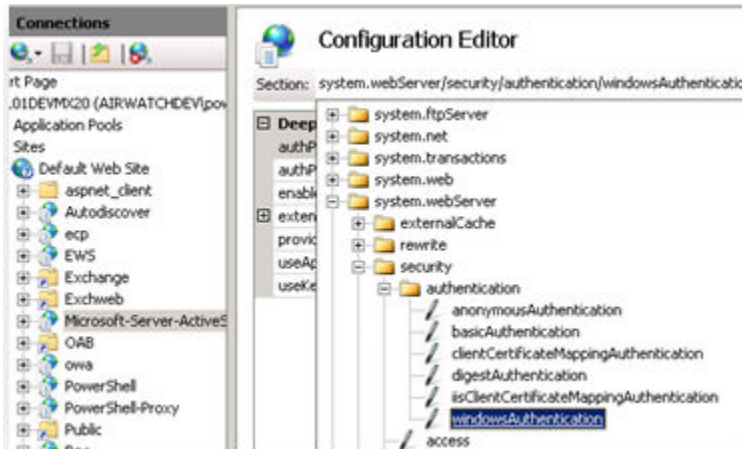

- 2 In the **Microsoft-Server-ActiveSync** Virtual Directory, access the **Configuration Editor** and navigate to **system.webServer > security > authentication > windowsAuthentication**.
  - a Set **useAppPoolCredentials** and **useKernelMode** to **True**.

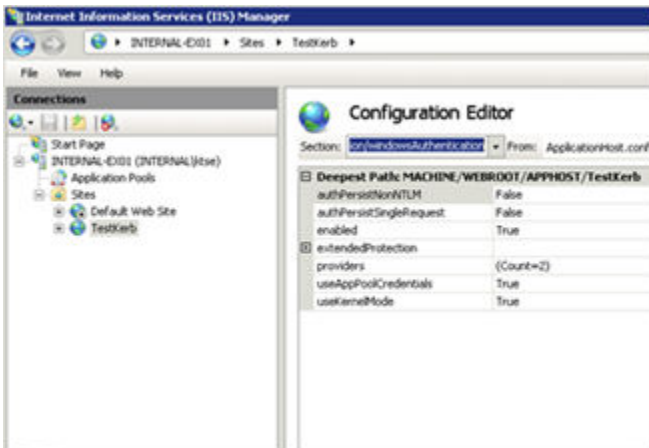

## Configure Secure Email Gateway ( SEG ) on the Workspace ONE UEM console

For detailed information regarding SEG configuration, please refer to the VMware AirWatch SEG Installation and Admin Guides . This guide aims to provide a simplified set of instructions to get you going for a basic configuration.

## Prerequisites

Check to ensure:

- There is a valid administrative account with permissions to the SOAP API at the MEM configured Organization Group.
- There is a SOAP API Certificate generated in the UEM Console.

## Procedure

- 1 From the UEM Console main menu, navigate to **Email > Settings**, and select **Configure**.

**Email Config Add**

① Platform    ② Deployment    ③ Profiles    ④ MEM Config Summary

Deployment Model \* ☒ Proxy ☐ Direct

Email Type \*

Exchange Version \*

- 2 On the **Email Config Add** page, choose your **Microsoft Exchange Version** and then select **Next**.



- 3 Enter a **Friendly Name** and your Exchange DNS name in the **Secure Email Gateway URL** field and select **Next**.

**Email Config Add**

① Platform    ② **Deployment**    ③ Profiles    ④ MEM Config Summary

**i** Email Management capabilities for this email server requires the installation of the AirWatch Secure Email Gateway (SEG) proxy server on-premise. Upon configuring the basic settings below, you will be able to download the installer for the SEG application from the Summary page of this wizard. For help with configuration, refer to the [AirWatch Mobile Email Management Guide](#).

Friendly Name \*

Secure Email Gateway URL \*  **i**

Ignore SSL errors between SEG and email server

Ignore SSL errors between SEG and AirWatch server

Use Basic Authentication   **i**

Gateway Username \*

Gateway Password \*

- 4 You may select to create profiles at the MEMProfile Deployment menu or select **Next** and create the profiles later. If you create them here you need to edit them to match the settings further in the setup guide.
- 5 Confirm settings and select **Save**. Next, select **Advanced**.

- 6 On the Mobile Email Management Advanced Configuration page, clear the **Use Recommended Settings** checkbox and select the **Enable Cross-domain KCD Authentication** checkbox. This option does not display during the SEG Setup unless it is enabled on the console.

**Mobile Email Management Advanced Configuration**

Friendly Name \*

Use Recommended Settings ☐

Enable Real-time Compliance Sync **Enabled** Disabled ⓘ

**KCD AUTHENTICATION**

Enable Cross-domain KCD Authentication **Enabled** Disabled ⓘ

Target SPN

Service Account Username

Service Account Password

Domain Controller Hostname

Domain Name

**REQUIRED TRANSACTIONS**

Folder Sync **Enabled** Disabled

Get item Estimate **Enabled** Disabled

Settings **Enabled** Disabled

Provision **Enabled** Disabled

**\* OPTIONAL TRANSACTIONS**

**DIAGNOSTIC**

Max Transactions Per Device \*  ⓘ

Default Diagnostic Period (in Hours) \*  ⓘ

**SIZING**

Sizing \* **Recommended** Custom

Rules Refresh Interval (min) \*  ⓘ

Enable Delta Sync **Enabled** Disabled

Delta Rules Refresh Interval \*  ⓘ

Transfer Rate To Gateway (transactions) \*  ⓘ

Transfer Rate To Console (transactions) \*  ⓘ

**S/MIME OPTIONS**

Ignore Attachment & Hyperlink transformations for S/MIME signed emails **Yes** No ⓘ

**Save** **Cancel**

## 7 Enter the required fields:

Settings	Description
Target SPN	HTTP/{exchangeName}. This is the ASA or CAS/EAS Server name without the domain. For example if the Exchange server DNS name is semail01.se.airwlab.com, the Target SPN is HTTP/semail01
Service Account Username	Username with delegation rights, for example, aw_KCDsvc.
Service Account Password	Password for aw_KCDsvc account.
Domain Controller Hostname	The DC server name without the domain
Domain Name	Domain name in uppercase. For example, if the DC FQDN is sedc01.se.airwlab.com enter SE.AIRWLAB.COM

- 8 Select **Save** and then select **AirWatch Secure Email Gateway Installer** to download the installation package from the SEGserver. The link is in the SEG Proxy Settings menu.

SEG supports multiple domains. No additional configuration is required on the UEM Console. It depends on the SEG's connectivity to each domain controller.

## Install SEG


Install the SEG in a basic configuration.

For more details refer to the MEM and SEG Admin Guides.


### Procedure

- 1 From the SEG server, download the SEG installer from your Organization Group in the UEM Console.
- 2 Launch the installation wizard and when the wizard appears, select **Next**. After reading the EULA, if you accept the terms select the appropriate options and select **Next**. If you have questions about the EULA, contact Workspace ONE Support.
- 3 Select the installation path and select **Next** to continue. Then select **Next** to install to the Default Website.
- 4 If IIS URL Rewrite Module 2 is not installed, you are prompted to download it from Microsoft and install it. Continue with the installation, this IIS component is required for the SEG to function appropriately. When the installation completes, select **Finish** to continue with the SEG installation.
- 5 If Microsoft Application Routing Version 2 is not installed, you are prompted to install it. Continue with the installation. These IIS components are required for the SEG to function appropriately. When the installation completes, select **OK** to continue with the SEG installation.
- 6 Select **Install** and wait for the installation to complete and then select **Finish**. It is a good idea to check the Windows Installer Log for any errors. The Workspace ONE SEG Setup Web console should open in a browser. If it does not, look on the desktop for a shortcut to the console.

- 7 Enter your environments API server address and Administrative credentials to the Workspace ONE SOAP API. This requires a valid admin account at the SEG's Organization Group with a SOAP API certificate generated. Then select **Next**. Workspace ONE does not recommend choosing to **Ignore SSL Errors** but you may select this option if needed.

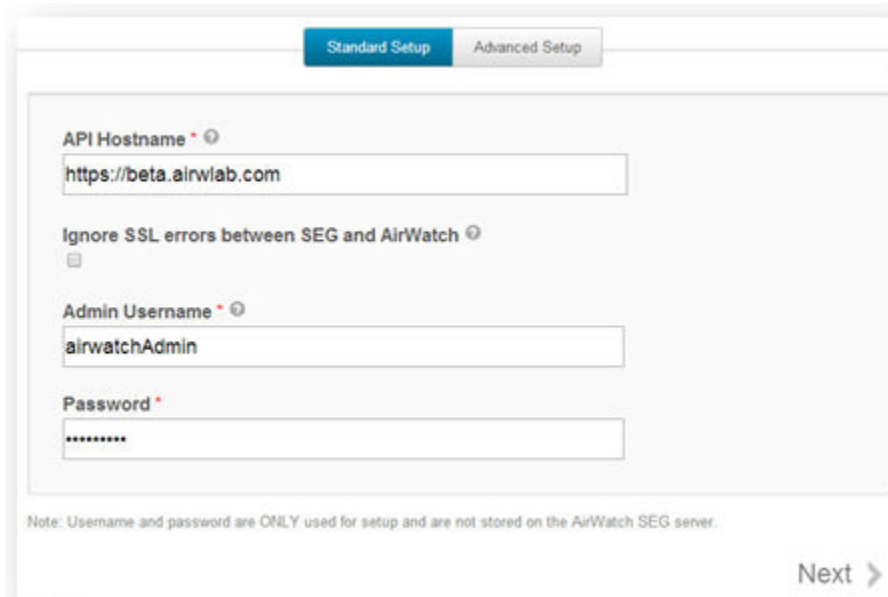

- 8 Select the **Organization Group** where your SEG is configured and make sure the MEM Configuration matches the Friendly Name chosen in the previous step.

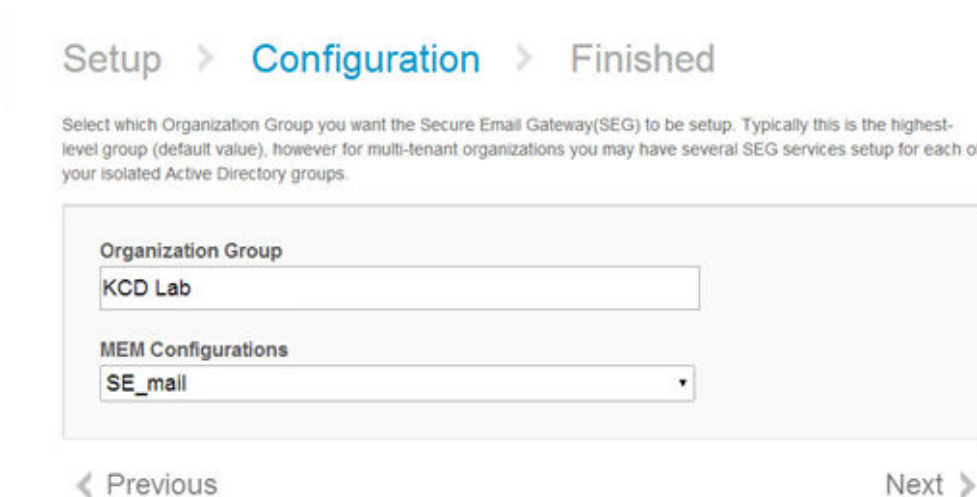

- 9 Enter the **Email Server Hostname** as the SEG should refer to the CAS/EAS Server. Keep in mind that if using SSL, the SSL certificate presented by the server should contain the hostname used to access it in the SAN or Common Name of the certificate. If it does not, there can be a trust issue between the SEG and Exchange which can cause the chain break.

- 10 Select **Verify** to test authentication from the SEG to the CAS/EAS Server using Basic authentication. This validates that the email server is reachable from the SEG and that there are no connection or trust errors. Close this window when you receive a successful verification. If verification fails, you should check the SEG Setup log located in the \\AirWatch\\Logs\\SEGSetup directory for more information.
- 11 Validate that the settings configured in the UEM Console match what you see here and then click **Next**.
  - a In order for the server configuration changes to be committed, an IIS reset is required. Open a command prompt and issue the command `iisreset`. You may also restart both the **IIS Admin Service** and the **World Wide Web Publishing Service** with the **Server Manager > Services UI**.
  - b The user must manually change the Secure Email Gateway to use 32-bit application mode.
  - c Check identity of the secureEmailgateway application pool. It should be set to NetworkService.
  - d Check that the App Pool is set to Enable 32-Bit application mode.
- 12 The SEG Service Installation and Configuration is now complete. You may change the log level of the SEG here. Only turn the log level up during troubleshooting as it places an unnecessary load on the server during normal operation.
- 13 The SEG server needs to trust the domain certificate authority. To establish this trust, you need to add the Root CA Certificate into the Local Computer Trusted Root Certification Authorities store on the SEG server. To do this, launch **MMC** on the SEG server and add the **Certificate Snap-In** for the **Local Computer** and then import the domain's Root CA certificate into the Trusted Root Certification Authorities store. If there are intermediate CAs in the chain, their certificates should be added to the Intermediate Certificate Authorities store.
- 14 Note that the CRLs of every certificate in the chain must be reachable from the SEG server in order for revocation checking to pass and clients to authenticate. Root CA Certificate's do not contain a CRL Distribution Point (CDP) Extension by default but intermediate and client certificates should. Steps 3-4 cover how to configure your CA to publish its CRL to an HTTP distribution point. It is a requirement that this Distribution Point is accessible from your SEG server.


## Configure IIS for Certificate Authentication on SEG

In order for the SEG to authenticate the users<sup>®</sup> device that is assigned to a particular certificate, **Internet Information Services (IIS)** on the SEG server must be configured to accept that certificate.


### Procedure

- 1 On the SEG Server, launch **Internet Information Services (IIS)** by selecting **Start > Run**.
- 2 Type `inetmgr` and select **OK**. The IIS Manager window appears.
- 3 In the left-hand **Connections** pane select the SEG server.

- 4 In the main pane, under the **IIS** section, double-click the **Authentication** icon.

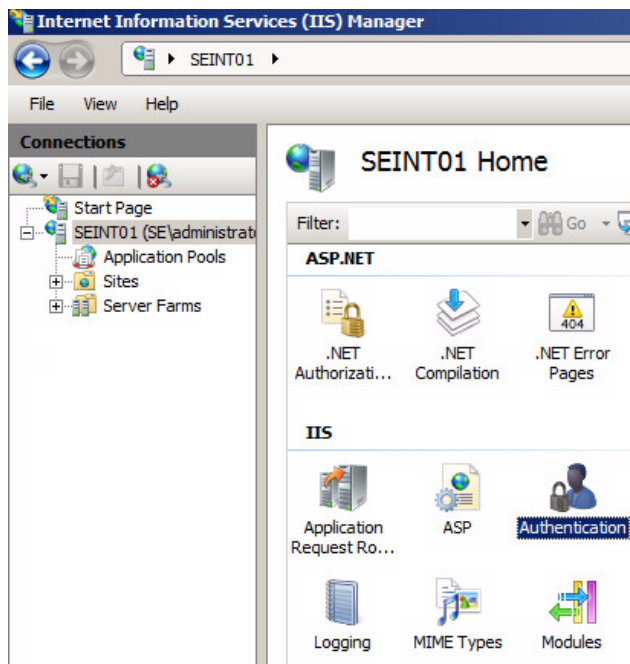

- 5 Select **Active Directory Client Certificate Authentication**. If this option is not available, see Install the Role in IIS in **VMware AirWatch Certificate Authentication for EAS with SEG** available on [docs.vmware.com](https://docs.vmware.com).
- 6 In the right-hand pane, select **Enable**.

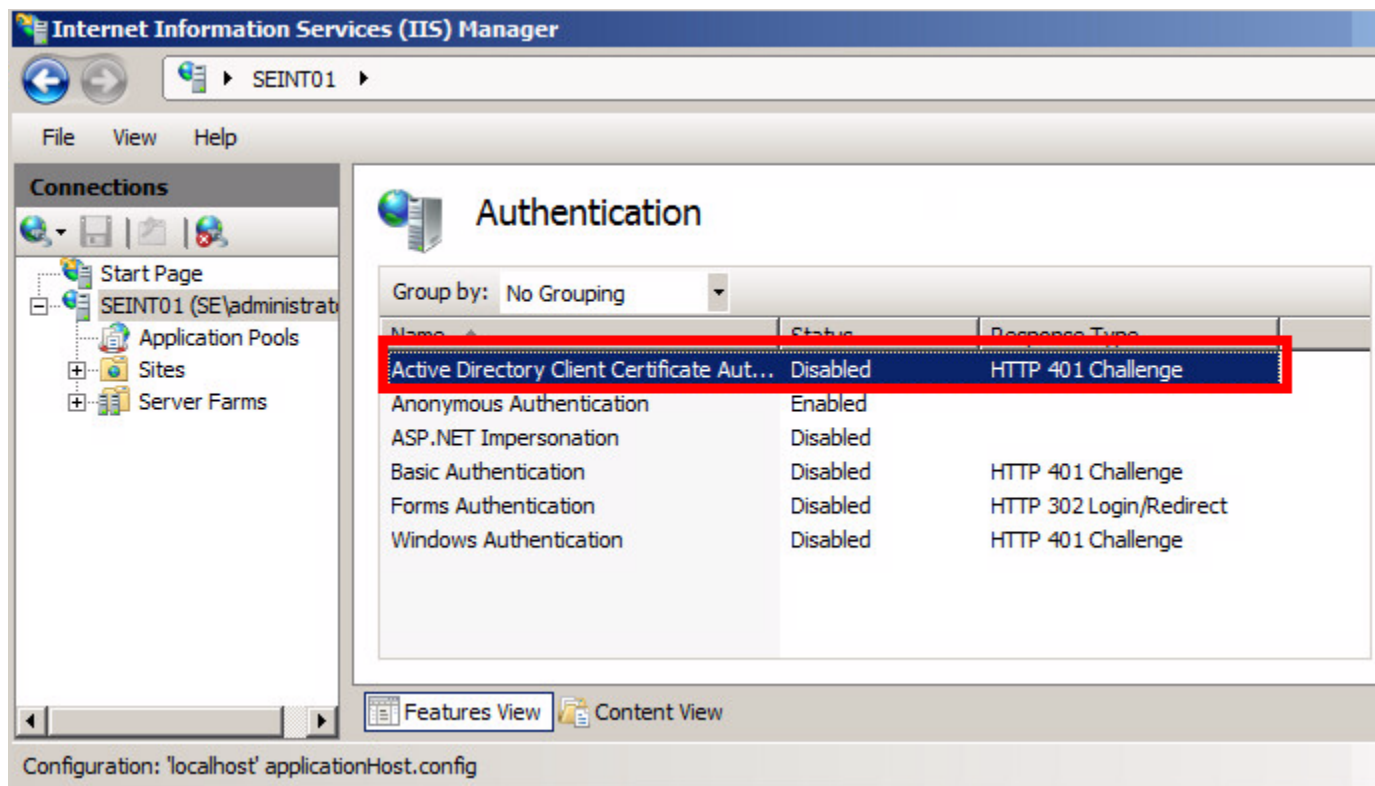


## Set Up Email Configuration

Use the Configuration Editor to set up email authentication.

### Procedure


- 1 Click + to expand the **Sites** folder.
- 2 Click + to expand the **Default Web Site** and display the email sever you want to configure.
  - a If you are using MS Server 2008 R2 or later, the **Configuration Editor** icon appears as shown in the screen below. This icon does not appear in older versions of MS Server. Select **Microsoft-Server-ActiveSync** and double-click the **Configuration Editor** icon. If applicable, proceed directly to step 3.
  - b If you are using Exchange ActiveSync (EAS) servers older than 2008 R2, you will need to be familiar with the use of **appcmd.exe** and run it from the command prompt.
  - c Open a command prompt by selecting **Start > Run**. In the dialog box type `cmd` and select **OK**. In the command prompt, type the following command:
 

```
appcmd.exe set config "Microsoft-Server-ActiveSync" -
section:system.webServer/security/authentication/clientCertificateMappingAuth
entication /enabled:"True" /commit:apphost
```
  - e If you performed this step, then skip the remaining steps and advance to Setting up Secure Socket Layer (SSL).
- 3 Navigate to **system.webserver/security/authentication** under **Section**.
- 4 Select **clientCertificateMappingAuthentication**.

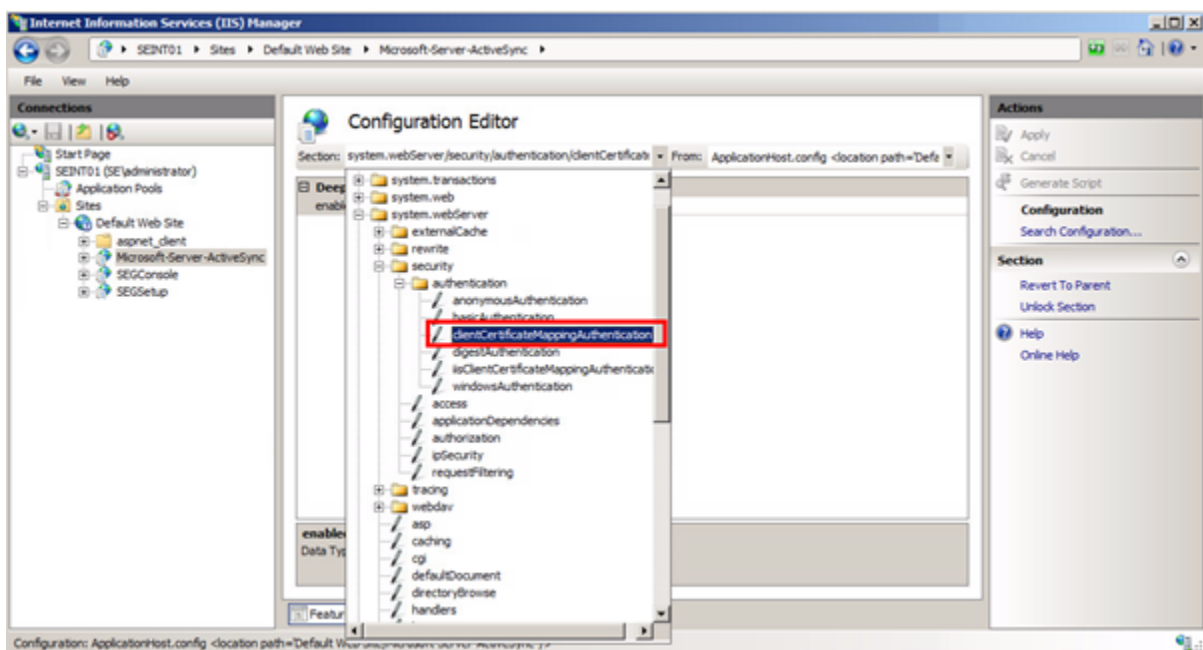




- 5 Select **True** from the **Enabled** drop-down menu.

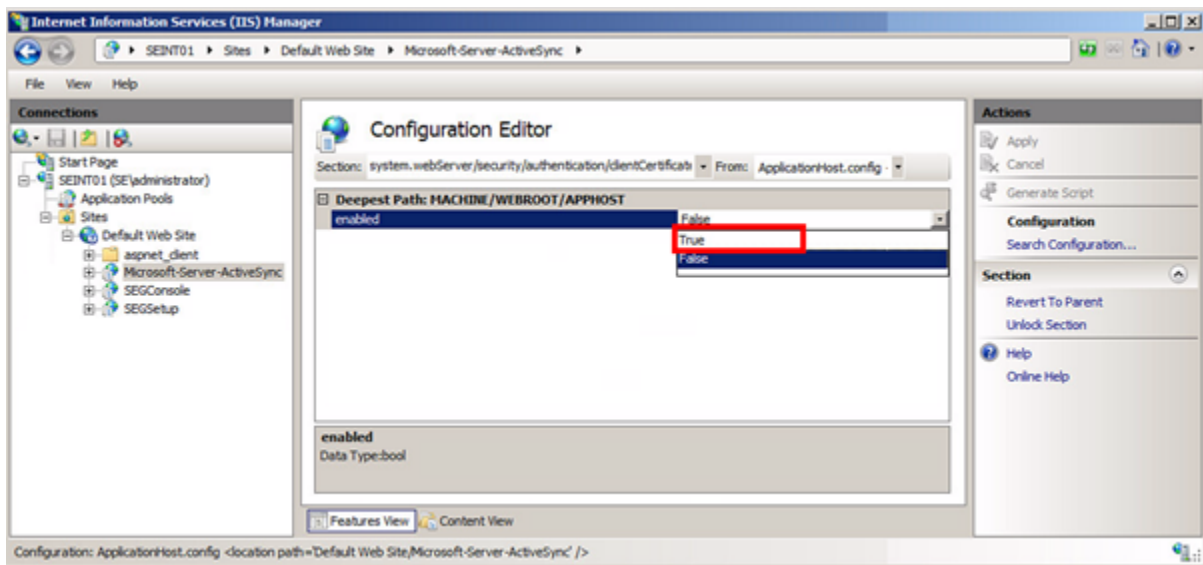

- 6 Click **Apply**.

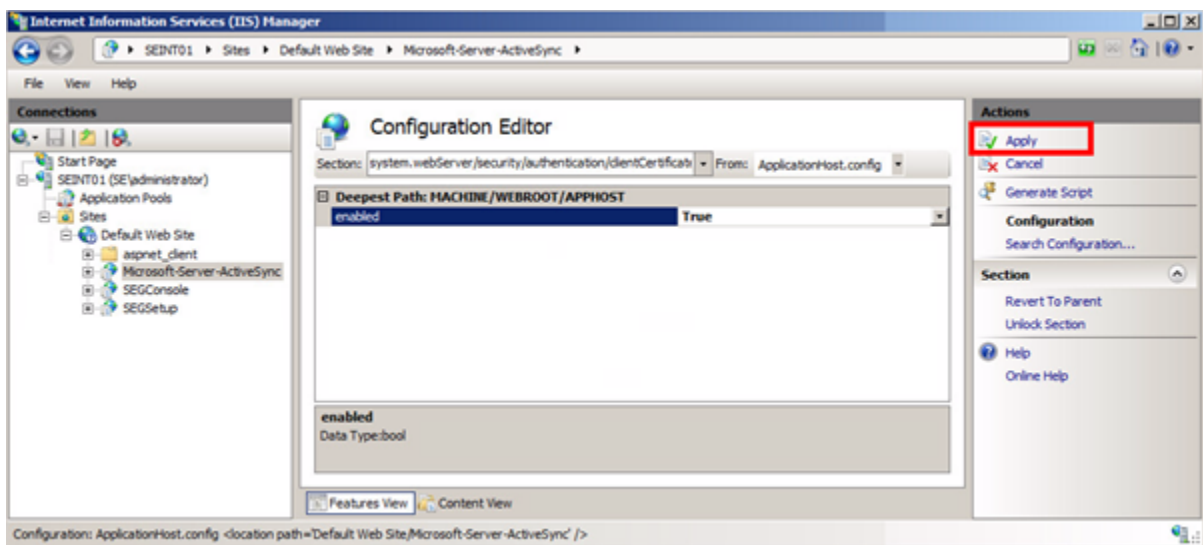


## Set Up Secure Socket Layer (SSL)

If only certificate authentication is being used then you must configure Secure Socket Layer (SSL). Otherwise, if authentication other than certificates is used then you do not need to configure SSL.




## Procedure

- 1 Select **Microsoft-Server-ActiveSync**, and then double-click **SSL Settings**.

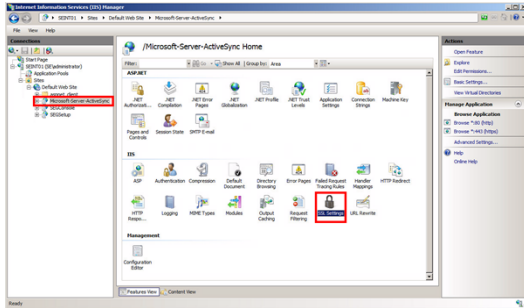

- 2 If only certificate authentication is allowed, select **Require SSL** and then **Required**. If other types of authentication are allowed, select **Accept**.
- 3 Click **Apply**.

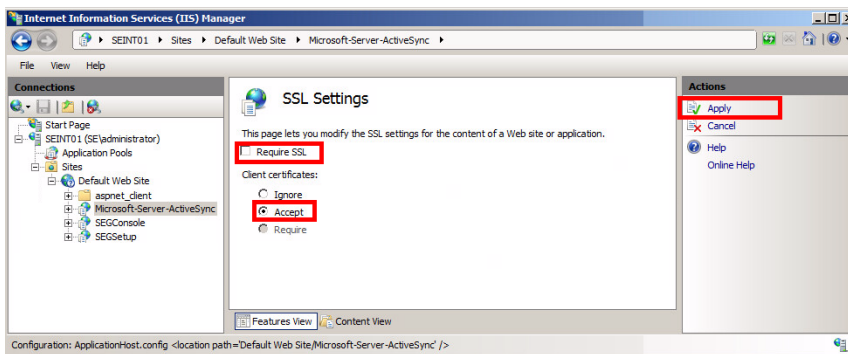

## Adjust *uploadReadAheadSize* Memory Size

Since certificate based authentication uses a larger amount of data during the authentication process, some adjustments must be made in IIS configuration to account for the increased amount of data. This is accomplished by increasing the value of the *uploadReadAheadSize*.

## Procedure

- 1 Open a command prompt by selecting **Start > Run**.
- 2 Type `cmd` and select **OK**. A text editor window appears.

- 3 Increase the value of the *uploadReadAheadSize* from the default of 48KB to 10MB by entering the following commands:
  - a `C:\Windows\System32\inetsrv\appcmd.exe set config -  
section:system.webServer/serverRuntime /uploadReadAheadSize:"10485760" /commit:apphost`
  - b `C:\Windows\System32\inetsrv\appcmd.exe set config "Default Web Site" -  
section:system.webServer/serverRuntime /uploadReadAheadSize:"10485760" /commit:apphost`

Default Web Site is used in the sample code above. If the name of the site has been changed in IIS then the new name needs to replace Default Web Site in the second command.
- 4 Type the following command to reset the IIS: `iisreset`


## Configure EAS and Credential Profile

Configure EAS and Credential Profiles from the Workspace ONE UEM console.

### Procedure

- 1 Navigate to **Devices > Profiles > List View** in the UEM console. Create a new profile for Android or iOS. Assign the profile a **Friendly Name**. Be aware of the **Assignment Type** and who might receive this profile when you publish the profile. Make any additional changes to the **General Settings** that you would like.

- 2 Select the **Credentials** payload and then select **Configure**. Select **Defined Certificate Authority** and then select your CA and template that were configured previously. Refer to Resource Portal if this has not already been completed.

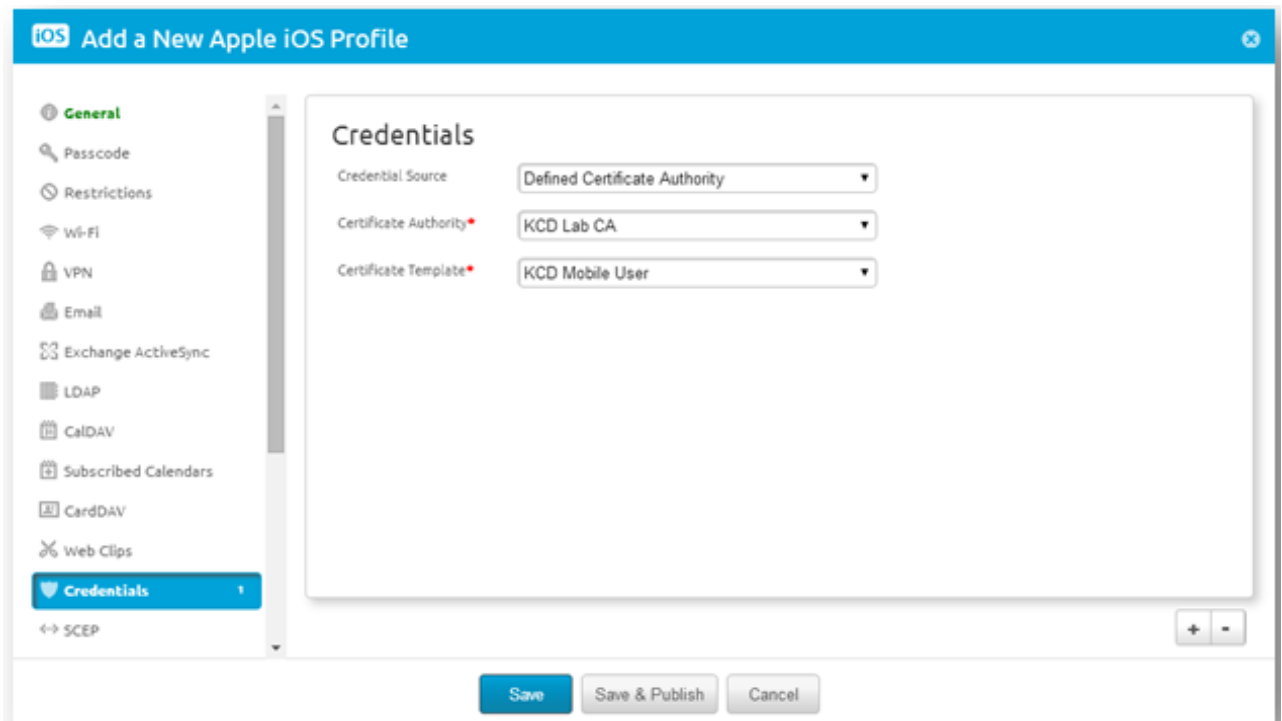

- 3 Select the **Exchange ActiveSync** payload. Enter the **Exchange ActiveSync Host**; this is the public DNS name of the SEG server. Ensure **Use SSL** is selected.
- 4 Set the **Payload Certificate** to **Certificate #1**.

- 5 Remove any entries in the **Domain** and **Username** fields. Set **Email Address** to the desired lookup value. You may now **Save** or **Publish** if you are ready to push the profile to devices.

**iOS Add a New Apple iOS Profile**

**General**

Passcode

Restrictions

Wi-Fi

VPN

Email

**Exchange ActiveSync**

LDAP

CalDAV

Subscribed Calendars

CardDAV

Web Clips

**Credentials**

SCEP

Mail Client: Native Mail Client

Account Name: Exchange ActiveSync

Exchange ActiveSync Host: awseg.airlab.com

Use SSL: ☒

Use S/MIME: ☐

**LOGIN INFORMATION**

Domain:  Insert Lookup +

Username:  Insert Lookup +

Email Address: [EmailAddress] Insert Lookup +

Password:  Insert Lookup + Show Characters

Payload Certificate: Certificate #1

Save Save & Publish Cancel

# Kerberos Authentication to Load Balance Servers

# 3

## Create Alternate Service Account (ASA)

If the environment has multiple Client Access Server (CAS) or Exchange ActiveSync (EAS) servers, then the service registration procedure varies. An alternate service account needs to be created to represent the CAS Array.

### Leveraging an ASA Credential Type

You can create a computer account or a user account for the alternate service account. Because a computer account does not allow interactive logon, it may have simpler security policies than a user account and therefore is the preferred solution for the ASA credential. If you create a computer account, the password doesn't actually expire, but we still recommend updating the password periodically. Local group policy can specify a maximum account age for computer accounts and there might be scripts scheduled to periodically delete computer accounts that do not meet current policies. Periodically updating the password for computer accounts ensures that your computer accounts are not deleted for not meeting local policy. Your local security policy determines when the password needs to be changed.

### Credential Name

There are no particular requirements for the name of the ASA credential. You can use any name that conforms to your naming scheme.


### Groups and Roles

The ASA credential does not need special security privileges. If you are deploying a computer account for the ASA credential this means that the account only needs to be a member of the Domain Computers security group. If you are deploying a user account for the ASA credential, this means that the account only needs to be a member of the Domain Users security group.

### Password

The password you provide when you create the account is actually never used. Instead, the script resets the password. So when you create the account, you can use any password that conforms to your organization's password requirements. All computers within the Client Access server array must share the same service account. In addition, any Client Access servers that may be called on in a datacenter activation scenario must also share the same service account.

- 1 Create the alternate service account (ASA) for the CAS ARRAY in the domain by opening the Active Directory User and Computers and creating new computer account. Type a name for the ASA, using CASARRAY- ASA as example. Verify that the account has replicated to all Domain Controllers before proceeding.

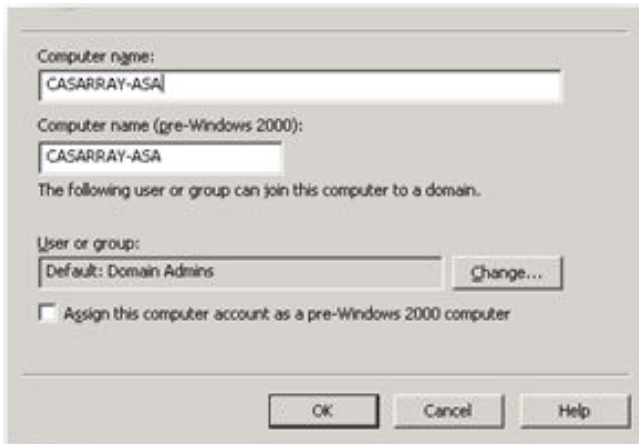

- 2 Verify the CAS array's FQDN, since this name is used for the SPN that is attached to the ASA. In order to check the CAS Array's FQDN, run the next command in PowerShell.

```
Get-ClientAccessArray
```

- 3 Create the SPN using the setspn command.

```
setspn -s http/{CAS-FQDN} {ASA_ACCOUNT}$
```

- 4 Verify that all relevant SPNs have been assigned by running the following command from PowerShell.

```
setspn -L {ASA_ACCOUNT}
```

- 5 To set ASA to the CAS servers, run the Alternate Service Account credential script in the Exchange Management Shell **RollAlternateServiceAccountPassword.ps1**

**.\RollAlternateServiceAccountPassword.ps1 -ToArrayMembers {CAS-FQDN} -  
GenerateNewPasswordFor "{DOMIAN}\{ASA\_ACCOUNT}" -Verbose**

- 6 You can see a 'Success' message when the script has completed running. To verify that the ASA credentials have been deployed properly, use the following command:

```
Get-ClientAccessServer -IncludeAlternateServiceAccountCredentialStatus | fl name,*alter*
```


- 7 Return to [Assign Delegation Rights to the Service Account](#) and in step 6, enable the SEG to delegate HTTP EAS traffic to the newly created ASA instead of the Exchange server FQDN.

# Troubleshooting

## CAPI2 Event Logging

CAPI2 (Cryptographic API) Event Logging captures information including certificate authentication logs from IIS. Enabling the CAPI2 log in Event Viewer is a simple way to quickly determine the cause of any invalid certificate errors. The CAPI2 log should be enabled on the server which is receiving the client certificates.

To enable the CAPI2 Event Log, open the **Event Viewer** and navigate to **Applications & Services Logs > Microsoft > Windows > CAPI2 > Operational** and then select **Enable Log** in the actions panel.

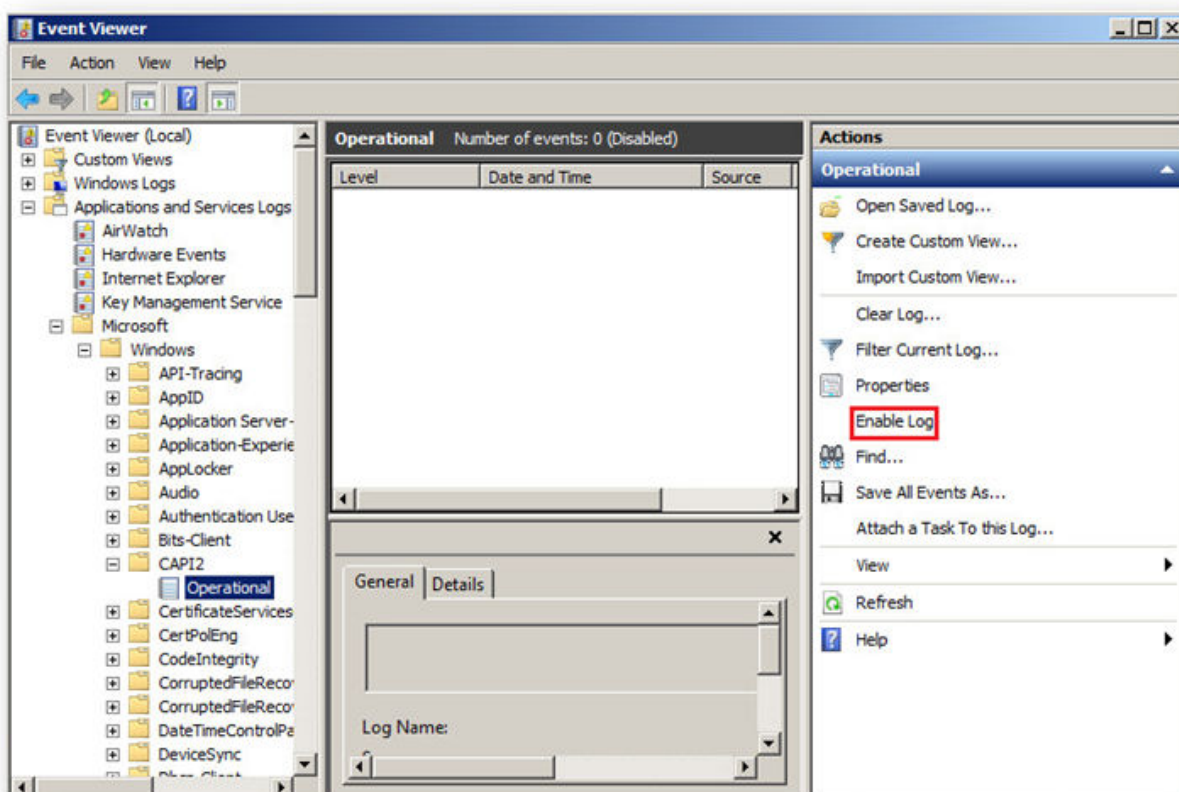



Once the logs are enabled you can resubmit the request from a client device with the certificate and you can see that new events become available. In order to see the events, you need to refresh the log by selecting Refresh in the Actions panel.

**Note** It is important to note that there are many system events that can generate errors in this log so you should be sure to isolate the events that are generated by the client certificate being presented. You should look at the Details tab of the events to find more information. It is common to see the certificate information in the events as well as more details as to why the certificate is not being accepted. You can also use **Find...** to search for the client certificates Common Name.


If you do not see events related to your certificate in the logs, it is likely that the certificate is not being presented to the server or that the server is not configured to accept client certificates.

## Failed Request Tracing


Failed Request Tracing can be helpful in gathering details about the cause of an authentication failure.

To enable failed request tracing:


- 1 Open IIS, right-click the **Default Website** and select **Manage Website > Advanced Settings**.

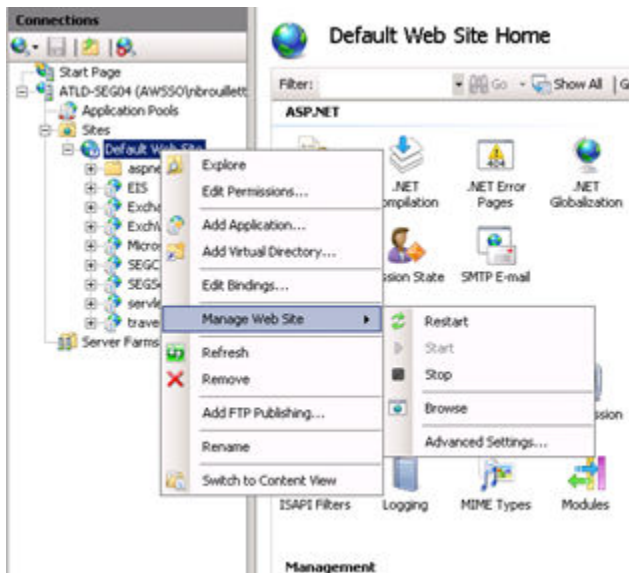


- 2 Under the **Behavior** header, expand **Failed Request Tracing**. Note the directory where log files are saved, and set the **Enabled** field to True. Click **OK**.

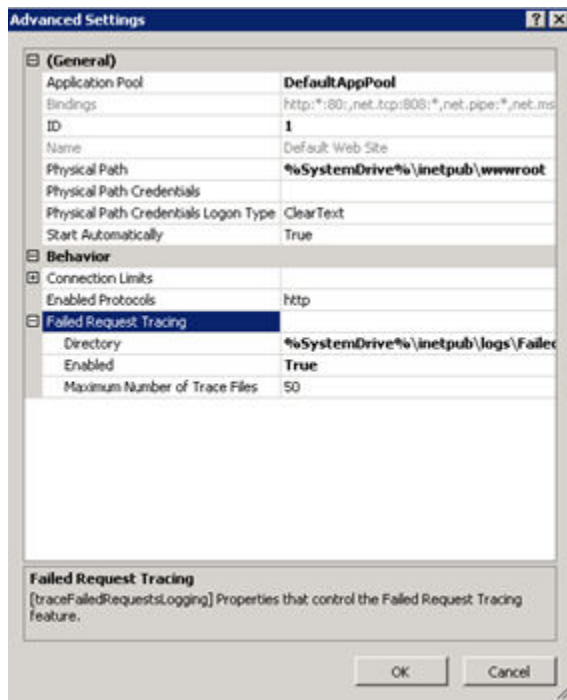

- 3 Double-click **Failed Request Tracing Rules** from the IIS home menu.

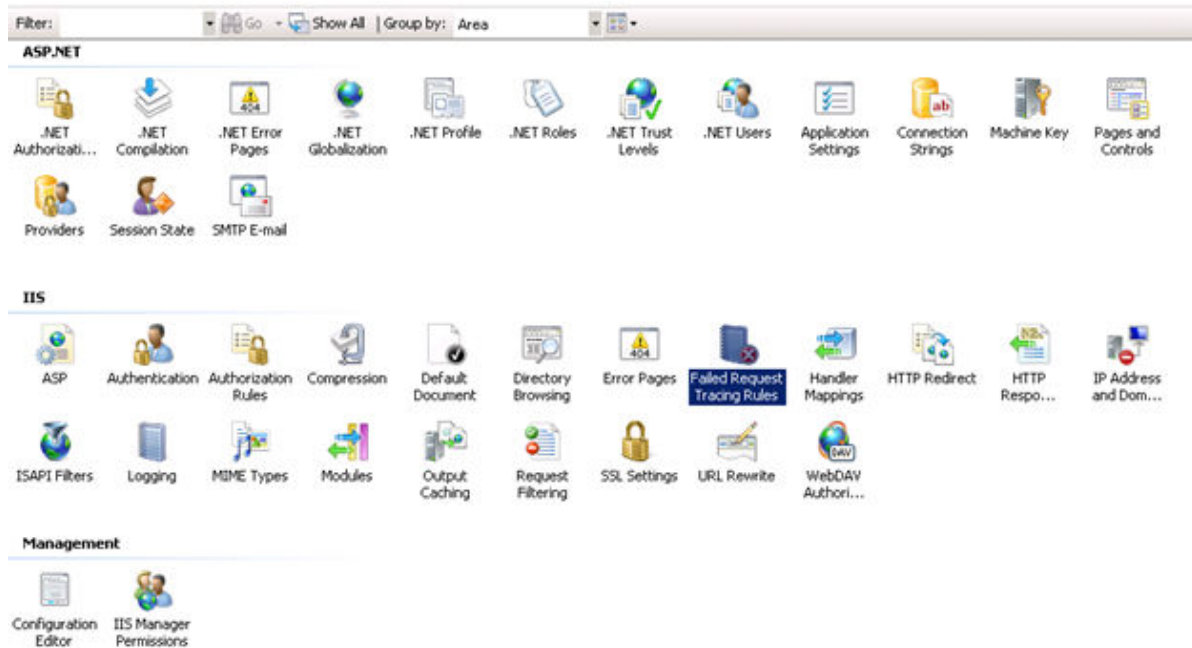


- 4 Edit the rule so that the appropriate status codes are tracked. A range of 300-600 will suffice for the initial troubleshooting.

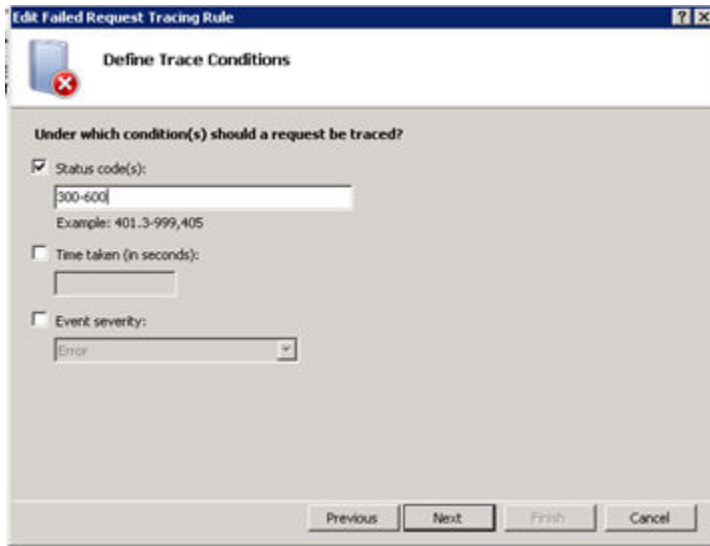


The screenshot shows the 'Edit Failed Request Tracing Rule' dialog box with the 'Define Trace Conditions' tab selected. The dialog has a title bar with a question mark and a close button. Below the title bar is a section titled 'Define Trace Conditions' with a red 'X' icon. The main area contains the question 'Under which condition(s) should a request be traced?'. There are three options: 'Status code(s):' which is checked and has a text box containing '300-600' and an example '401.3-999,405'; 'Time taken (in seconds):' which is unchecked and has an empty text box; and 'Event severity:' which is unchecked and has a dropdown menu set to 'Error'. At the bottom are four buttons: 'Previous', 'Next', 'Finish', and 'Cancel'.

- 5 Select **Finish** to save the edited rule.

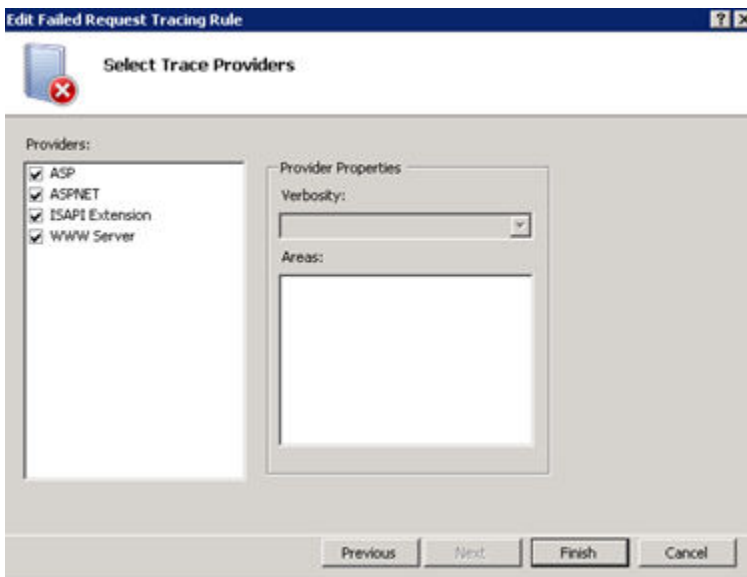

The screenshot shows the 'Edit Failed Request Tracing Rule' dialog box with the 'Select Trace Providers' tab selected. The dialog has a title bar with a question mark and a close button. Below the title bar is a section titled 'Select Trace Providers' with a red 'X' icon. The main area is divided into two panes. The left pane, titled 'Providers:', contains a list of providers with checkboxes: 'ASP' (checked), 'ASP.NET' (checked), 'ISAPI Extension' (checked), and 'WWW Server' (checked). The right pane, titled 'Provider Properties', contains a 'Verbosity:' dropdown menu and an 'Areas:' text box. At the bottom are four buttons: 'Previous', 'Next', 'Finish', and 'Cancel'.

- To disable Failed Request Tracing, select **Failed Request Tracing** on the right hand toolbar. Then clear the **Enable** checkbox and select **OK**. Failed Request can be enabled using this method as well.

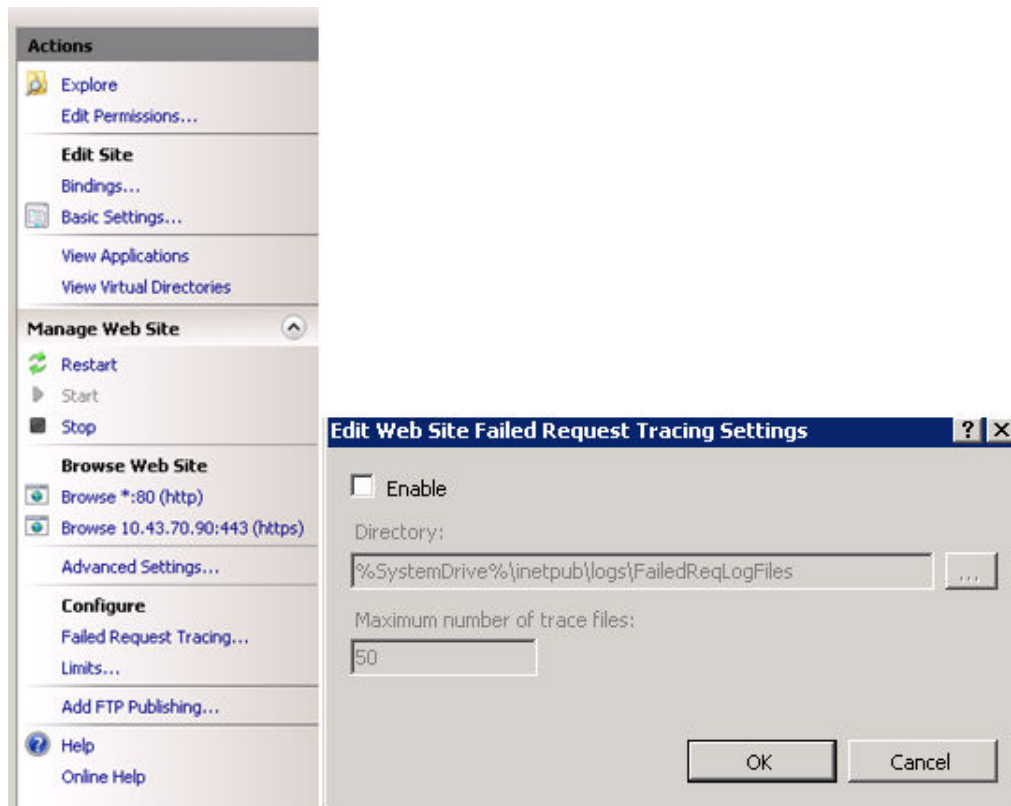

## Packet Capture

Tools such as WireShark or Microsoft's Network Monitor allow you to view the packets sent and received by the server. Knowing what to look for can help you determine where issues are occurring and isolate the reason why authentication is failing.

## Kerberos Event Logging

- Start the Registry Editor.
- Add the following registry value:

HKEY\_LOCAL\_MACHINE\SYSTEM\CurrentControlSet\Control\Lsa\Kerberos\Parameters

- Registry Value: LogLevel
- Value Type: REG\_DWORD
- Value Data: 0x1

If the Parameters subkey does not exist, create it.

Remove this registry value when it is no longer needed so that performance is not degraded on the computer. Also, you can remove this registry value to disable Kerberos event logging on a specific computer. System restart should not be required.

## Disabling CRL Checking

REGISTRY : HKLM\SYSTEM\CurrentControlSet\Services\HTTP\Parameters\SslBindingInfo

DWORD : DefaultSslCertCheckMode

Value : 1

DefaultSslCertCheckMode can take the following values. Refer to <https://msdn.microsoft.com/en-us/library/aa364647.aspx> for more info.

VALUE	MEANING
0	Enables the client certificate revocation check
1	Client certificate is not to be verified for revocation.
2	Only cached certificate revocation is to be used
4	The <u>DefaultRevocationFreshnessTime</u> setting is enabled
0x10000	No usage check is to be performed

```
netsh http show sslcert
SSL Binding added via NETSH to disable CRL:
IP:port           : 0.0.0.0:443
Certificate Hash   :
40db5bb1bf5659a155258d1d007c530fcb8996c2
Application ID    : {4dc3e181-
e14b-4a21-b022-59fc669b0914}
Certificate Store Name : My
Verify Client Certificate Revocation :
Disabled
Verify Revocation Using Cached Client
Certificate Only   : Disabled
Usage Check       : Enabled
Revocation Freshness Time : 0
URL Retrieval Timeout : 0
Ctl Identifier    : (null)
Ctl Store Name    : (null)
DS Mapper Usage   : Disabled
Negotiate Client Certificate : Disabled
```


Client Certificate Revocation is always enabled by default.

## Errors and Solutions

### Error A: Cannot find Kerberos or its dependencies

#### Solution:

- Check the **Path** Environment Variable to ensure that the {AirWatchInstallDirectory}\KerberosFiles is entered.

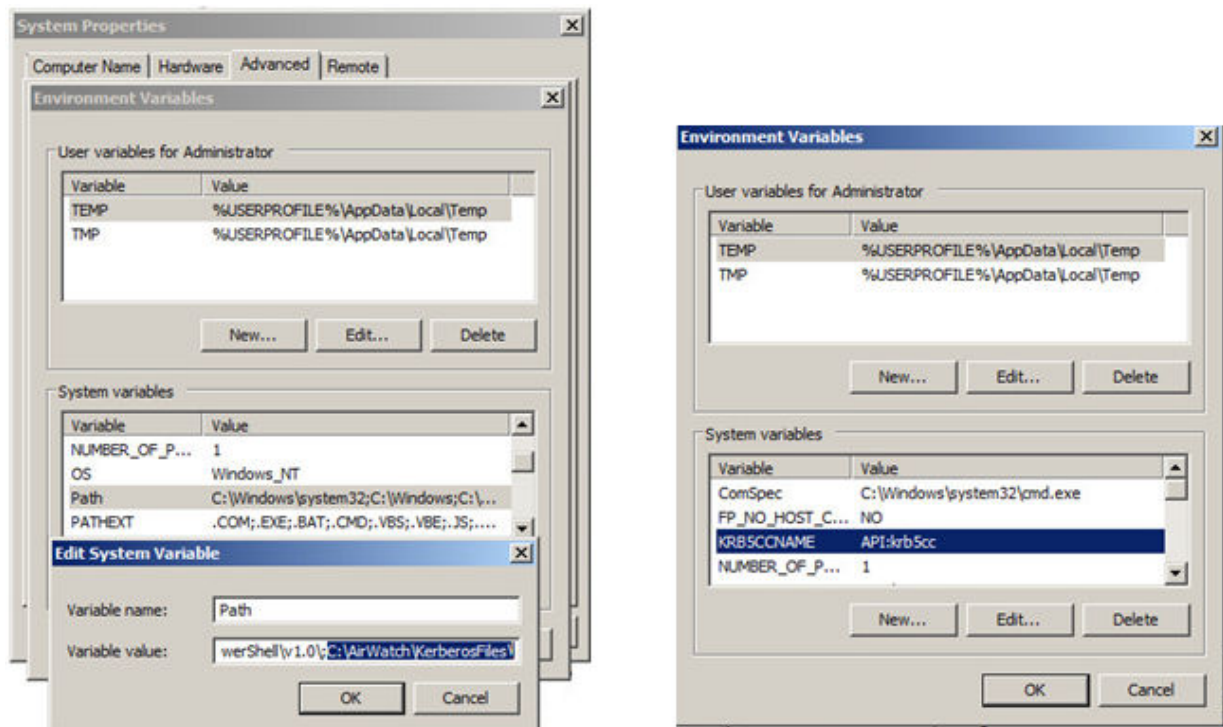


### Error B: Return 500 at Beginning of Request

#### Solution:

- 1 Check identity of secureEmailGateway application pool. It should be set to NetworkService.

- 2 Check that the App Pool is set to Enable 32-Bit application mode.

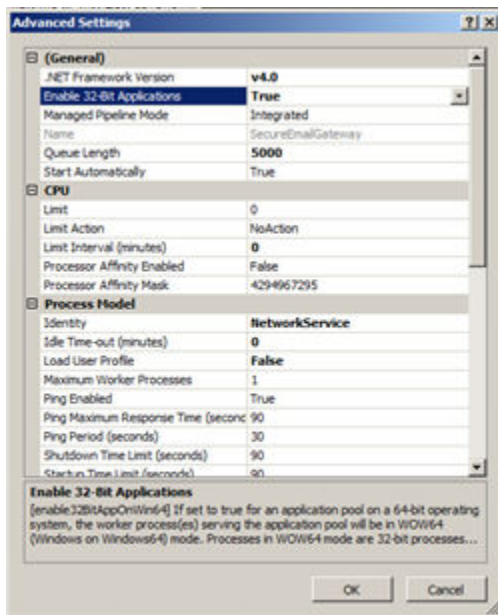


## Error C: Get Kerberos token failed

### Solution:

- 1 Check DNS, make sure exchange server is pingable.
- 2 Check that C:\Program Data\MIT\Kerberos5\krb5.ini is configured correctly.
- 3 Perform the steps for the error **0x34 - KRB\_ERR\_RESPONSE\_TOO\_BIG: Response too big for UDP (Token Error)**:
  - a Start regedit on the SEG server.
  - b Browse to **HKEY\_LOCAL\_MACHINE\System\CurrentControlSet\Control\Lsa\Kerberos\Parameters**.
  - c Create a Dword called MaxPacketSize.

- d Change the value of the Dword to 1.

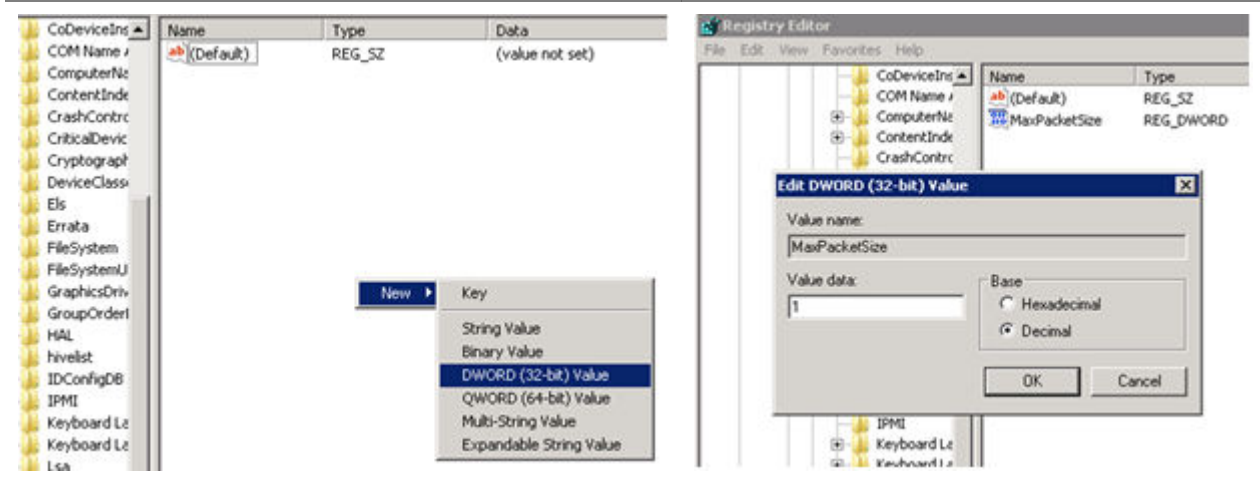

## Error D: NTAAuth Store is Missing Root CA Certificate


- Add the Issuing and Root CA certificates to the NTAAuth store using the following command:

```
certutil -enterprise -addstore NTAAuth CA_CertFilename.cer
```

## Error E: Exchange returns 401 with correct SEG configuration

### Solution:

- 1 If Exchange server returns a 401, add NTLM and Negotiate as providers to Windows Authentication.

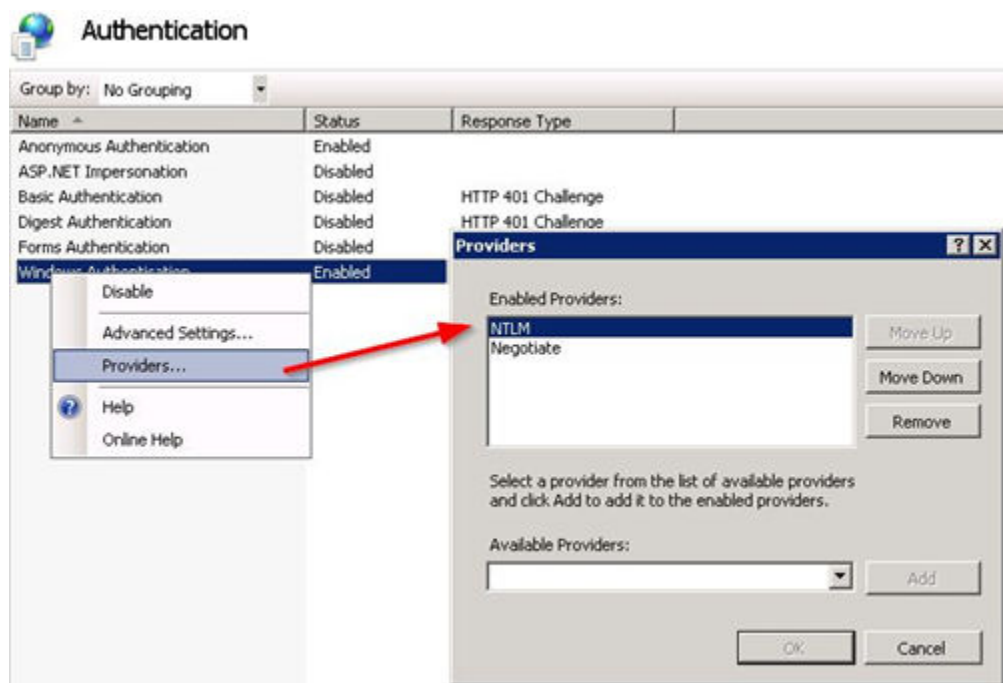



- 2 Make sure that a certificate is being issued by the CA to the device by checking the following information:
  - a Go to the internal CA Server, launch the certification authority application, and browse to the issued certificates section.
  - b Find the last certificate that was issued and it should have a subject that matches the one created in the certificate template section earlier in this documentation.

If there is no certificate then there is an issue with the CA, client access server (e.g., SCEP), or with the Workspace ONE connection to client access server.

- a Check that the permissions of the client access server (e.g., SCEP) Admin Account are applied correctly to the CA, and the template on the CA.
  - b Check that the account information is entered correctly in the Workspace ONE configuration.
  - c Verify the Server URL and the SCEP Challenge URL contain the correct information and end with a "/".
  - d Launch a browser and enter the SCEP Challenge URL. The website should prompt you for credentials. After entering the SCEP Admin Account username and password, it should return with the challenge passphrase.
- 3 If the certificate is being issued, make sure that it is in the Profile Payload and on the device.
  - a Navigate to **Devices > Profiles > List View**. Click the action icon for the device and select **View XML** to view the profile XML. There is certificate information that appears as a large section of text in the payload.
  - b On the device, go to the profiles list, select **Details** and see if the certificate is present.
  - c Confirm that the certificate contains the **Subject Alternative Name (or SAN)** section and that in that section there is an **Email** and **Principal** name with the appropriate data. If this section is not in the certificate then either the template is incorrect or the certificate authority has not been configured to accept SAN. See [Configure IIS for Certificate Authentication on SEG](#).
  - d Confirm that the certificate contains the Client Authentication in the Enhanced Key Usage section. If this is not present, then the template is not configured correctly.
- 4 If the certificate is on the device and contains the correct information, then the problem is most likely with the security settings on the SEG server.
  - Confirm that the address of the SEG server is correct in the Workspace ONE profile and that all the security settings have been adjusted for allowing certificate authentication on the SEG server.
- 5 A very good test to run is to manually configure a single device to connect to the SEG/EAS server using certificate authentication. This should work outside of Workspace ONE network and until this works properly, you cannot configure Workspace ONE to connect to EAS with a certificate.
  - Refer to the External References and Documents section for a link to a step by step guide for configuring a device to connect to EAS using a certificate.

- 6 If none of the steps above resolve the problem, try authenticating independent of Workspace ONE. This is done by eliminating the Workspace ONE (e.g., SEG) and only using a certificate to authenticate the device. If this doesn't work then there are other problems occurring. Until those problems are resolved, you will not be able to use the SEG to handle certificate authentication.
- 7 If you cannot authenticate, verify the clocks on the SEG and Kerberos. Kerberos produces a ticket for the SEG to authenticate the user on the mail server. The timestamp on that ticket must be no more than five minutes apart from the SEG's time clock. Verify the time clock on the SEG and Kerberos are within five minutes apart. You also might want to consider the use of Network Time Protocol daemons to keep all time clocks synchronized.
- 8 If you cannot authenticate, evaluate your network. If you only have one Kerberos server configured, it is possible the server is not operational. Without it, no one can log in. To stop this from occurring, you might consider using multiple Kerberos servers and fallback authentication mechanisms.

## Appendix

### Install the Role in IIS, EAS with SEG on Windows Server 2008 or Windows Server 2008 R2

- 1 On the taskbar, select **Start**, point to **Administrative Tools**, and then select **Server Manager**.
- 2 In the **Server Manager** hierarchy pane, expand **Roles**, and then select **Web Server (IIS)**.
- 3 In the **Web Server (IIS)** pane, scroll to the **Role Services** section, and then select **Add Role Services**.
- 4 On the **Select Role Services** page of the **Add Role Services Wizard**, select **Client Certificate Mapping Authentication**, and then select **Next**.
- 5 On the **Confirm Installation Selections** page, select **Install**.
- 6 On the **Results** page, select **Close**.

### Install the Role in IIS, EAS with SEG on Windows Server 2012 or Windows Server 2012 R2

- 1 On the taskbar, select **Server Manager**.
- 2 In **Server Manager**, select the **Manage** menu, and then select **Add Roles and Features**.
- 3 In the **Add Roles and Features wizard**, select **Next**. Select the installation type and select **Next**. Select the destination server and select **Next**.
- 4 On the **Server Roles** page, expand **Web Server (IIS)**, expand **Web Server**, expand **Security**, and then select **Client Certificate Mapping Authentication**. select **Next**.
- 5 On the **Select features** page, select **Next**.
- 6 On the **Confirm installation selections** page, select **Install**.
- 7 On the **Results** page, select **Close**.