

# VMware Skyline Collector User Guide

VMware Skyline Collector 2.4



vmware®

You can find the most up-to-date technical documentation on the VMware website at:

<https://docs.vmware.com/>

If you have comments about this documentation, submit your feedback to

[docfeedback@vmware.com](mailto:docfeedback@vmware.com)

**VMware, Inc.**  
3401 Hillview Ave.  
Palo Alto, CA 94304  
[www.vmware.com](http://www.vmware.com)

Copyright © 2020 VMware, Inc. All rights reserved. [Copyright and trademark information.](#)

# Contents

- 1** About VMware Skyline Collector User Guide 4
- 2** Network Requirements 5
- 3** Access the Skyline Collector 6
- 4** System Status 7
  - Manage Collector 7
  - Restart Collector 8
  - Stop Collector 8
  - Products Added 9
- 5** Configuration 11
  - vCenter Server 12
  - NSX Manager 14
  - Horizon View 15
  - vRealize Operations 16
  - Network Configuration 18
  - Auto-Upgrade 19
  - Collector Name 20
  - Active Directory Authentication 20
  - Web Server Certificate 21
  - Root Password Expiration 21
- 6** Change the admin Account Password 23
- 7** Update Skyline Collector 24
- 8** Customer Experience Improvement Program (CEIP) 25

# About VMware Skyline Collector User Guide



The VMware Skyline Collector User Guide provides instructions for the VMware® Skyline™ Collector. The guide contains information about managing the Skyline Collector, adding, editing, or removing products, and information regarding the privacy and security of data that VMware receives.

## Intended Audience

This information is intended for anyone who wants to work with the VMware Skyline Collector. It is written for VMware® vSphere® administrators.

## VMware Technical Publications Glossary

VMware Technical Publications provides a glossary of terms that might be unfamiliar to you. For definitions of terms as they are used in VMware technical documentation, go to <https://www.vmware.com/support/pubs/>

# Network Requirements

# 2

The Skyline Collector has the following networking requirements, to ensure proper communication between the Skyline Collector and all products and services.

The Skyline Collector requires network access to VMware products and solutions within your environment, and external network access to VMware.

**Table 2-1. External Network Requirements**

Connection From	Connection To	Type	Protocol	Port
Skyline Collector	vcsa.vmware.com	HTTPS	TCP/IP	443
Skyline Collector	vapp-updates.vmware.com	HTTPS	TCP/IP	443

**Table 2-2. Internal Network Requirements**

Connection From	Connection To	Type	Protocol	Port
Skyline Collector	vCenter Server	HTTPS	TCP/IP	443
Skyline Collector	ESXi Hypervisor Hosts	HTTPS	TCP/IP	443
Skyline Collector	5.5 PSC/SSO Provider	HTTPS	TCP/IP	7444
Skyline Collector	6.0 and above PSC/SSO Provider	HTTPS	TCP/IP	443
Skyline Collector	NSX Manager	HTTPS	TCP/IP	443
Skyline Collector	Horizon Connection Server	HTTPS	TCP/IP	443
Skyline Collector	vRealize Operations Manager	HTTPS	TCP/IP	443
Web Browser	Skyline Collector	HTTPS	TCP/IP	443
Web Browser	Skyline Collector (VAMI)	HTTPS	TCP/IP	5480

**Note** The tables contain the default port values and might not match a customized environment.

# Access the Skyline Collector

# 3

You must log in to the Skyline Collector to view the status of the Skyline Collector, and to make configuration changes.

## Prerequisites

To access the Skyline Collection, you will need the Skyline Collector FQDN or IP address

## Procedure

- 1 In a web browser, go to the Skyline Collector, **`https://collector-IP-address-or-FQDN`**.
- 2 Log in as *admin*, or use an Active Directory account if you have enabled Active Directory authentication to the Collector.

The default admin password is *default*. You are required to change the *admin* password during the initial configuration of the Collector.

- 3 Click **Log In**.

# System Status

# 4

The **System Status** provides you with an overview of the Skyline Collector health, and management capabilities.

## Overview

The **Overview** section displays the health of the Skyline Collector. Additionally, the health of each product added to the Skyline Collector is displayed.

## Collector

The [Manage Collector](#) section allows you to Stop, and Restart the Collector, view Collector details, and view the latest log entries for the Skyline Collector.

## Endpoints

You can view the products added to the Skyline Collector, including the health of each product endpoint.

This chapter includes the following topics:

- [Manage Collector](#)
- [Products Added](#)

## Manage Collector

You can view Skyline Collector details, and Restart or Stop the Collector.

The Manage Collector page displays the following information for the Skyline Collector.

Property	
ID	Alphanumeric unique identifier.
Last Seen	Amount of time since the Skyline Collector sent data to VMware.
Registered Under	The Cloud Services Organization the Skyline Collector is registered with.

You can perform the following actions:

- [Restart Collector](#)

## ■ Stop Collector

The **Collector Log** displays the latest log entries. You can choose to show the latest 200, 400, or 1000 log entries. This information can be used if troubleshooting with VMware Global Support Services (GSS). Click **Show Latest Log** to view the most recent log files for the Skyline Collector.

## Restart Collector

You can restart the Skyline Collector virtual appliance.

### Procedure

- 1 In the Skyline Collector, click **System Status**.
- 2 Click **Collector**.
- 3 Click **Restart**.

### Results

The Skyline Collector virtual appliance restarts. A restart takes 3 and 5 minutes to complete. The Skyline Collector may not be responsive during this time.

## Example: Restart Skyline Collector

### Manage Collector

STATUS:

✔
Your Collector is Running

ACTIONS:

↻
**RESTART**

⏻
**STOP**

DETAILS:

ID	Last Seen	Registered Under
	a few seconds ago	

COLLECTOR LOG:

Number of lines 200 ▼

**SHOW LATEST LOG**

## Stop Collector

You can stop the Skyline Collector virtual appliance from sending product usage data to VMware.

Stopping the Skyline Collector virtual appliance prevents product usage data from being sent to VMware. Do not stop the Skyline Collector virtual appliance unless troubleshooting with VMware Global Support Services (GSS).

### Procedure

- 1 In the Skyline Collector, click **System Status**.
- 2 Click **Collector**.



### 3 Click **Stop**.

#### Results

If the Skyline Collector is in a Stopped state, an alert appears within the Skyline Collector stating **Your Collector is Not Running**. Stopping the Skyline Collector does not shut down the virtual appliance. The virtual appliance remains running and the Skyline Collector remains available.

#### Example: Stop Collector

The screenshot shows the 'Manage Collector' interface. At the top, it says 'Manage Collector'. Below that, the 'STATUS:' section shows a green checkmark and the text 'Your Collector is Running'. Under 'ACTIONS:', there are two buttons: a blue 'RESTART' button and a red 'STOP' button. The 'DETAILS:' section contains a table with three columns: 'ID', 'Last Seen', and 'Registered Under'. The 'Last Seen' column has the value 'a few seconds ago'. Below the table, the 'COLLECTOR LOG:' section shows 'Number of lines' set to '200' and a blue 'SHOW LATEST LOG' button.

#### What to do next

Click **Start** to restart the Skyline Collector.

## Products Added

You can view the products added to the Skyline Collector, including the health of each product endpoint.

Each product added to the Skyline Collector is listed under the product name. The product names include vCenter Server, NSX Manager, Horizon View, and vRealize Operations.

For each product, expand the object name. Each product endpoint is displayed.

The following table lists all endpoints for each product.

Product	Endpoint
vCenter Server	VC_EXTRA
	VC_HOSTS
	VC_CHANGES
NSX Manager	NSX
Horizon View	HORIZON_VIEW
vRealize Operations	VROPS

For each product endpoint, the only action that can be performed is **Restart**. Restarting the product endpoint stops, then restarts the data collection for that particular product endpoint.

The following details are available for each product:

Property	Details
Host	Product object name.
Type	The product endpoint type.
Last Seen	The amount of time since this product endpoint collected data.
User Account	The user account used to add the product to the Skyline Collector.
Datacenter Name	The name of all data centers that the product is enabled for.

The following is available for the last known execution details.

Property	Details
Message	Details regarding whether the data collection was successful, or if there was an error.
State	Whether the data upload was successful, or not
Payload File	The filename uploaded to VMware.
Payload Size	The size of the file uploaded to VMware.
Last execution	The amount of time since the last file was uploaded to VMware.

The **Collector Log** displays the latest log entries. You can choose to show the latest 200 log, 400 log, or 1000 log entries. This information can be used if the troubleshooting with VMware Global Support Services (GSS). Click **Show Latest Log** to view the most recent log files for the Skyline Collector.

# Configuration

# 5

You can configure the Skyline Collector, including products, network configuration, and Active Directory authentication.

The following options are available within the **Configuration** page of the Skyline Collector.

- [vCenter Server](#)
- [NSX Manager](#)
- [Horizon View](#)
- [vRealize Operations](#)
- [Network Configuration](#)
- [Auto-Upgrade](#)
- [Collector Name](#)
- [Active Directory Authentication](#)
- [Web Server Certificate](#)
- [Root Password Expiration](#)

This chapter includes the following topics:

- [vCenter Server](#)
- [NSX Manager](#)
- [Horizon View](#)
- [vRealize Operations](#)
- [Network Configuration](#)
- [Auto-Upgrade](#)
- [Collector Name](#)
- [Active Directory Authentication](#)
- [Web Server Certificate](#)
- [Root Password Expiration](#)

# vCenter Server

Add, edit, or delete a vCenter Server in the Skyline Collector.

## Prerequisites

The following role/privileges are required for the account used to add the vCenter Server to the Skyline Collector. These role/privileges are sufficient for both collecting product usage data, and transferring support bundles with Log Assist.

- vCenter Server Read-Only role
- Global.Diagnostics
- Global.Health
- Global.Licenses
- Global.Settings
- Host profile.View

For detailed instructions for how to create a user account with the given permissions, see [Knowledge Base Article 59661](#).

## Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **PRODUCTS**, click **vCenter Server**.
- 3 Choose one of the following three options:

Option	Description
<b>Add vCenter Server</b>	Click <b>Add vCenter Server</b> , to add a new vCenter Server to the Skyline Collector. Follow the given steps to complete the adding of a vCenter Server to the Skyline Collector.
<b>Edit vCenter Server</b>	To edit a vCenter Server that previously was added to the Skyline Collector, click <b>Edit</b> . You can only edit the following properties for a vCenter Server: <ul style="list-style-type: none"> <li>■ Account Username</li> <li>■ Account Password</li> <li>■ PSC/SSO Host Address</li> <li>■ Collector From All Datacenters</li> </ul> After editing the vCenter Server, click <b>Update</b> .
<b>Delete vCenter Server</b>	To delete a vCenter Server that was previously added to the Skyline Collector, click <b>Delete</b> . Deleting a vCenter Server removes the vCenter Server from the Skyline Collector, and disables the collection of product usage data for that vCenter Server. Findings, Upgrade Recommendations, and Log Assist will not be available for the vCenter Server, and child objects of the vCenter Server (ESXi hosts, virtual machines).

- 4 After clicking **Add vCenter Server**, follow these steps to add a vCenter Server to the Skyline Collector.
  - a Enter the **FQDN/IP Address** of the vCenter Server.
  - b Enter a **Account Username** for connecting to the vCenter Server, from the Skyline Collector. This account must have the minimum required privileges, as detailed within the Prerequisites.
  - c Enter the **Account Password**.
- 5 If you are using an external PSC/SSO, or are using a custom Single-Sign-On domain, toggle the **Use**



**Custom SSO Configuration** button to the right. The switch states **Yes**, and turns Green [  ].

- a Enter the **PSC/SSO Host Address**.
- b If you did not change the PSC/SSO configuration from the default, you DO NOT have to complete the Advanced Options (Optional) fields. If you are using a custom SSO domain, enter the **SSO Admin URL**, **SSO STS URL**, and **Lookup Service URL** for the custom SSO domain.

To locate your SSO domain Advanced Options, see the vCenter Server vpxd.cfg file.

- In vCenter Server Appliance 6.x, the vpxd.cfg file is at /etc/vmware-vpx/.
- In Windows Server, the vpxd.cfg file is at C:\ProgramData\VMware\VMware VirtualCenter\vpxd.cfg.
- In vCenter Server 6.0, the vpxd.cfg file is at C:\ProgramData\VMware\vCenterServer\cfg\vmware-vpx.

- 6 You can choose to collect product usage data from all data centers managed by the vCenter Server, or select which data centers to include in the collection of product usage data. A Datacenter consists of the ESXi hosts, virtual machines, and the configuration, feature usage, and perform data for these objects.

Option	Description
<b>Yes, Collect from All data centers</b>	To Collect from All data centers, toggle the switch to the right. The switch states <b>Yes</b> , and turns Green [  ]. The Skyline Collector collects product usage data from all data centers managed by the vCenter Server.
<b>No, only Collect from select data centers</b>	To only Collect from select data centers, toggle the switch to the left. The switch states <b>No</b> , and turns Grey [  ]. Click <b>Add</b> . A list of data centers are displayed. Check the <b>checkbox</b> next to each Datacenter that you want to include in Skyline.

- 7 To complete adding the vCenter Server to the Skyline Collector, click **Add**.

## Results

This vSphere environment is analyzed for potential issues, security vulnerabilities, impacts to usability, and configuration recommendations. The results of this analysis appear in Skyline Advisor. Repeat this process to add additional vCenter Servers to the Skyline Collector.

---

**Note** Disabling product use data collection from select data centers may prohibit VMware from providing an optimal support experience.

---

## NSX Manager

Add, edit, or delete an NSX Manager in the Skyline Collector.

### Prerequisites

NSX for vSphere has two options for assigning role/privileges for the account used to add NSX Manager to the Skyline Collector.

For the collection of product usage data only:

- NSX Auditor

---

**Important** If an account with the NSX Auditor role is used to add NSX Manager, the following is displayed within Skyline Advisor:

- On the Collector Details page, the Status of the NSX Manager is: Insufficient Privileges.
- On the Initiate Log Transfer page, the Privileges check for NSX Manager, and all NSX components fail.

If using an account with the NSX Auditor role, you cannot transfer support bundles to VMware GSS using Skyline Log Assist.

---

For the collection of both product usage data, and transferring support bundles with Log Assist:

- NSX Administrator

### Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **PRODUCTS**, click **NSX Manager**.

### 3 Choose one of the following three options:

Option	Description
<b>Add NSX Manager</b>	To add a new NSX Manager to the Skyline Collector, click <b>Add NSX Manager</b> . Follow the given steps to add an NSX Manager to the Skyline Collector.
<b>Edit NSX Manager</b>	To edit an NSX Manager that previously was added to the Skyline Collector, click <b>Edit</b> . You can only edit the following properties for an NSXManager: <ul style="list-style-type: none"> <li>■ Account Username</li> <li>■ Account Password</li> </ul> After editing the NSX Manager, click <b>Update</b> .
<b>Delete NSX Manager</b>	To delete an NSX Manager that was previously added to the Skyline Collector, click <b>Delete</b> . Deleting an NSX Manager removes the NSX Manager from the Skyline Collector, and disables the collection of product usage data for that NSX Manager. Findings, Upgrade Recommendations, and Log Assist will not be available for the NSX Manager, and child objects of the NSX Manager (NSX Controllers, NSX Edges).

### 4 After clicking **Add NSX Manager**, follow these steps to add an NSX Manager to the Skyline Collector.

- a Enter the **FQDN/IP Address** of the NSX Manager.
- b Enter a **Account Username** for connecting to the NSX Manager, from the Skyline Collector. This account must have the minimum required privileges, as detailed within the Prerequisites.
- c Enter the **Account Password**.

### 5 To complete adding the NSX Manager to the Skyline Collector, click **Add**.

This NSX for vSphere environment is analyzed for potential issues, security vulnerabilities, impacts to usability, and configuration recommendations. The results of this analysis appear in Skyline Advisor. Repeat this process to add additional NSX Managers to the Skyline Collector.

## Horizon View

Add, edit, or delete a Horizon Connection Server in the Skyline Collector.

### Prerequisites

The following role/privileges are required for the account used to add the Horizon Connection Server to the Skyline Collector. These role/privileges are sufficient for both collecting product usage data, and transferring support bundles with Log Assist.

- Administrator (read-only) Role
- Collect Operation Logs

**Important** If you are using Skyline Collector version 2.3, or below, you must create a new role for Horizon View with the Collect Operations Logs privilege. The role must be named **LogCollector**.

For Skyline Collector version 2.4, there is no requirement to name the role **LogCollector**.

## Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **PRODUCTS**, click **Horizon View**.
- 3 Choose one of the following three options:

Option	Description
<b>Add Horizon View</b>	To add a new Horizon Connection Server to the Skyline Collector, click <b>Add Horizon View</b> . Follow the given steps to add a Horizon Connection Server to the Skyline Collector.
<b>Edit Horizon View</b>	To edit a Horizon Connection Server that was previously added to the Skyline Collector, click <b>Edit</b> . You can only edit the following properties for a Horizon Connection Server: <ul style="list-style-type: none"> <li>■ Account Username</li> <li>■ Account Password</li> </ul> After editing the Horizon Connection Server, click <b>Update</b> .
<b>Delete Horizon View</b>	To delete a Horizon Connection Server that was previously added to the Skyline Collector, click <b>Delete</b> . Deleting a Horizon Connection Server removes the Horizon Connection Server from the Skyline Collector, and disables the collection of product usage data for that Horizon Connection Server. Findings, Upgrade Recommendations, and Log Assist will not be available for the Horizon Connection Server.

- 4 After clicking **Add Horizon View**, follow these steps to add a Horizon Connection Server to the Skyline Collector.
  - a Enter the **FQDN/IP Address** of the Horizon Connection Server.
  - b Enter a **Account Username** for connecting to the Horizon Connection Server, from the Skyline Collector. This account must have the minimum required privileges, as detailed within the Prerequisites.
  - c Enter the **Account Password**.
- 5 To complete adding the Horizon Connection Server to the Skyline Collector, click **Add**.

## Results

This Horizon View environment is analyzed for potential issues, security vulnerabilities, impacts to usability, and configuration recommendations. The results of this analysis appear in Skyline Advisor. Repeat this process to add additional Horizon Connection Servers to the Skyline Collector.

## vRealize Operations

Add, edit, or delete a vRealize Operations Manager in the Skyline Collector.



## Prerequisites

**Note** Skyline, and vRealize Operations, do not support the transferring of support bundles to VMware GSS using Skyline Log Assist.

The following role/privileges are required for the account used to add the vRealize Operations Manager to the Skyline Collector. These role/privileges are sufficient for collecting product usage data.

- vRealize Operations Read-Only Role

## Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **PRODUCTS**, click **vRealize Operations**.
- 3 Choose one of the following three options:

Option	Description
<b>Add vRealize Operations</b>	To add a new vRealize Operations Manager to the Skyline Collector, click <b>Add vRealize Operations</b> . Follow the given steps to add a vRealize Operations Manager to the Skyline Collector.
<b>Edit vRealize Operations</b>	To edit a vRealize Operations Manager that was previously added to the Skyline Collector, click <b>Edit</b> . You can only edit the following properties for a Horizon Connection Server: <ul style="list-style-type: none"> <li>■ Account Username</li> <li>■ Account Password</li> </ul> After editing the vRealize Operations Manager, click <b>Update</b> .
<b>Delete vRealize Operations</b>	To delete a vRealize Operations Manager that was previously added to the Skyline Collector, click <b>Delete</b> . Deleting a vRealize Operations Manager removes the vRealize Operations Manager from the Skyline Collector, and disables the collection of product usage data for that vRealize Operations Manager. Findings, and Upgrade Recommendations will not be available for the vRealize Operations Manager.

- 4 After clicking **Add vRealize Operations**, follow these steps to add a vRealize Operations Manager to the Skyline Collector.
  - a Enter the **FQDN/IP Address** of the vRealize Operations Manager.
  - b Enter a **Account Username** for connecting to the vRealize Operations Manager, from the Skyline Collector. This account must have the minimum required privileges, as detailed within the Prerequisites.

If using a Active Directory account, enter the username only. You do not need to provide the domain name.

Example, for the user admin@corp.local, enter '**admin**' only.

- c Enter the **Account Password**.
- d To use a domain user account for adding the vRealize Operations Manager to the Skyline Collector, enter the Authentication Source name. This is the domain name.

For the Domain CORP.LOCAL, enter **CORP** within the Authentication Source text field.

- 5 To complete adding the vRealize Operations Manager to the Skyline Collector, click **Add**.

### Results

This vRealize Operations Manager is analyzed for potential issues, security vulnerabilities, impacts to usability, and configuration recommendations. The results of this analysis appear in Skyline Advisor. Repeat this process to add additional vRealize Operations Managers to the Skyline Collector.

## Network Configuration

Configure hostname verification, and configure a proxy, for the Skyline Collector communication to VMware.

Hostname Verification verifies that the Skyline Collector is connecting to VMware (vcsa.vmware.com), by looking at the 'dnsName' and 'subjectAltName'. Hostname Verification ensures customer product usage data is being sent to VMware.

Also, the Skyline Collector supports a proxy for accessing the Internet.



### Prerequisites

Ensure the Skyline Collector can communicate with the following external network destinations:



- vcsa.vmware.com
- vapp-updates.vmware.com


### Procedure

- 1 Click **Configuration** in the Skyline Collector user interface.
- 2 Under **COLLECTOR**, click **Network Configuration**.
- 3 Follow these steps to Enable, or Disable, Hostname Verification.

Option	Description
<b>Enable Hostname Verification</b>	To enable Hostname Verification, toggle the switch to the right. The switch states <b>Enabled</b> , and turns Green [  ].
<b>Disable Hostname Verification</b>	To disable Hostname Verification, toggle the switch to the left. The switch states <b>Disabled (Not Recommended)</b> , and turns Grey [  ].

- 4 To configure a Proxy for the Skyline Collector, follow these steps.

Option	Description
<b>Enable Proxy</b>	To enable a Proxy, toggle the switch to the right. The switch states <b>Enabled</b> , and turns Green [  ]. Follow the given steps to complete the Proxy configuration.
<b>Disable Proxy</b>	To disable a Proxy, toggle the switch to the left. The switch states <b>Disabled</b> , and turns Grey [  ]. No further action is needed.

- a Enter the Proxy **IP Address**.
- b Enter the Proxy **Port Number**.
- c If necessary to authenticate to the Proxy, toggle the Authentication switch to the right. The switch states **Enabled**, and turns Green [  ].
- d Enter the Proxy **Username**.
- e Enter the Proxy **Password**.

- 5 Click **Test & Save**.

## Auto-Upgrade

Choose whether to enable the Skyline Collector to automatically upgrade when new versions of the Skyline Collector are available.

When a new version of the Skyline Collector is made available, there are two options for upgrading your Skyline Collector.

1. Manually upgrade your Skyline Collector [ using the Skyline Collector virtual appliance management interface (VAMI).
2. Automatically upgrade your Skyline Collector by enabling Auto-Upgrade within the Skyline Collector.

Enabling Auto-Upgrade means you no-longer have to complete the manual process of checking for, and upgrading your Skyline Collector.

### Prerequisites

The Skyline Collector must be able to communicate with [vapp-updates.vmware.com](https://vapp-updates.vmware.com). For more details regarding networking requirements, see the [Skyline Planning and Deployment Guide](#).

### Procedure

- 1 In the Skyline Collector, Click **Configuration**.
- 2 Under **COLLECTOR**, click **Auto-Upgrade**.

- 3 To Enable Auto-Upgrade, toggle the switch to the right. The switch states **Yes**, and turns Green



- a Using the **dropdown menu**, pick a day of the week for the Skyline Collector to check for and install updates, if available.
- b Using the **dropdown menu**, pick a time of the day for the Skyline Collector to check for and install updates, if available.

- 4 To save your settings, click **Set Upgrade Configuration**.

### Results

If enabled, your Skyline Collector will check for updates on the day/time that you have chosen. If an update is available, your Skyline Collector will automatically be upgraded.

## Collector Name

You can create a friendly name for the Skyline Collector for ease of troubleshooting.

A friendly name describes the environment you are configuring the Skyline Collector to collect data from. This name is used to make it easier for VMware Global Support Services (GSS) to communicate the information about the Skyline Collector with you. An example is: East-Production.

The Collector Name must be between 4 and 32 characters. Letters, numbers, and the following symbols are allowed: period [.] , hyphen [-], and underscore [\_].

### Procedure

- 1 In the Skyline Collector, Click **Configuration**.
- 2 Under **COLLECTOR**, click **Collector Name**.
- 3 Enter a **Friendly Name** for the Skyline Collector.
- 4 Click **Set Friendly Name**.

## Active Directory Authentication

Allow specific Active Directory Users and Groups to access the Skyline Collector.

Enabling Active Directory Authentication within the Skyline Collector allows specific Active Directory Users and Groups to login to the Skyline Collector.

---

**Important** To modify the Active Directory configuration, login using the 'admin' account. Active Directory configuration options are disabled when logging-in to the Skyline Collector using an Active Directory User.

---

### Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **COLLECTOR**, click **Active Directory**.

- 3 Toggle the **Enable Active Directory** switch to **Yes**.
  - a Enter the **Domain Controller Address/IP**.
  - b Enter the **Port** number.
  - c Enter the **Base DN for Users** (optional).
  - d Enter the **Base DN for Groups** (optional).
  - e Enter the **Domain Name**.
- 4 Validate your Active Directory configuration by specifying an Active Directory account Username and Password. These credentials are not stored within the Skyline Collector.
  - a Enter a **Validation Account Username**.
  - b Enter a **Validation Account Password**.
- 5 Add at least one Active Directory User, or Group, that is allowed to log in to the Skyline Collector using their Active Directory Username and Password.
  - a To add a Group, click **Add Group**.
  - b To add a User, click **Add User**.
- 6 Click **Save Configuration**.

## Results

Users can now log in to the Skyline Collector using their Active Directory account information.

## Web Server Certificate

Replace the Skyline Collector Web Server Certificate used to encrypt the connection between the Skyline Collector web server and the user interface.

The Web Server Certificate is used to encrypt the connection between the Skyline Collector user interface and the local client web-browser.

### Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **SYSTEM**, click **Web Server Certificate**.
- 3 For Certificate, click **CHOOSE FILE**, then choose the custom certificate file (.cert/.cer/.crt/.pem).
- 4 For Certificate key, click **CHOOSE FILE**, then choose the custom certificate key file (.key/.pem).
- 5 Click **SET CERTIFICATE** to upload the chosen certificates to the Skyline Collector.

## Root Password Expiration

You can modify the root password expiration policy.

You can modify the root password expiration policy. This includes enabling or disabling root password expiration and the number of days after which the root password expires.



---

**Important** If the root password expires, the Skyline Collector services stop.

---

#### Procedure

- 1 In the Skyline Collector, click **Configuration**.
- 2 Under **SYSTEM**, click **Root Password Expiration**.
- 3 Follow these steps to Enable, or Disable, Root Password Expiration.

Option	Description
<b>Enable Root Password Expiration</b>	To enable Root Password Expiration, toggle the switch to the right. The switch states <b>Yes</b> , and turns Green [  ]. Choose the number of days after which the Root Password expires. You can choose between 7 and 365 days.
<b>Disable Root Password Expiration</b>	To disable Root Password Expiration, toggle the switch to the left. The switch states <b>Disabled (Not Recommended)</b> , and turns Grey [  ]. The Root Password does not expire.

- 4 Click **Save Settings**.

#### What to do next

If you have set a few days for the root password to expire, enable the Skyline Collector Password Expiry email notification available within Skyline Advisor. Within Skyline Advisor, click **Settings**, to access Email Notification Preferences. See the [Skyline Advisor User Guide](#) for more details.

# Change the admin Account Password

# 6


You can change the Skyline Collector admin user account password at any time.

To change the Skyline Collector admin account password, select the admin account at the top-right corner of the Skyline Collector, and click **Change Password** from the drop-down menu.

The new password must meet the password complexity policy as described on the Change Password page. Click **Set Password** to save the new password.

The 'admin' password must meet the following complexity requirements.

- Minimum length: 8 characters.
- Ensure string has one uppercase letter.
- Ensure string has one special case letter (!@#\$%).
- Ensure string has one digit.
- Ensure string has one lowercase letter.

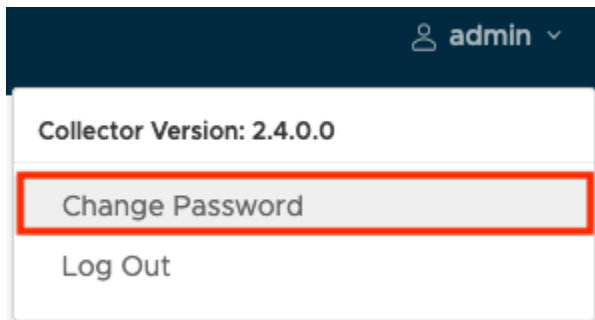

# Update Skyline Collector



You can update your Skyline Collector to the latest version using the VMware Appliance Management Interface (VAMI).

## Procedure

- 1 In a Web browser, go to the Skyline Collector VAMI, <https://collector-IP-address-or-FQDN:5480>.
- 2 Log in as *root*.
- 3 Click **Update**.
- 4 Click **Check Updates**.
- 5 If an update is available, click **Install Updates**.

## What to do next

You can enable [Auto-Upgrade](#) within the Skyline Collector to allow the Skyline Collector virtual appliance to automatically check, and upgrade, when a new version of the Skyline Collector is made available. This assists with removing the manual step of updating the Skyline Collector detailed in this topic.



# Customer Experience Improvement Program (CEIP)



Participation in the VMware Customer Experience Improvement Program (CEIP) Enhanced participation level is required as part of VMware Skyline.

Joining this program is done as part of the initial configuration of the Skyline Collector.

As part of the Enhanced Customer Experience Improvement Program (CEIP), VMware collects technical information about our customer's use of such products for the purposes given in the following section, such as to improve VMware products and services, and advise our customers on how best to deploy and use our products and services. The data collected through this Customer Experience Improvement Program (CEIP) is separate from the configuration, performance, usage, and consumption data that we collect and use to facilitate delivery of our products and services (such as tracking entitlements, providing infrastructure-related support, monitoring the performance, integrity and stability of the infrastructure, and preventing or addressing service or technical issues) Operational Data).

For additional information regarding the CEIP, see the Trust & Assurance Center at <https://www.vmware.com/solutions/trustvmware/ceip>.

By configuring your VMware products to participate in the Skyline service, each product is enabled to send product usage data to the Skyline services as part of the Customer Experience Improvement Program. You may add, remove, or modify your product configurations at any time. For detailed instructions, see [Knowledge Base \(KB\) article 74676](#).

Participation in the Customer Experience Improvement Program (CEIP) Enhanced participation level can be discontinued for a Skyline Collector at any time by deregistering the Skyline Collector. See [DeRegister Skyline Collector](#) within the [Skyline Advisor User Guide](#) for details.