

Software Content Repository Tool 6.2 Guide

Software Content Repository Tool 6.2
vRealize Configuration Manager 5.8.4

You can find the most up-to-date technical documentation on the VMware Web site at: <http://www.vmware.com/support/>

The VMware Web site also provides the latest product updates.

If you have comments about this documentation, submit your feedback to:

docfeedback@vmware.com

© 2006–2018 VMware, Inc. All rights reserved. This product is protected by U.S. and international copyright and intellectual property laws. VMware products are covered by one or more patents listed at <http://www.vmware.com/go/patents>.

VMware is a registered trademark or trademark of VMware, Inc. in the United States and/or other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.

Contents

About This Book	5
Introduction to the Software Content Repository Tool	7
Preparing for SCR Tool Installation	9
Installing the VCM Agent on the Linux and UNIX Machines to be Managed	9
Selecting and Preparing the Host Machine	10
Establish User Credentials	11
Place Trusted Certificates in the Key Store	11
Verifying Access to External Sites	11
Installing the Prerequisite Software for the SCR Tool	13
Install the SCR Tool Software	13
Download the Java Runtime Environment	14
Test the Java Runtime Environment Installation	14
Download the Java Cryptography Extension	14
Configure the SCR Tool	17
Configuring the SCR Host Machine	19
Review the Directory Structure	19
Grant Permission to the Repository	20
Update the Properties Files	20
Properties File Parameters	22
Connect the VCM Managed Machines to the SCR Tool	28
Set Logging Levels and Output File Names	28
Migrate a Host Machine from RHN to RHSM	30
Configure a Proxy Server	31
Managing Patch Content with the SCR Tool	33
Download the Patch Content	33
Schedule Downloads	34
Maintain the Software Content Repository	35
SCR Integration with VCM	35
Troubleshooting the SCR Tool	39
Out of Memory Error	39
Content Download Network Connection Error	40
Cannot Connect to Red Hat Account	40
Session Login to RedHat Fails	41
Download from Red Hat Fails	41
HP-UX Service Authentication Fails	43
Download from HP Fails	43
Proxy Server Configuration Fails	43
Mismatch in Number of Patches	45
OS Vendor Does Not Accept Credentials	45
OS Vendor Errors	45
Patch Download Errors	46

Obsolete Patches Cause the Download to Fail	47
HTTP Errors Are Not Marked as SEVERE	47
Connection Refused Errors	48
Null Pointer Exception Errors	48
SCR 6.1.21 fails to download patches	49
Index	51

About This Book

The *VMware vRealize Configuration Manager Software Content Repository Tool Guide* provides information about the following topics.

- Preparing the host machine for components and tools.
- Installing and configure components and tools.
- Using the tool to download patch content.
- Troubleshooting errors that might occur.

Intended Audience

This document contains information intended for system administrators who must patch machines in their network.

To use this information effectively, you must have a basic understanding of how to configure network resources. You also must fully understand your network's topology and resource naming conventions.

Document Feedback

VMware welcomes your suggestions for improving our documentation. If you have comments, send your feedback to docfeedback@vmware.com.

Technical Support and Education Resources

The following technical support resources are available to you. To access the current version of this book and other books, go to <http://www.vmware.com/support/pubs>.

Online and Telephone Support To use online support to submit technical support requests, view your product and contract information, and register your products, go to <http://www.vmware.com/support>. Customers with appropriate support contracts should use telephone support for priority 1 issues. Go to http://www.vmware.com/support/phone_support.html.

Support Offerings To find out how VMware support offerings can help meet your business needs, go to <http://www.vmware.com/support/services>.

VMware Professional Services VMware Education Services courses offer extensive hands-on labs, case study examples, and course materials designed to be used as on-the-job reference tools. Courses are available onsite, in the classroom, and live online. For onsite pilot programs and implementation best practices, VMware Consulting Services provides offerings to help you assess, plan, build, and manage your virtual environment. To access information about education classes, certification programs, and consulting services, go to <http://www.vmware.com/services>.

Introduction to the Software Content Repository Tool

1

The Software Content Repository (SCR) Tool is a standalone Java client software application that builds a repository of Linux and UNIX patches and downloads operating system (OS) vendor patch content to the repository.

The SCR Tool downloads patch content from vendor Web sites, which you use to patch Linux and UNIX machines. These files include patch signature files (.pls), and OS vendor patch content files (.rpm, .gz, .tar, .zip) used in the patching background processes. Deployment package files (.plp) are included and used for patch deployment on Mac OS X. The .plp files contain the vendor patch, which is extracted based on the properties file settings.


You run the SCR Tool on a Red Hat machine and use the VCM Patching functionality in VMware vRealize Configuration Manager (VCM) to deploy patches to the VCM managed machines.

To ensure that all patch dependencies are met when VCM deploys the patches, the SCR Tool downloads all of the necessary patches, except for patches that have been superseded. VCM Patching handles all the dependencies when the patches are deployed. If the patch was available when the SCR Tool was installed and configured, the patch downloads. If the patch was not available when the SCR Tool was last run, the patch will not be available. If the patch is still available from the OS vendor, it will be available for download using the SCR Tool patch replication process.

The SCR Tool is not used to run patch assessments or deployments. The SCR Tool also does not assess the machine configuration or the downloaded patch content that is used for patch deployment.

The SCR Tool downloads the patch signature files and OS-vendor patch content from the Content Download Network (CDN), and downloads subscription-only content from the OS Vendor Content Web sites. The patches must be accessible to the VCM managed machines through an NFS mount to the repository on the machine that hosts the SCR Tool. For a diagram of the components and workflow, see ["How to Download Patches with the SCR Tool" on page 8](#).

Figure 1–1. How to Download Patches with the SCR Tool

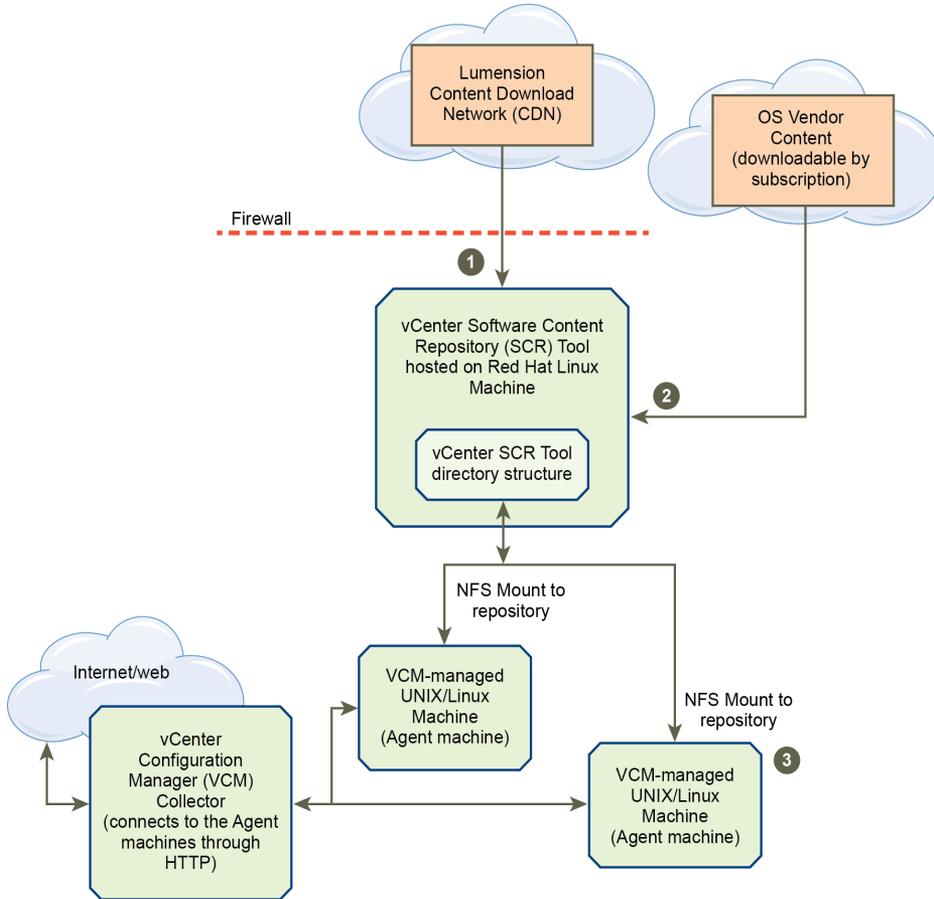

After you download patches from the vendor Web site, you must use VCM to assess your Linux and UNIX machines and deploy the patches using the machine group mapping in VCM Patching. For information about assessments, see the *VCM Administration Guide* and the VCM online Help.

Preparing for SCR Tool Installation

Before you install the SCR Tool, you must complete several prerequisite tasks.

This chapter includes the following topics:

Installing the VCM Agent on the Linux and UNIX Machines to be Managed	9
Selecting and Preparing the Host Machine	10
Establish User Credentials	11
Place Trusted Certificates in the Key Store	11
Verifying Access to External Sites	11

Installing the VCM Agent on the Linux and UNIX Machines to be Managed

VCM managed machines use an NFS mount to connect to the host machine where the SCR Tool is installed, to obtain the Linux and UNIX patches for deployment to the managed machines. After the managed machines obtain the patches, VCM can deploy the patches to those managed machines.

The following VCM managed machines can connect to the SCR Tool host machine.

NOTE VCM 5.8.4 does not support HP-UX, Mac OS X, and Solaris SPARC platforms. However, VCM 5.8.3 and earlier agents will continue to support these platforms.

- AIX
- CentOS
- HP-UX
- Mac OS X
- Oracle Enterprise Linux (OEL)
- Red Hat
- Solaris
- SUSE

Verify that the Linux and UNIX machines to be managed by VCM meet the system requirements. See the *VCM Installation Guide*. Then review the VCM Agent installation procedures and install the VCM Agent on the platform as described in the *VCM Administration Guide*.

Selecting and Preparing the Host Machine

Install the SCR Tool on supported host machines. After the host machine meets all of the requirements, it can run as a guest in a virtualized environment.

You can install the SCR Tool on a 64-bit Red Hat Enterprise Linux Server machine running version 6.0.

You can also install the SCR Tool on a 64-bit Red Hat Enterprise Linux Server machine running version 7.0.

IMPORTANT Use the host machine exclusively to run the SCR Tool and serve as the patch repository.

To download content for each supported platform for patch deployment, the minimum recommended storage is 950 GB.

NOTE VCM 5.8.4 does not support HP-UX, Mac OS X, and Solaris SPARC platforms. However, VCM 5.8.3 and earlier agents will continue to support these platforms.

Table 2–1. Estimated Host Support for Patch Storage on Platforms

Supported Platform	Minimum Storage Required for Patch Content Files and Payload
AIX	130 GB
CentOS	80 GB
HP-UX	15 GB
Mac OS X	210 GB
Oracle Enterprise Linux (OEL)	80 GB
Red Hat	80 GB
Solaris	325 GB
SUSE	75 GB

Prerequisite

- If you install the SCR Tool on a 64-bit Red Hat machine, verify that 64-bit Java is installed. If it is not installed, you must install it.

Procedure

1. Select a 64-bit Red Hat Enterprise Linux Server machine to use as the host machine for the SCR Tool.
2. Remove any non-Oracle Java versions.
3. Verify that the host machine has Internet access.
4. Verify that the host machine has adequate storage to download the patch content for each platform to support patch deployment to all of the machines.
5. Verify that the host machine has Oracle Java Runtime Environment (JRE) version 1.6 or later, 64-bit only, installed.
6. Ensure that your `JAVA_HOME` and `PATH` environments are set to the correct Java instance.

For example:

```
export PATH=/usr/java/jdk1.6.0_
24/jre/bin:/usr/local/bin:/bin:/usr/bin:/usr/local/sbin:/usr/sbin:/sbin
export JAVA_HOME=/usr/java/jdk1.6.0_24/jre
```

7. Verify that the SCR Tool host machine has Oracle Java Cryptography Extension (JCE) Unlimited Strength Jurisdiction Policy Files corresponding to the JRE version installed.
The JCE is required for the encryption of credentials to the OS vendor sites.
8. If you download Red Hat content, verify that the Red Hat Network (RHN) Management and Update entitlements are available and associated with the credentials so that SCR can download the RHN content.
9. Verify that the SCR Tool host machine has sufficient memory for the replicated files.
Linux files require up to 2 GB of memory. All other machines require 1 GB by default.
10. Allow additional memory for the overhead of host OS operations, which vary depending on your environment.

What to do next

- As your patch content increases because of downloads and storing patch content files and payload, you must monitor the available disk space on the SCR Tool host machine to avoid disk space problems. The patch content grows over time as vendors release new patches and content.
- Verify that the Linux and UNIX machines to be managed by VCM meet the system requirements. See the *VCM Installation Guide*.

Establish User Credentials

To download OS-vendor subscription-only content for AIX, HP-UX, Red Hat, Solaris, and SUSE machines, you must establish user credentials to the OS vendor sites.

Procedure

1. Contact the vendor to obtain a subscription to the patch content.
2. Establish your login and password to the vendor site.

Place Trusted Certificates in the Key Store

The Software Content Repository (SCR) Tool requires authentication to the HP-UX Software Assistant Web site. For the SCR Tool to download recommended patches, and before you use VCM to deploy patches to HP-UX managed machines, you must follow the HP recommendation to install the trusted certificate to the key store.

The HP-UX Software Assistant site checks certificates to ensure a secure connection, and validates authentication by using a trusted certificate. If you do not install the trusted certificate, the HP-UX service authentication fails, which causes the patch download to fail.

To install intermediate certificates for Software Assistant, see <http://kb.vmware.com/kb/2051577>.

Verifying Access to External Sites

Depending on the supported platform, the SCR Tool must have access to vendor sites from which to download patches and payloads.

For sites that are hosted by Akamai, use the URL instead of the resolved IP address. Sites hosted by Akamai might change IP addresses based on location.

The following sites are hosted by Akamai.

<http://configuresoft.cdn.lumension.com/configuresoft>

<http://novell.cdn.lumension.com/>

<https://a248.e.akamai.net/f/60/59258/2d/>

<http://vmware.cdn.lumension.com/>

<http://cache.lumension.com/>

Table 2–2. Access from SCR Tool to External Sites

Platform	SCR Tool must Access
All platforms	http://*.cdn.lumension.com/ https://a248.e.akamai.net/f/60/59258/2d/ http://cache.lumension.com/
AIX	http://www7b.software.ibm.com/
CentOS	http://vault.centos.org You can also use the mirrors returned from the Web service at: http://mirrorlist.centos.org
HP-UX	https://hpsc-pro-hpp.austin.hp.com/service/ https://ftp.itrc.hp.com/wpsl
Mac OS X	http://vmware.cdn.lumension.com/
Oracle Enterprise Linux (OEL)	http://public-yum.oracle.com
Red Hat 5 and 6	http://xmlrpc.rhn.redhat.com/XMLRPC
Red Hat 7	https://cdn.redhat.com
Solaris	https://getupdates.oracle.com/
SUSE	https://you.novell.com/update/ https://nu.novell.com/repo/\$RCE/ https://scc.suse.com/

Installing the Prerequisite Software for the SCR Tool

3

The SCR Tool uses several types of software. You must install and test the required software on a supported host machine, then you install the Software Content Repository Tool on the host machine.

This chapter includes the following topics:

Install the SCR Tool Software	13
Download the Java Runtime Environment	14
Test the Java Runtime Environment Installation	14
Download the Java Cryptography Extension	14

To support the downloads and storing the patch files and payload, and patch deployment, you must install and test the following software.

- SCR Tool software
- Java Runtime Environment
- (Optional) Java Cryptography Extension

Install the SCR Tool Software

After you install the supporting software, you can install the Software Content Repository Tool software on the host machine.

Prerequisites

- Complete the preparatory tasks. See ["Preparing for SCR Tool Installation" on page 9](#).

Procedure

1. Access the latest version of Download VMware vRealize Configuration Manager at <http://downloads.vmware.com>.
2. Click VMware vRealize Configuration Manager.
3. Click the **Drivers & Tools** tab.
4. Expand **VMware vRealize Configuration Manager Tools**.
5. For your VCM version tools, click **Go to Downloads**.
6. Click **Download** next to the latest version of Software Content Repository Tool (SCR).
7. Unzip the SCR Tool files from `SCR-vmware-<version>.tar.gz` to the directory where the application files will reside on the host machine.

After you extract the SCR Tool files, a root directory contains the subdirectories and files for the supported Linux and UNIX platforms. This information refers to the root directory as *scr_root*.

Download the Java Runtime Environment

You download the Java Runtime Environment (JRE) to support the SCR Tool on the host machine.

Prerequisites

- Verify that you can access <http://www.java.com>.

Procedure

1. Access the Java Web site.
2. Click **Downloads**.
3. Locate and install Java Runtime Environment (JRE) version 1.6 or later.
4. Use the platform-specific link to display detailed installation instructions for your platform.

Test the Java Runtime Environment Installation

To verify that the Java Runtime Environment installation on the Red Hat host machine works properly, you can test it.

Prerequisites

- Locate the article titled, "How do I test whether Java is working on my computer?" at <http://www.java.com>.

Procedure

1. Verify that the JRE is installed.
2. (Optional) Display the currently installed version of Java.
 - a. Open a terminal session on the SCR Tool host machine.
 - b. Run the command `java -version`.

Download the Java Cryptography Extension

The Java Cryptography Extension (JCE) is required for AIX, HP-UX, Red Hat, Solaris, and SUSE. You must download and install the JCE installation on the SCR Tool host machine. The JCE encrypts passwords when you use third party credentials in the properties files used to download patch content.

IMPORTANT If multiple Java SE (Standard Edition) Development Kit (JDK) or JRE installations exist on the same machine, make sure that you update the correct JDK or JRE instance.

Prerequisites

- Locate the Java SE downloads page at <http://www.oracle.com>.

Procedure

1. Locate and download the Java Cryptography Extension.

If the download page does not detect your Java version, manually locate the correct JCE package.

2. In the JCE zip file, locate the `README.txt` file.
3. Follow the instructions in the `README.txt` file to install the JCE on the SCR Tool host machine.

Configure the SCR Tool

VCM 5.8.4 patching for Linux and UNIX requires the Software Content Repository (SCR) Tool. To support the use of the SCR Tool, VCM uses the properties files for the Linux and UNIX platforms.

The properties files include the environment settings that the SCR Tool uses to download the patch content for each supported Linux and UNIX platform.

To integrate the SCR Tool with VCM, you must place a special bundle of properties files for the platforms in a specific directory on the patching repository machine. The properties file names use the format `<platform>-rt.properties`.

When you submit a patch download job in VCM during patch deployment, VCM reads a special bundled runtime file and uses the content in it to create additional required files. When you edit the special bundled runtime properties files, you must ensure the following restrictions.

- The runtime properties files must not contain relative paths.
- The runtime properties files must have credentials and proxy information as defined in this guide.

Prerequisites

- Download the Java Runtime Environment (JRE) to support the SCR Tool on the patching repository machine.
- Download and install the Java Cryptography Extension (JCE) on the patching repository Red Hat Linux machine where the SCR Tool is installed.
- Obtain the special bundle of properties files, `Sample-SCR-6.2-Properties.tar.gz`, at the same location where you downloaded the SCR Tool.
- Install the SCR Tool on the RedHat Linux 6, 64-bit patching repository machine, and do not modify the properties files.

Procedure

1. On the patching repository machine, download the runtime properties files tarball from the same Web site where you downloaded the SCR Tool tarball or zip file.
2. Extract the contents of the runtime properties tarball into the appropriate `/conf` directory that you established when you installed the SCR Tool.

The properties files must be named as follows:

- AIX-rt.properties
 - CENTOS-rt.properties
 - HPUX-rt.properties
 - MAC-rt.properties
 - ORACLELINUX-rt.properties
 - REDHAT-rt.properties
 - SOLARIS-rt.properties
 - SUSE-rt.properties
3. To modify the runtime properties files, use the *Software Content Repository Tool Guide*.

IMPORTANT Do not change the file names of the extracted runtime properties files.

Configuring the SCR Host Machine

Configuring the host machine to install the SCR Tool includes reviewing the directory structure, granting permission to the patch repository, updating the properties file, connecting the VCM managed machines to the SCR Tool, and setting the logging levels and output file names.

This chapter includes the following topics:

Review the Directory Structure	19
Grant Permission to the Repository	20
Update the Properties Files	20
Connect the VCM Managed Machines to the SCR Tool	28
Set Logging Levels and Output File Names	28
Migrate a Host Machine from RHN to RHSM	30
Configure a Proxy Server	31

Review the Directory Structure

Subdirectories are created and organized based on platform type and payload. Verify that the subdirectories exist in the SCR Tool root directory.

Because running the replications is based on relative paths under the root directory, you can modify the root directory name.

To determine which `.pls` files to use for patch assessments, the SCR Tool processes the XML file named in the format `VMware<version>.xml` (Example: `VMware584.xml` or `vmware584-rhsm.xml`), which contains the `.lst` files used in the assessments.

IMPORTANT Do not delete the patch signature (`.pls`) files, because they confirm whether the patches are available. Patch signature files are stored in the platform subdirectories defined by the property parameter `SCR_output_folder`.

The SCR Tool downloads patch content based on your established schedule.

Prerequisites

- After the SCR Tool downloads the content from the Content Download Network (CDN), verify that the individual payload directories contain the patch content.

Procedure

1. Open the SCR Tool root directory.

This is the directory where you unzipped the `.tar.gz` file.

2. Verify that the `.pls` files are stored in the subdirectories for each platform.

The subdirectories include `./aix`, `./centos-nca-*`, `./hpux`, `./oracle-nca-*`, `./osx`, `./redhat-nca`, `./solaris`, and `./suse-nca`.

The `platform-nca` directories indicate new content architecture directories that have alternative locations.

3. In the `payload` directory, verify that the subdirectories contain the platform vendor patch files and the `.plp` files.

The new content architecture places some patches in alternative locations.

Patches	Location
CENTOS	CentOS/rpm
OracleLINUX	Oracle/rpm
Red Hat 5,6	RedHat/getPackage/
Red Hat 7	RedHat/rpm/
SUSE	SUSE/rpm/

4. In the `payload` directory, verify that the Mac OS X payload folders contain only `.plp` files, which embed the vendor patches.

If `extractOSX=true` is defined in the properties file for Mac OS X, the physical vendor patch appears.

Grant Permission to the Repository

The host machine must have execute permission for all of the repository application files to access and update the properties files. To grant this permission, you run a command on the host machine.

Procedure

1. Go to the `scr_root` directory on the host machine.
2. Open a terminal session.
3. Change directories to the SCR root directory.
4. To change the mode, run the `chmod -R a+x **/*` command.
5. Change the working directory to `scr_root/bin`.

Update the Properties Files

User credentials and environment settings are stored in the properties files that the SCR Tool uses to download the patch content for each supported platform. The download process uses the properties files to determine how to replicate the patch content on the SCR Tool host machine for each platform.

The format for the properties file names is `platform-rt.properties`. For more information, see the **Configure the SCR Tool** section in the *VMware vRealize Configuration Manager Online help* documentation.

Each downloaded replication file requires between 512 MB of RAM (minimum) and 2 GB (maximum).

For Red Hat: If files differ between a Red Hat client and a Red Hat server, such as x86 versus x64, you must generate a separate `scr_root/conf/.properties` file for each.

Prerequisites

- Review the properties file parameters in preparation to update the properties files. See ["Properties File Parameters" on page 22](#).
- For Red Hat: When files differ between a Red Hat client, a Red Hat server, and architectures, such as x86 and x64 versions, you must generate individual properties files for the client, server, and each architecture in the SCR root directory. For example: `scr_root/conf/RedHat_version_or_arch.properties`.

Procedure

1. Access the directory named `scr_root/conf` and locate the Linux and UNIX properties files.

Platform	Properties File Name
AIX	<code>scr_root/conf/AIX-rt.properties</code>
CentOS	<code>scr_root/conf/CENTOS-rt.properties</code>
HP-UX	<code>scr_root/conf/HP-rt.properties</code>
Mac OS X	<code>scr_root/conf/OSX-rt.properties</code>
Oracle Enterprise Linux (OEL)	<code>scr_root/conf/ORACLE-rt.properties</code>
Red Hat	<code>scr_root/conf/REDHAT-rt.properties</code>
Solaris	<code>scr_root/conf/SOLARIS-rt.properties</code>
SUSE	<code>scr_root/conf/SUSE-rt.properties</code>

2. Create an encrypted password.
 - a. At the `scr_root/bin` directory prompt, type `# ./lumension_encryptor_tool.sh`.
The encryptor tool returns the string, "MyPassword".
 - b. Enter your password twice, and ignore any strings returned by the encryptor tool.
 - c. When the encryptor tool returns the encrypted password string, open the `scr_root/conf/platform-rt.properties` file and copy the string into the encrypted password field.

The entries appear as follows.

```
pwd=encryption_string
user=user_name
```

What to do next

- Update the properties file parameters for the platforms to patch. See ["Properties File Parameters" on page 22](#).
- To automate a process to run the scripts using OS schedulers, such as cron or at, see ["Managing Patch Content with the SCR Tool" on page 33](#).

Properties File Parameters

You can use the properties file parameters to customize the download process that replicates the patch content on the SCR Tool host machine.

The following parameters are available.

platform

The `platform` parameter specifies the type of patch content to download.

```
platform=platform_name
```

arch

The `arch` parameter must include one or more valid architecture strings for the specified platform. Multiple values must be comma separated without spaces.

```
arch=arch_type1, arch_type2, ...
```

connectionTimeout

The `connectionTimeout` parameter specifies the duration for the timeout in seconds. The value can range from 0 to 3600 (1 hour). The default value is 60 and infinite value is 0.

```
connectionTimeout=60
```

dist

```
dist=distribution_name
```

For Red Hat and SUSE platforms, the `dist` parameter is required. Multiple values must be comma separated without spaces.

NOTE VCM 5.8.4 does not support HP-UX, Mac OS X, and Solaris SPARC platforms. However, VCM 5.8.3 and earlier agents will continue to support these platforms.

Table 5–1. Property Parameters for Platforms, Distributions, and Architecture

platform	dist	arch
AIX		POWERPC
LINUX	CENTOS	X86, X86_64
HP_UX		PA_RISC, ITANIUM
LINUX	ORACLE	X86, X86_64
OSX		X86, PPC
LINUX	REDHAT	X86, X86_64
LINUX	SUSE	X86, X86_64
SOLARIS		X86, SPARC

folder

Defines the root folder where the SCR Tool output is stored. By default, this folder is `/tmp/SCR/download`.

```
folder=SCR_output_folder
```

The SCR Tool creates the subdirectory tree under the root output folder.

- The platform architecture directory `SCR_output_folder/platform/architecture` contains the `.pls` files.
- The payload platform architecture directory `SCR_output_folder/payload/platform/architecture` contains the patch content files, such as `.plp`, `.zip`, `.rpm`, `.htm`, and `.jar` files.

keyfile

```
keyfile=string
```

Do not modify.

key

```
key=string
```

Do not modify.

index

```
index=VMware582.xml
```

Do not modify.

program

```
program="."
```

Do not modify.

extractOSX

For the Mac OS X platform only. If the value is true, PLP files for the Mac OS X content are extracted.

When run, this parameter specifies to extract the embedded `.dmg` vendor patch files from the corresponding `.plp` files. When used with any other platform, this parameter has no effect.

```
extractOSX=true or false
```

thirdparty

Set the value to true to support third party downloads for CentOS, Oracle Linux, Red Hat, Solaris, and SUSE.

```
thirdparty=true or false
```

The SCR Tool first attempts to download payload from Lumension's CDN. If the patch is not found in the CDN, the SCR Tool downloads it from the vendor Web site, such as Red Hat, SUSE, or Solaris, using the credentials provided in `user` and `pwd`.

user

User ID for third party vendor downloads, such as Solaris or HP UX.

```
user=string
```

pwd

Encrypted password for the third party vendor downloads. This password is generated using the `lumension_encryptor_tool.sh` script.

```
pwd=string
```

configlog

This parameter specifies an output file, which contains a list of parameters and values. These values reflect the parameter configuration used during the last or current execution of the SCR Tool, and can be used to troubleshoot problems.

```
configlog=config_log_file_path/filename.log
```

checkPayload

```
checkPayload=true or false
```

Enables the SCR Tool to audit and verify payload content for `.pls` files. If the `.pls` files do not match the `.pls` or `.plp` files, this option causes the SCR Tool to download or replace the payload files.

This parameter defaults to false if not included in the properties file or not explicitly set to true. The value is set to true by default in each properties file.

- If the value is true, the SCR Tool validates every payload file for every `.pls` file, whether it is new, modified, or unchanged.
- If the value is false, or not provided, the SCR Tool downloads and loops through each new or modified `.pls` file. The process downloads any payload data, which includes `.plp` files and vendor patch files that correspond to each downloaded `.pls` file.

dependencyCheck

The `dependencyCheck` value determines which dependent RPMs are downloaded when downloading a Linux patch.

```
dependencyCheck=NONE or DIRECT or TRANSITIVE
```

- **NONE:** No dependencies are downloaded. The default value is NONE.
- **DIRECT:** Only direct dependencies will be downloaded.
- **TRANSITIVE:** The direct and transitive dependencies will be downloaded.

channels

Specifies the channels of content to download so that you can manage content according to environment needs. Multiple values must be comma separated without spaces.

```
channels=channel1, channel2, ...
```

For example, for Red Hat: `channels=es-4, server-5`

By default, excluding this switch enables all channels. By adding this switch, you can limit the duplication of content during the download by specifying only the patches or packages that apply to your environment. Duplicate content primarily affects Linux distributions.

Table 5–2. Property File Channels

Platform	Channel
AIX	6_1
	7_1
	technologylevel_aix61
	technologylevel_aix71
CentOS	cent5, cent6, cent7
HP-UX	11_11
	11_23
	11_31
Oracle Enterprise Linux (OEL)	ora5, ora6, ora7
OSX	10_6
	10_7
	10_8
	applications
Red Hat	client-5
	server-5
	workstation-6
	server-6
	client-7
	workstation-7
Solaris	sol10
SUSE	SLES10-Updates
	SLES10-SP1
	SLES10-SP2
	SLES10-SP3
	SLES10-SP4
	SLES11-Updates
	SLES12-Updates
	SLES11-SP1
	SLES11-SP2
	SLES11-SP3

downloadPayload

If the value is true, all patches are downloaded. If the value is false, only the patches with UIDs that are included in the cache request folder are downloaded. If the value is false and there is no cache request XML, the content is processed but no patches are downloaded.

`downloadPayload=true` or `false`

cacheRequestFolder

`cacheRequestFolder=path/CacheRequest.xml`

The cache request XML file is used to limit the downloaded patches to only those for which you obtain UUIDs from the `ecm_sysdat_patch_pls` table in the VCM database.

Extract the `.pls` UUIDs from the database and create an XML file similar to the one below, then update the `cacheRequestFolder` path to the file location.

To obtain the UUID of a patch, run the following command where the name is required to find the patch for the architecture and version, and the identifier is the name of the bulletin to download the patch using the UUID. In this example, the identifier value is `RHBA-2007:0622-02`.

```
select name, [uid]
from ecm_sysdat_patch_pls
where identifier = 'RHBA-2007:0622-02'
```

To include the prerequisites for the patch, use the following queries.

```
select name, [uid],prerequisite_uids
from ecm_sysdat_patch_pls
where identifier = 'RHBA-2007:0622-02'
```

To include the prerequisites for the prerequisite patches, use the following query where `{13A7294C-2D7C-4CA2-AD7D-10592D79C9B9}` is a prerequisite for `RHBA-2007:0622-02`.

```
select name, prerequisite_uids
from ecm_sysdat_patch_pls
where [uid] = '{13A7294C-2D7C-4CA2-AD7D-10592D79C9B9}'
```

Here is a sample cache request file.

```
<CacheRequests>
<Request>
<PatchID type="UUID">
{8E4D5C21-51A6-43B0-AA63-DBB5B51DD9D2}
</PatchID>
</Request>
<Request>
<PatchID type="UUID">
{DD1A967A-CB04-4C30-A18F-6C46A5568019}
</PatchID>
</Request>
<Request>
<PatchID type="UUID">
{E3A8AF68-58EA-4B71-B6E2-173230C3EF64}
</PatchID>
</Request>
```

```
</CacheRequests>
```

proxyServer

Proxy server IP address.

```
proxyServer=IP_address
```

proxyPort

Proxy server port.

```
proxyPort=port_number
```

proxyUser

User ID for proxy server authentication.

```
proxyUser=string
```

proxyPwd

Encrypted password for the proxy server. This password is generated using the `lumension_encryptor_tool.sh` script.

```
proxyPwd=string
```

tmpDir

Temporary working directory that the AIX patch replication script uses to download and create `.tar.gz` files. Although the AIX patches are comprised of files, the SCR Tool and VCM depend on the `.tar.gz` files for patch deployment. The patch replication process downloads individual files into `/tmpDir`, which are compressed into a `.tar.gz` file that VCM uses for bulletin information in the deployment script. The user who runs the SCR Tool must have read and write permissions to this directory.

```
tmpDir=/tmp/
```

Certificate

The file containing your RedHat entitlement certificate. This file is created in `/etc/pki/entitlement` by `subscription-manager` when you attach a subscription to your registered RedHat system. The filename of the certificate varies but is always in the form `XXXXXXXXXXXXXXXXXXXXX.pem` where `X` is a decimal digit. If there are multiple certificates in this location, you can view their contents with OpenSSL by running `openssl x509 -in cert-file.pem -noout -text`, substituting the actual filename of your certificate.

If you attempt to download RedHat 7 RPMs without setting a certificate, the following error message appears

```
java.lang.IllegalArgumentException: certificate cannot be null or not a file
```

For example

```
certificate=/etc/pki/entitlement/5280746408908734973.pem
privateKey=/etc/pki/entitlement/5280746408908734973-key.pem
```

The following command is used to register RHEL7 with Red Hat Subscription Management:

```
subscription-manager register --username <User_Name> --password <Pass_Word> -
-auto-attach
```

sles12User

```
sles12User=SCC_ba7.....db1
```

sles12Pwd

```
sles12Pwd=167.....871
```

SuSE12 specification

sles12User and **sles12 Pwd** parameters are required for SLES12 platform.

1. New credentials are now needed to access SUSE12 content and is through subscription management at <https://scc.suse.com>, the SUSE Customer Center (SCC).
 - a. Create an account if you do not have one created.
 - b. Purchase the appropriate subscription (SUSE Enterprise Desktop or Server) from <https://www.suse.com/shop/>.

Note: SCC processes new subscription purchases usually within a few days.
 - c. Register any one SUSE12 host(s) from the host or VM through SUSE Customer Center Configuration application under YaST Administration Settings. The SCR repository host registration is not mandatory for SCR executions.
2. Enter subscription credentials in the SCR repository machine at `../conf/suse-rt.properties` for **sles12User** or **sles12Pwd** properties.

For example, new Suse-rt.properties:

```
...
#SUSE12 Customer Center (SCC) Credentials
sles12User=SCC_ba7.....db1
sles12Pwd=167....871
```

Once you register the SLES12 Hosts to SCC , SCCcredentials file is created under `/etc/zypp/credentials.d/SCCcredentials`. Enter appropriate values for **sles12User** and **sles12Pwd** available at `/etc/zypp/credentials.d/SCCcredentials`.

Connect the VCM Managed Machines to the SCR Tool

To establish communication between the managed machines and the host machine, connect the VCM managed machines to the SCR Tool.

Procedure

Connect the managed machines to the SCR Tool. You must take this action for each platform type.

- Create a mount point to the respective platform directory on the SCR Tool machine that contains the patch payload for the platform.
- Use a remote command to mount the VCM managed machine at the time of patch deployment.
- Use a remote command to FTP the files to the managed machine when the patches are deployed.

Set Logging Levels and Output File Names

The SCR Tool provides flexible logging settings and properties to customize your logging levels.

The logging levels and output file names reside in the individual `<platform>-rt.properties` file for each platform type.

Table 5–3. Property Files with Logging Levels and Output File Names

Platform	Properties File Name
AIX	<code>scr_root/conf/AIX-rt.properties</code>
CentOS	<code>scr_root/conf/CENTOS-rt.properties</code>
HP-UX	<code>scr_root/conf/HP-rt.properties</code>
Mac OS X	<code>scr_root/conf/OSX-rt.properties</code>
Oracle Enterprise Linux (OEL)	<code>scr_root/conf/ORACLE-rt.properties</code>
Red Hat	<code>scr_root/conf/REDHAT-rt.properties</code>
Solaris	<code>scr_root/conf/SOLARIS-rt.properties</code>
SUSE	<code>scr_root/conf/SUSE-rt.properties</code>

You can set the custom logging levels and output file names in these properties files for each run of the SCR Tool. You can use specific logging parameters for each specific patch distribution.

Procedure

1. Locate and open an individual `<platform>-rt.properties` file.

2. Set the following properties to the required level of logging.

```
java.util.logging.FileHandler.level
java.util.logging.ConsoleHandler.level
com.lumension.level
```

By default, all scripts log data to the same file name pattern at the INFO logging level. The logging values include several levels.

- SEVERE
 - WARNING (valid, but not used)
 - INFO (recommended for production)
 - CONFIG (valid, but not used)
 - FINE (debug)
 - FINER (debug)
 - FINEST (debug)
3. To customize log file names, change the output `java.util.logging.FileHandler.pattern=path` parameter.

- a. Verify that the `java.util.logging.FileHandler.pattern=path` entry includes the path.
For example: `../logs/scr-messages-rh-%g.log`
- b. To generate distinct file names, use special substitution variables.

Variable	Description
/	Local path name separator.
%t	System temporary directory.
%h	Value of the user.home system property.
%g	Generated number to distinguish rotated logs.
%u	Unique number to resolve conflicts.
%%	Translates to a single percent sign %.

4. To select where the log stream is written, change the `handlers=handler_name` property.

Valid values are written to the file handler log file or the console handler stderr output.

Option	Description
<code>java.util.logging.FileHandler</code>	If you use this handler, the SCR Tool generates logs in the file specified in the <code><platform>-rt.properties</code> file.
<code>java.util.logging.ConsoleHandler</code>	If you use this handler, the SCR Tool generates logs in the console.

5. To increase or decrease the number of bytes written to the log files before a new log is started, update the `java.util.logging.FileHandler.limit=bytes` value.
6. To set the maximum number of log files to retain before overwriting the oldest, update the `java.util.logging.FileHandler.count=log_file_count` value.
7. To append logging entries to the last used log file, configure `java.util.logging.FileHandler.append=true`.
If the value is false, the SCR Tool writes to a new log file.

Migrate a Host Machine from RHN to RHSM

To download Red Hat 5 & 6 RPMs, SCR must be running on a RHEL 5 or 6 system that has been migrated from RHN Classic to RHSM and is registered via RHSM. Note, the channels (`client-5`, `server-5`, `workstation-6` or `server-6`) property must correspond with the certificate based entitlement due to the new RHSM mechanism.

Procedure

1. Register the RHN Classic machine via RHN Registration tool.
2. Run the following command to install the migration tool:

```
# yum install subscription-manager-migration
subscription-manager-migration-data
```
3. Perform the migration:

```
# rhn-migrate-classic-to-rhsm
```

4. Register the machine to the new RHSM:
`# subscription-manager register`
5. View a list of available subscriptions:
`# subscription-manager list --available`
6. Attach the applicable subscription:
`# subscription-manager attach --pool=subscription pool ID`
7. Change index property (index=*.xml) value in REDHAT-rt.properties to *-rhsm.xml
For example: index=VMware583-rhsm.xml

Configure a Proxy Server

If you are using a proxy server, you must create a `.wgetrc` file under the home directory and add the proxy server details to enable communication with the SCR tool.S

Procedure:

1. Navigate to the root directory. If you are not the root user, navigate to the user home directory.
2. Create a file named `.wgetrc`.
3. Add the following lines:
`use_proxy=yes`
`http_proxy=proxyserverIP:<proxy server port>`
`https_proxy=proxyserverIP:<proxy server port>`
4. Save and close the file.
5. Start a new session to connect to the server. (For example: a new putty session)

Managing Patch Content with the SCR Tool

6

The SCR Tool downloads patch content files from the Content Download Network (CDN), which is managed by Akamai, the hosted content service provider. The SCR Tool obtains any additional patches from the AIX (IBM), CentOS, HP-UX, Mac OS X, Oracle Enterprise Linux (OEL), Red Hat, SUSE, and Solaris vendor Web sites, and saves those patches in your defined directories.

The SCR Tool performs delta downloads. After the first download, successive downloads retrieve only the differences in patch content that occurred since the last download. When the files download, the patch source, CDN, vendor, and other information is written to the log files.

IMPORTANT Do not delete the patch signature (.pls) files, because they confirm whether the patches are available. Patch signature files are stored in the platform subdirectories defined by the property parameter *SCR_output_folder*.

This chapter includes the following topics:

Download the Patch Content	33
Schedule Downloads	34
Maintain the Software Content Repository	35
SCR Integration with VCM	35

Download the Patch Content

You download patch content to the SCR Tool machine so that you can deploy the patches to the supported VCM managed machines.

Prerequisites

- If you run multiple replication processes simultaneously on a single SCR Tool host machine, verify that the host machine has sufficient memory to support each process. Insufficient memory might cause errors.

Procedure

1. To specify a schedule to run the shell commands, use a `crontab` command to run the updated properties files.
2. From the directory defined as *SCR_output_folder*, open a terminal session.
3. Run the following commands to interactively track the progress of the download.

```
date; df -k ; du -k | grep -i Vendor_Name
```

When the patch download process is finished, use VCM to patch the Linux and UNIX managed machines.

Schedule Downloads

You can use OS schedulers, such as `cron` or `at`, to automate the process to replicate the patches. Automating the patch replication process is preferable, because the download process might require you to run the startup file more than once to retrieve all of the content for a particular vendor.

The SCR Tool does not provide embedded scheduling. If you connect multiple platforms to the same repository, you must schedule the startup script to run separately for each platform.

Prerequisites

- Complete at least one replication for each operating system before you add the startup script to a scheduling service. The initial replication might take longer than one day for each operating system.

Procedure

1. On the SCR Tool machine, go to the `scr_root/bin` directory.
2. Create a file that contains a list of all platforms for which you have a content subscription.
3. Comment out the platforms that are not necessary or for which you do not have a subscription, and save the file.
4. Use the following command to create a file to schedule the replication download.
5. To replicate all platforms, add the following content to the file, omit entries for unused platforms, and save the file.

```
vim start_all_nix_replication.sh
```

```
#!/bin/sh

echo Running startup.sh aix-rt
./startup.sh aix-rt

echo Running startup.sh centos-rt
./startup.sh centos-rt

echo Running startup.sh hp-rt
./startup.sh hp-rt

echo Running startup.sh oracle-rt
./startup.sh oracle-rt

echo Running startup.sh osx-rt
./startup.sh osx-rt

echo Running startup.sh redhat-rt
./startup.sh redhat-rt

echo Running startup.sh solaris-rt
./startup.sh solaris-rt

echo Running startup.sh suse-rt
./startup.sh suse-rt
```

6. Set the mode of the script to executable.
- ```
chmod +x start_all_nix_replication.sh.
```

7. Change directory to `/etc/cron.daily`.
8. Use the following command to create a new file.

```
vim SCR
```

9. Add the following content to the file to begin the patch replication process, and save the file.

```
#!/bin/sh

cd scr_root/bin

echo "### Get all new unix content"

./start_all_nix_replication.sh
```

10. Set the mode of the file to executable.

```
chmod +x SCR
```

The script runs daily and synchronizes your patch content.

## Maintain the Software Content Repository

You can monitor the log files and activities to maintain the patch repository and its performance.

### Prerequisite

- Before you run or schedule patch content downloads, verify that the SCR Tool host machine has adequate disk space available. See ["Selecting and Preparing the Host Machine" on page 10](#).

### Procedure

1. Monitor the size of the log files.
  - If you specified a rotation in the log file properties, the log file content does not require cleanup.
  - If you did not specify a rotation, you must clean up the log file content so that it does not consume unnecessary amounts of memory.
2. Review the activities logged in the platform specific property files named `<platform>-rt.properties`.

## SCR Integration with VCM

To perform patch deployment on different \*nix platforms, SCR tool is needed in VCM. SCR tool can be installed on RHEL6.0x64Server or RHEL7.0x64Server machines depending on the requirements. This involves making appropriate changes to the VCM Administration Settings under Certificates, Unix Patching, and Machine Group Settings.

### Prerequisite

VCM supports HTTP, HTTPS, File, NFS, and FTP protocol for patch staging. You must configure the SCR RHEL box with necessary protocol as per your requirement.

### Certificate Settings

Add the RHEL machine that has SCR Tool to the VCM licensed UNIX machines, install agent and perform collection.

1. Navigate to **Administration > Certificates** in VCM after successful collection on the SCR machine.
2. Select the SCR machine and click **Change Trust Status**. Select **Check to trust or untrust the selected machines**. Click **Next** and then click **Finish**.

Now the SCR machine is trusted to download the patches.

3. Make this SCR RHEL machine as a patching repository machine. Select the SCR machine and click **Patching Repository**. Select the **Enable** option. Click **Next** and then click **Finish**.

Now the SCR machine is marked as the Patching Repository for the VCM Server.

### Additional Settings

The following settings have to be modified depending upon the protocol you have configured on the SCR machine.

Make appropriate changes to the Settings by clicking **Edit Setting** under **Administration > Settings > General Settings > Patching > Unix > Additional Settings**.

1. Default UNIX/Linux Patching repository Path (Point No.11). Path where the SCR will download the required packages. This is same as the path exposed to the protocol configured on the SCR box.
2. Default UNIX/Linux Patching repository SCR base Path (Point No.12). Base path where SCR is installed on SCR box.

### Patch Staging Settings

These settings are required for VCM to know the Protocol and Repository details that are configured on the SCR machine.

Make appropriate changes to the Settings as per the protocol used to configure the SCR tool under **Administration > Settings > General Settings > Patching > Unix > Patch Staging**.

1. Click **Add**. Enter the desired name for the setting. Click **Next**.
2. Select the option **Obtain patches from the Patching Repository: (The SCR Machine is displayed here, which we had marked as Repository machine in Certificates Settings)**. Click **Next**.
3. Enter the Repository Path that you have configured to use for your protocol. Repository path is the path where the user has exposed the default directory for their respective protocol on the SCR machine.
4. Select the protocol configured on the SCR machine and provide appropriate user credential details whenever necessary.

### Machine Group Settings

Machine Group settings are required to map the machine groups with the protocol information added in **Patch Staging Settings**.

1. Create a machine group and add all the target machines that are to be patched under this machine group.
2. Navigate to **Administration > Settings > General Settings > Patching > Machine Group Mapping**, select the machine group that you would want to patch, and click **Edit**.
3. Select your protocol (that you added in **Patch Staging Settings**) in the drop down at **Source for Staged Patches**. The URL appears with the specific protocol and the repository path. Make sure this URL is accessible from the target machines that you intend to patch.
4. Click **Next** and then click **Finish**.





# Troubleshooting the SCR Tool

---

The SCR Tool troubleshooting information provides procedures to diagnose and fix problems that you might encounter when you use the SCR Tool or download patch content.

This chapter includes the following topics:

|                                             |    |
|---------------------------------------------|----|
| Out of Memory Error                         | 39 |
| Content Download Network Connection Error   | 40 |
| Cannot Connect to Red Hat Account           | 40 |
| Session Login to RedHat Fails               | 41 |
| Download from Red Hat Fails                 | 41 |
| HP-UX Service Authentication Fails          | 43 |
| Download from HP Fails                      | 43 |
| Proxy Server Configuration Fails            | 43 |
| Mismatch in Number of Patches               | 45 |
| OS Vendor Does Not Accept Credentials       | 45 |
| OS Vendor Errors                            | 45 |
| Patch Download Errors                       | 46 |
| Obsolete Patches Cause the Download to Fail | 47 |
| HTTP Errors Are Not Marked as SEVERE        | 47 |
| Connection Refused Errors                   | 48 |
| Null Pointer Exception Errors               | 48 |
| SCR 6.1.21 fails to download patches        | 49 |

## Out of Memory Error

Insufficient memory on the SCR Tool host machine might cause the SCR Tool to report that the system is out of memory.

### Problem

The SCR Tool reports the error `OutOfMemoryErrorChange`.

### Cause

If you run multiple batch files simultaneously on a single SCR Tool host machine, the machine might not have sufficient RAM to support each process.

**Solution**

Verify that the SCR Tool host machine has enough memory to run the patch replications, or run fewer concurrent replications. Each patch replication is configured to require between 512 MB of RAM minimum and 2 GB maximum.

**Content Download Network Connection Error**

The connection between the SCR Tool and the Content Download Network (CDN) might disconnect occasionally.

**Problem**

The SCR Tool cannot connect to the CDN.

**Cause**

The SCR Tool host machine cannot connect to the Internet.

**Solution**

1. Verify that the SCR Tool host machine can connect to the Internet.
2. Ping the address of the CDN server, which is contained in the logs.
3. If the ping to the server is not successful, determine whether a host resolution problem exists, or determine if blocks exist in your firewall, then take the appropriate action to resolve the problem.

**Cannot Connect to Red Hat Account**

When account information changes for Red Hat, you must resynchronize the Software Content Repository Tool with the Red Hat repository and update the startup script to use the new account information.

**Problem**

The SCR Tool connection to the Red Hat repository fails.

**Cause**

Red Hat account information changed.

**Solution**

Synchronize the SCR Tool with the Red Hat repository.

1. Select the SCR Tool output folder and delete all of the `SystemId*.xml` files.

For example:

```
cd PatchRepo/Repos/unix
rm SystemId*.xml
```

The path to the `unix` folder is located in the properties file, and is defined using the `folder=value` parameter. For example: `folder=/PatchRepo/Repos`.

2. Log in to your Red Hat network content download site.
3. Locate any systems that were created by the SCR Tool whose names begin with `redhat-nca*`, and

delete them.

4. On the SCR Tool host machine, from the `scr_root/conf` directory, open the properties file and verify that it is updated with the new username and encrypted password.
5. Run the replication process again.

## Session Login to RedHat Fails

An incorrect entry in the RedHat `.properties` file causes the session login from the Software Content Repository (SCR) Tool to fail.

### Problem

When you attempt a patch download from the RedHat vendor site, the following error occurs.

```
SEVERE: Failed to establish login session with RHN
```

### Cause

The `unix` directory is defined in the `folder` property file parameter in your `REDHAT-rt.properties` file.

If all entitlements are exhausted, the SCR Tool reports similar errors and additional log messages.

### Solution

The property file parameter of `folder` defines the root folder to store the SCR Tool output.

1. Open the `REDHAT-rt.properties` file and remove the `unix` directory from the defined `folder` property, and save the file.

The entry in the properties file resembles: `folder=SCR_output_folder`

2. Verify that the user defined in the `REDHAT-rt.properties` file is not a shared user account that is used on multiple managed machines or by many individuals.

The entry in the properties file resembles: `user=string`

3. Verify that the SCR Tool host machine is not using native OS tools to update the operating system.

## Download from Red Hat Fails

If you change or delete source machine information at Red Hat Network, patch download fails until you reset the SCR Tool so that the correct source machine information is synchronized with the Red Hat repository.

### Problem

The log in to Red Hat succeeds, but the patch download fails with an error. For example:

```
FINE: Login Response XML is Server ID = Auth User ID = Auth Server Time =
Auth Expire = Auth = Channel = []
Aug 17, 2011 3:45:19 PM com.lumension.scr.pojo.SCPackage download
FINE: Downloading filegetPackage/mailman-2.1.5.1-34.rhel4.6.i386.rpm
Aug 17, 2011 3:45:19 PM com.lumension.scr.rhn.RHNRPMPFile download
FINE: Downloading RPM file /patchRepo/repos2/RedHat/getPackage/mailman-
2.1.5.1-34.rhel4.6.i386.rpm
Aug 17, 2011 3:45:19 PM com.lumension.scr.client.StandaloneSCRepositoryClient
download
SEVERE: Package Download Exception
com.lumension.scr.exception.SCRException: Primary patch file failed download:
```

```
RHSA-2007:0779-04 getPackage/mailman-2.1.5.1-34.rhel4.6.i386.rpm
 at com.lumension.scr.pojo.SCPackage.download(SCPackage.java:472)
 at com.lumension.scr.client.StandaloneSCRepositoryClient .download
(StandaloneSCRepositoryClient.java:389)
 at com.lumension.scr.client.StandaloneSCRepositoryClient .process
(StandaloneSCRepositoryClient.java:328)
 at com.lumension.scr.client.StandaloneSCRepositoryClient .main
(StandaloneSCRepositoryClient.java:429)
```

### **Cause**

Source machine information was changed or deleted on the RedHat Network (RHN) or RedHat Subscription Manager (RHSM).

### **Solution**

Resynchronize the SCR Tool with the Red Hat repository.

1. Select the SCR Tool output folder and delete all of the `SystemId*.xml` files.

For example:

```
cd PatchRepo/Repos/unix
rm SystemId*.xml
```

The path to the `unix` folder is located in the properties file, and is defined using the `folder=value` parameter. For example, `folder=/PatchRepo/Repos`.

2. Run the replication process manually or allow it to run on schedule.

## HP-UX Service Authentication Fails

The HP-UX service validates authentication through the use of a trusted certificate.

### Problem

The HP-UX Software Assistant performs checks for published security issues, installed patches that have warnings, and missing patches that have critical fixes. The HP-UX Software Assistant checks certificates to ensure a secure connection. When you use the SCR Tool to download recommended patches, if a trusted certificate does not exist when the HP-UX Software Assistant validates the connection, the following error occurs.

```
Failed to authenticate with HpUx Service
com.lumension.scr.exception.UnableToAccessURL:
javax.net.ssl.SSLHandshakeException:
```

### Cause

A trusted certificate does not exist or a change in HP-UX authentication occurred.

### Solution

If you encounter this error with the HP-UX Software Assistant, install a trusted certificate in the key store based on HP's recommendation. See the online HP information about installing intermediate certificates for Software Assistant.

To install intermediate certificates for Software Assistant, see <http://kb.vmware.com/kb/2051577>.

## Download from HP Fails

HP-UX downloads require proprietary authentication.

### Problem

You cannot access or download patch content from the HP Web site using the SCR Tool.

### Cause

A change in HP-UX authentication occurred.

### Solution

An internal VMware Knowledge Base article exists. Contact VMware Technical Support to open a service request, and refer to KB article 2008242.

## Proxy Server Configuration Fails

Failure to configure a proxy server properly for platform-specific patch content downloads with the SCR Tool might generate proxy connection errors.

### Problem

When you use the SCR Tool to download patch content for a specific Linux or UNIX platform, the proxy server configuration fails. The `scr_root/logs/scr-messages-0.log` file displays a No Proxy connection error, and the SCR Tool cannot process the request for the platform.

For example:

```
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
```

```

INFO: Starting Standalone Repository Client
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: Using runtime profile : solariskarl-rt
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: System Configuration: ({keyFile=./vmware.plk, folder=/SCR/download,
platform=SOLARIS, configlog=../logs/Solaris-Config.log,
user=you@yourdomain.com, dependencyCheck=NONE, program=".", thirdparty=true,
channels=sol10, arch=SPARC, downloadPayload=true, index=VMware57.xml,
cacheResponseFolder=/SCR/bin/./cacherequest,
cacheRequestFolder=/SCR/bin/./cacherequest, checkPayload=true})
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: Decrypting Password
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: Creating Repositoryconfig
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging infoexit
INFO: SunSolve Configuration setup
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: Lumension Content Processing begin
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: Processing Architecture SPARC
Mar 12, 2013 6:19:48 AM com.lumension.scr.log.CommonsLogging info
INFO: No Proxy connection
Mar 12, 2013 6:22:57 AM com.lumension.scr.log.CommonsLogging error
SEVERE: Error processing architecture SPARC
Mar 12, 2013 6:22:57 AM com.lumension.scr.log.CommonsLogging error
SEVERE: com.lumension.scr.exception.UnableToProcessContentXMLException:
com.lumension.scr.exception.UnableToAccessURL: java.net.ConnectException:
Connection timed out
Mar 12, 2013 6:22:57 AM com.lumension.scr.log.CommonsLogging info
INFO: Lumension Content Processing end
Mar 12, 2013 6:22:57 AM com.lumension.scr.log.CommonsLogging info
INFO: System Configuration: ({keyFile=./vmware.plk, folder=/SCR/download,
platform=SOLARIS, configlog=../logs/Solaris-Config.log,
user=you@yourdomain.com, dependencyCheck=NONE, program=".", thirdparty=true,
channels=sol10, arch=SPARC, downloadPayload=true, index=VMware57.xml,
cacheResponseFolder=/SCR/bin/./cacherequest,
cacheRequestFolder=/SCR/bin/./cacherequest, checkPayload=true})

```

**Cause**

The proxy server parameters in the platform-specific properties file are not correct.

**Solution**

Review and correct the proxy server parameters in the properties file used to download patch content for the Linux or UNIX platform, including the IP address, port, user ID for authentication, and encrypted password.

**Mismatch in Number of Patches**

The number of patches on the vendor download site exceeds the number of patches verified by the SCR Tool host machine.

**Problem**

A mismatch appears to exist in the number of patches available to the SCR Tool versus the number of patches listed by the vendor.

**Cause**

The SCR Tool host machine verifies the security patches recommended by the vendor. Because not all of the patches on the vendor download site are for security, the patches available to the SCR Tool are a subset of the total number of patches available.

If a patch signature list (.pls) file was downloaded, but the startup script stopped running before the payload finished downloading, a true mismatch can occur.

**Solution**

1. Run the startup script again.
2. If a patch appears to be missing, delete the corresponding .pls file for the missing patch, and download the content again.

**OS Vendor Does Not Accept Credentials**

When you attempt to connect to the Content Download Network, the OS vendor does not accept your login credentials.

**Problem**

The OS vendor does not accept your credentials.

**Cause**

Your credentials might be outdated or the password might have changed.

**Solution**

1. Contact the vendor and verify that your credentials to the vendor's site are valid.
2. Review the content of the `/conf/distribution-rt.properties` file, and verify that the correct user is defined.
3. If the password has changed, update the password in the `/conf/distribution-rt.properties` file.

**OS Vendor Errors**

When you attempt to connect to the Content Download Network, the OS vendor download Web site reports an error.

**Problem**

When you attempt to download patch content, an error occurs on the OS vendor download Web site. For example:

```
Mar 24, 2011 3:33:19 PM sun.net.www.protocol.http.HttpURLConnection
getInputStream

FINE: HYPERLINK "mailto:sun.net.www.MessageHeader@1a4e8a118"
sun.net.www.MessageHeader@1a4e8a118 pairs: {null: HTTP/1.1 401 Authorization
Required}{Date: Thu, 24 Mar 2011 21:35:03 GMT}{Server: Apache}{X-RHN-Fault-Code:
-33}
```

**Cause**

Errors might occur in the following cases.

- You attempted to use the `#channels` parameter in a properties file but you are not entitled to use the command.
- At the time of download, an excessive number of concurrent logins are accessing the OS vendor site.

**Solution**

- If multiple users in your environment are manually connected to the download Web sites, wait until they are finished before you connect again.
- Limit user connections to the OS vendor download Web site during patch replication, and restart the patch replication process.

## Patch Download Errors

When you run the startup script, the source of the problem does not appear when an error occurs.

**Problem**

A failure in the patch download process might occur because of various problems, but the source of the problem is not obvious. When the patch content downloads, a severe error recorded in the logs might not indicate an actual error. For example, if the CDN does not have the requested package, the non-entitled content might display a SEVERE error.

**Cause**

The patch download process failed, and no message appeared to indicate the cause of the problem.

**Solution**

1. On the SCR Tool host machine, access the `scr_root/logs` directory.
2. View the platform specific log file.
3. Check the log file to confirm whether any SEVERE entries are logged.

Various types of errors can occur. For example:

```
Feb 23, 2011 4:42:45 PM com.lumension.scr.pojo.SCPackage download
SEVERE: Payload file URL to download
http://novell.cdn.lumension.com/novell/aix/ppc/IY76827.tar.gz

Mar 29, 2011 12:59:01 PM com.lumension.scr.util.Utils downloadFromURL
```

```
SEVERE: com.lumension.scr.exception.UnableToAccessURL: Unable to access URL
```

4. Use the message results in the log file to resolve the error, then attempt to download the patch content from the entitled OS vendor site again.

## Obsolete Patches Cause the Download to Fail

Solaris patches that are no longer available cause the patch download to fail.

### Problem

Solaris patch downloads fail on patches with names that begin with SUN. These errors resemble the following entries.

- SEVERE: Failed to download payload file
- SEVERE: Payload download  
/tmp/SCR/download/payload/solaris/x86/SUN10RPC20110304.zip failed

### Cause

Solaris patches with names that begin with SUN are obsolete. This content is no longer provided by the vendor.

### Solution

Ignore errors related to these obsolete patches.

## HTTP Errors Are Not Marked as SEVERE

Using the SEVERE error message to troubleshoot HTTP 404/503 errors might cause you to miss the errors.

### Problem

HTTP 404/503 errors might be logged as FINE, and do not contain the phrase SEVERE in the message, which can cause problems when using the SEVERE message to troubleshoot the problem. These error types resemble the following messages:

```
Apr 8, 2011 2:20:52 PM com.lumension.scr.rhn.RHNRegister postXMLRPCRequest
FINE: RHN HTTP Response 404
```

```
Apr 8, 2011 2:20:52 PM com.lumension.scr.rhn.RHNRegister postXMLRPCRequest
FINE: RHN HTTP Response 404
```

```
Apr 11, 2011 2:28:29 PM com.lumension.scr.rhn.RHNManager getSession
FINE: Getting RHN session
```

```
Apr 11, 2011 2:28:29 PM com.lumension.scr.rhn.RHNRegister postXMLRPCRequest
FINE: RHN HTTP Response 503
```

### Cause

These types of errors typically indicate that a problem exists with the connection to the external Red Hat download site.

### Solution

If these HTTP 404/503 response codes occur from the Red Hat download site, attempt to replicate the patch content later.

## Connection Refused Errors

A Java error indicates that the connection from the SCR Tool to the vendor download site was refused.

### Problem

When you interactively run a replication process, or in the cron logs when you use cron, a Connection refused error can occur. This type of error resembles the following message.

```
java.net.ConnectException: Connection refused
at java.net.PlainSocketImpl.socketConnect(Native Method)
at java.net.PlainSocketImpl.doConnect(PlainSocketImpl.java:351)
at java.net.PlainSocketImpl.connectToAddress(PlainSocketImpl.java:213)
at java.net.PlainSocketImpl.connect(PlainSocketImpl.java:200)
at java.net.SocksSocketImpl.connect(SocksSocketImpl.java:366)
at java.net.Socket.connect(Socket.java:529)
at java.net.Socket.connect(Socket.java:478)
at sun.net.NetworkClient.doConnect(NetworkClient.java:163)
at sun.net.www.http.HttpClient.openServer(HttpClient.java:394)
at sun.net.www.http.HttpClient.openServer(HttpClient.java:529)
at sun.net.www.http.HttpClient.<init>(HttpClient.java:233)
at sun.net.www.http.HttpClient.New(HttpClient.java:306)
at sun.net.www.http.HttpClient.New(HttpClient.java:323)
at sun.net.www.protocol.http.HttpURLConnection.getNewHttpClient
(HttpURLConnection.java:970)
at sun.net.www.protocol.http.HttpURLConnection.plainConnect
(HttpURLConnection.java:911)
at sun.net.www.protocol.http.HttpURLConnection.connect
(HttpURLConnection.java:836)
at sun.net.www.protocol.http.HttpURLConnection.getOutputStream
(HttpURLConnection.java:1014)
at com.lumension.scr.rhn.RHNRegister.postXMLRPCRequest(RHNRegister.java:435)
at com.lumension.scr.rhn.RHNRegister.loginToRHN(RHNRegister.java:526)
at com.lumension.scr.rhn.RHNManager.getSession(RHNManager.java:82)
at com.lumension.scr.pojo.SCPackage.download(SCPackage.java:439)
at com.lumension.scr.client.StandaloneSCRepositoryClient.download
(StandaloneSCRepositoryClient.java:389)
at com.lumension.scr.client.StandaloneSCRepositoryClient.process
(StandaloneSCRepositoryClient.java:328)
at com.lumension.scr.client.StandaloneSCRepositoryClient.main
(StandaloneSCRepositoryClient.java:429)
```

### Cause

An undetermined number of reasons can cause this error.

### Solution

You can typically ignore these errors. The script continues to run and replicate patch data. To verify that the script continues to run, open the individual `<platform>-rt.properties` file and view the content for logged error information.

## Null Pointer Exception Errors

An error occurs while the SCR Tool processes the content download request.

**Problem**

When you run a replication process interactively, or in the `cron` logs when you use `cron`, a null pointer error can occur. This type of error resembles the following message.

```
Apr 8, 2011 8:51:13 PM com.lumension.scr.client.StandaloneSCRepositoryClient
process
SEVERE: Error Processing Content Download Request.
java.lang.NullPointerException
at com.lumension.scr.pojo.SCPackage.download(SCPackage.java:416)
at com.lumension.scr.client.StandaloneSCRepositoryClient.download
(StandaloneSCRepositoryClient.java:389)
at com.lumension.scr.client.StandaloneSCRepositoryClient.process
(StandaloneSCRepositoryClient.java:328)
at com.lumension.scr.client.StandaloneSCRepositoryClient.main
(StandaloneSCRepositoryClient.java:429)
```

**Cause**

An undetermined number of reasons can cause this error.

**Solution**

Restart the replication process to continue downloading the patch content, and use `cron` to start the script again the following day and resume replication. If persistent failures continue, log a ticket with VMware Technical Support.

**SCR 6.1.21 fails to download patches**

SCR6.1.21 fails to download patches if `#channels=` is provided in properties file.

**Problem**

You cannot download patches using SCR 6.1.21 if `#channels=` is provided in properties file.

**Cause**

A suitable value is not provided for the `#channels=` parameter

**Solution**

Specify all the values for the channel parameters in the respective platforms.



# Index

## A

accessing external sites **11**  
agent machines **9**

## C

certificates for HP-UX **11, 43**  
checkPayload option **24**  
configure  
    SCR Tool **17**  
configuring host machine **19**  
connecting to machines **28**  
Content Download Network **33**  
custom logging **28**

## D

directory structure **19**  
downloads  
    delta **33**  
    HP-UX error **43**  
    Java Cryptography Extension **14**  
    Java Runtime Environment **14**  
    patch content **33**  
    patch errors **46**  
    Red Hat patch error **41**  
    schedule **34**  
    SCR patch errors **49**

## E

errors  
    CDN **40**  
    connection refused **48**  
    HP-UX download **43**  
    HP service authentication **43**  
    HTTP connection **47**  
    insufficient memory **39**  
    null pointer **49**  
    obsolete patches **47**  
    OS vendor **45**  
    patch download **46**  
    patch mismatch **45**  
    proxy connection **43**  
    Red Hat account **40**  
    Red Hat download **41**  
    Red Hat login session **41**  
    SCR patch download **49**  
    user credentials **45**

external site access **11**

## H

host machine  
    configuration **19**  
    prerequisites **10**  
    supported **10**  
HP service authentication **11, 43**

## I

installing **13**  
    SCR Tool **13**  
    VCM agent **9**

## J

Java  
    client software application **7**  
    Cryptography Extension **14**  
    Runtime Environment **14**  
JCE on patching repository **17**  
JRE on patching repository **17**

## L

Linux and UNIX replication scripts **21**  
logging levels **28**  
login session failure to Red Hat **41**

## M

Mac OS X payload folders **20**  
machine connection **28**  
maintaining the repository **35**  
managed machines **9**

## O

OS vendor  
    file types **7**  
    patch content **7**  
output file names **28**

## P

parameters for replication scripts **22**  
password encryptor tool **21**  
patches

    content downloads **33**  
    content growth **11**  
    signature files **19, 33**  
    UNIX/Linux machines **7**

patching

    JCE on patching repository **17**  
    JRE on patching repository **17**  
    runtime properties files **17**

payload **19**

permissions **20**  
platforms supported **10**  
prerequisites **9**  
properties files **17**

## R

replication scripts **20**  
repository **7**

    maintenance **35**  
    permissions **20**

root directory **19**

running as guest **10**

runtime properties files for patching **17**

## S

schedule for downloads **34**

- SCR Tool
  - configuration **17**
- scripts
  - for replication **20**
  - parameters for replication **22**
- Software Content Repository (SCR) Tool **17**
- storage prerequisites **10**
- substitution variables **30**
- supported host machine **10**
- supported platforms **10**
- T**
- troubleshooting the SCR Tool **39**
- trusted certificate for HP-UX **43**
- U**
- user credentials **11**
- V**
- VCM Patching **7**