

vCenter Single Sign-On Programming Guide

VMware vSphere 8.0
vCenter Server 8.0
VMware ESXi 8.0

You can find the most up-to-date technical documentation on the VMware by Broadcom website at:

<https://docs.vmware.com/>

VMware by Broadcom

3401 Hillview Ave.
Palo Alto, CA 94304
www.vmware.com

Copyright © 2012-2022 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to <https://www.broadcom.com>. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies. [Copyright and trademark information](#).

Contents

About This Book	5
1 Single Sign-On in the vSphere Environment	7
vCenter Single Sign-On Overview	7
vCenter Single Sign-On Client API	10
Acquiring a SAML Token from a vCenter Single Sign-On Server	10
vCenter Single Sign-On Security Policies	11
Connecting to a vCenter Single Sign-On Server	13
vCenter Single Sign-On Token Delegation	13
vCenter Single Sign-On Token Lifetime - Clock Tolerance	13
vCenter Single Sign-On Challenge (SSPI)	14
vCenter Single Sign-On SOAP Message Structure	15
vCenter Single Sign-On SDK	15
vCenter Single Sign-On SDK Examples	16
2 vCenter Single Sign-On API Reference	18
vCenter Single Sign-On Client API Methods	18
Issue	18
Renew	19
Validate	20
Challenge	20
vCenter Single Sign-On API Data Structures	21
RequestSecurityTokenType	21
RequestSecurityTokenResponseCollectionType	23
RequestSecurityTokenResponseType	23
LifetimeType	24
RenewingType	25
KeyTypeOpenEnum	25
UseKeyType	25
ParticipantsType	26
ParticipantType	26
EndpointReference	26
BinaryExchangeType	26
AdviceType	27
AttributeType	27
3 vCenter Single Sign-On Client Example (JAX-WS)	28
vCenter Single Sign-On Token Request Overview	28

Using Handler Methods for SOAP Headers in Java 29

Sending a Request for a Security Token in Java 31

4 LoginByToken Example (JAX-WS) 34

vCenter Server Single Sign-On Session 34

HTTP and SOAP Header Handlers in Java 35

LoginByToken Sample Code in Java 36

Steps to Connect with a vSphere Server 37

Import the Necessary Java Packages for LoginByToken 37

Get the VimPort for LoginByToken in Java 37

Retrieve the Service Content in Java 38

Invoke the `loginByToken` method in Java 38

Extract the Session Cookie in Java 39

Inject the Session Cookie Back Into the Request in Java 39

Additional Information 40

About This Book

vCenter Single Sign-On Programming Guide describes how to use the VMware® vCenter Single Sign-On API.

VMware provides different APIs and SDKs for different applications and goals. The vCenter Single Sign-On SDK supports the development of vCenter clients that use SAML token authentication for access to vSphere environments.

To view the current version of this book as well as all VMware API and SDK documentation, go to http://www.vmware.com/support/pubs/sdk_pubs.html.

Revision History

This book is revised with each release of the product or when necessary. A revised version can contain minor or major changes. The Revision History table summarizes the significant changes in each version of this book.

Table 1-1. Revision History

Revision Date	Description
11 OCT 2022	vSphere 8.0 release. ■ NET content removed.
06 OCT 2020	Update for the vSphere 7.0 Update 1 release.
02 APR 2020	Update for the vSphere 7.0 release.
17Apr2018	Updates for the vSphere 6.7 release.
15Nov2016	vSphere 6.5 release; vCenter Single Sign-On V2.0. Updated information about session creation sequence.
12Mar2015	vSphere 6.0 release; vCenter Single Sign-On V2.0. Updated Chapter 4 LoginByToken Example (JAX-WS) to reflect the change in session logic. Updated the STS Service specification in the SSO server URL.
19Sep2013	vSphere 5.5 release; vCenter Single Sign-On V2.0. Added documentation for C# (.NET) samples.
08Nov2012	vCenter Single Sign-On SDK V1.0 documentation update – changed SOAP envelope description to identify SSL/TLS (Transport Layer Security) correctly.
10Sep2012	vCenter Single Sign-On SDK V1.0 documentation.

Intended Audience

This book is intended for anyone who needs to develop applications using the vCenter Single Sign-On SDK. An understanding of Web Services technology and some programming background in one of the stub languages (Java or C#) is required.

VMware Technical Publications Glossary

VMware Technical Publications provides a glossary of terms that might be unfamiliar to you. For definitions of terms as they are used in VMware technical documentation go to <http://www.vmware.com/support/pubs>.

Document Feedback

VMware welcomes your suggestions for improving our documentation. Send your feedback to docfeedback@vmware.com.

Single Sign-On in the vSphere Environment

1

A vCenter Single Sign-On client connects to the vCenter Single Sign-On server to obtain a security token that contains authentication claims required for operations in the vSphere environment. The vCenter Single Sign-On client API supports operations to acquire, renew, and validate tokens.

Read the following topics next:

- [vCenter Single Sign-On Overview](#)
- [vCenter Single Sign-On Client API](#)
- [Acquiring a SAML Token from a vCenter Single Sign-On Server](#)
- [vCenter Single Sign-On SOAP Message Structure](#)
- [vCenter Single Sign-On SDK](#)

vCenter Single Sign-On Overview

To support the requirements for secure software environments, software components require authorization to perform operations on behalf of a user. In a single sign-on environment, a user provides credentials once, and components in the environment perform operations based on the original authentication. vCenter Single Sign-On authentication can use the following identity store technologies:

- Windows Active Directory
- OpenLDAP (Lightweight Directory Access Protocol)
- Local user accounts (vCenter Single Sign-On server resident on the vCenter server machine)
- vCenter Single Sign-On user accounts

For information about configuring identity store support, see *vSphere Installation and Setup* and *vSphere Security* in the VMware Documentation Center.

In the context of single sign-on, the vSphere environment is a collection of services and solutions, each of which potentially requires authentication of clients that use the service or solution. Examples of solutions that might support single sign-on include vShield, SRM (Site Recovery Manager), and vCO (vCenter Orchestrator). Because a service can use another service, single sign-on provides a convenient mechanism to broker authentication during a sequence of vSphere operations.


A vCenter Single Sign-On client connects to the vCenter Single Sign-On server to obtain a token that represents the client. The vCenter Single Sign-On server provides a Security Token Service (STS). A token uses the Security Assertion Markup Language (SAML), which is an XML encoding of authentication data. It contains a collection of statements or claims that support client authentication. Examples of token claims include name, key, and group.

vCenter Single Sign-On supports two types of tokens.

- Holder-of-key tokens provide authentication based on security artifacts embedded in the token. Holder-of-key tokens can be used for delegation. A client can obtain a holder-of-key token and delegate that token for use by another entity. The token contains the claims to identify the originator and the delegate. In the vSphere environment, a vCenter server obtains delegated tokens on a user's behalf and uses those tokens to perform operations.
- Bearer tokens provide authentication based only on possession of the token. Bearer tokens are intended for short-term, single-operation use. A bearer token does not verify the identity of the user (or entity) sending the request. It is possible to use bearer tokens in the vSphere environment, however there are potential limitations:
 - The vCenter Single Sign-On server may impose limitations on the token lifetime, which would require you to acquire new tokens frequently.
 - Future versions of vSphere might require the use of holder-of-key tokens.

The following figure shows a vCenter client that uses a SAML token to establish a session with a vCenter server.

Figure 1-1. Single Sign-On in the vSphere Environment – vCenter Server LoginByToken

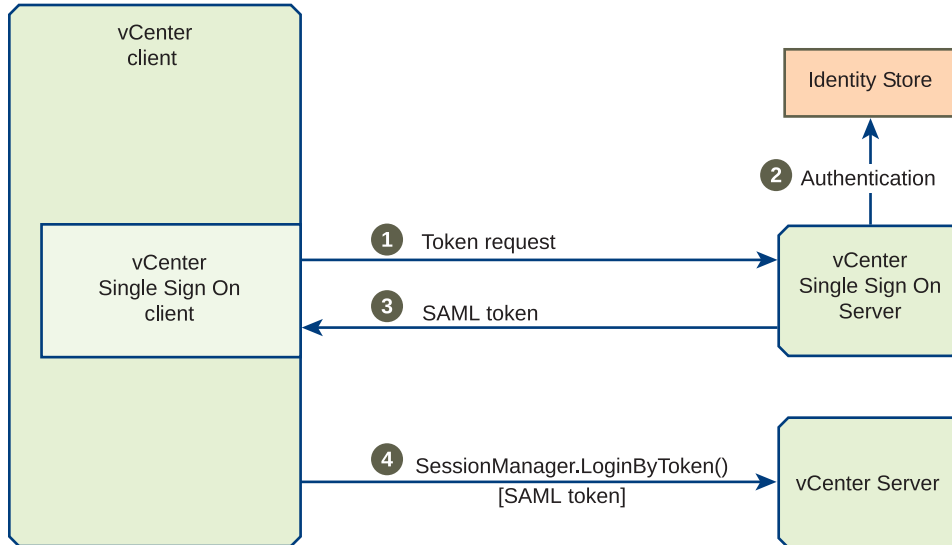

The vCenter client also operates as a vCenter Single Sign-On client. The vCenter Single Sign-On client component handles communication with the vCenter Single Sign-On server.

- 1 The vCenter Single Sign-On client sends a token request to the vCenter Single Sign-On server. The request contains information that identifies the principal. The principal has an identity in the identity store. The principal may be a user or it may be a software component. In this scenario, the principal is the user that controls the vCenter client.
- 2 The vCenter Single Sign-On server uses the identity store to authenticate the principal.
- 3 The vCenter Single Sign-On server sends a response to the token request. If authentication is successful, the response includes a SAML token.
- 4 The vCenter client connects to the vCenter server and calls the `SessionManager.LoginByToken()` method. The login request contains the SAML token.

The previous figure shows the vCenter server, vCenter Single Sign-On server, and identity store as components running on separate machines. You can use different vCenter Single Sign-On configurations.

- A vCenter Single Sign-On server can operate as an independent component running on its own machine. The vCenter Single Sign-On server can use a remote identity store or it can manage user accounts in its own internal identity store.
- A vCenter Single Sign-On server can operate as an embedded component running on the vCenter server machine. In this configuration, the vCenter Single Sign-On server can use a remote identity store, its own internal identity store, or it can access user accounts on the vCenter server machine.

For information about installing and configuring the vCenter Single Sign-On server, see *vSphere Installation and Setup* and *vSphere Security* in the VMware Documentation Center.

vCenter Single Sign-On Client API

The vCenter Single Sign-On client API is described in the WSDL (Web Service Definition Language) file that is included in the vCenter Single Sign-On SDK. This API defines a set of request operations that correspond to the WS-Trust 1.4 bindings. The set of operations includes `Issue`, `Renew`, `Validate`, and `Challenge` requests.

- `Issue` – Obtains a token from a vCenter Single Sign-On server.
- `Renew` – Renews an existing token.
- `Validate` – Validates an existing token.
- `Challenge` – Part of a negotiation with a vCenter Single Sign-On server to obtain a token.

The vCenter Single Sign-On SDK includes Java bindings for the vCenter Single Sign-On WSDL. The SDK also contains sample code that demonstrates client-side support for the WS-SecurityPolicy standard. Security policies specify the elements that provide SOAP message security. To secure SOAP messages, a client inserts digital signatures, certificates, and SAML tokens into the SOAP headers for vCenter Single Sign-On requests.

The Java sample includes a JAX-WS implementation of SOAP header methods that support the vCenter Single Sign-On security policies.


See [vCenter Single Sign-On Security Policies](#) and [vCenter Single Sign-On SDK](#).

Acquiring a SAML Token from a vCenter Single Sign-On Server

To obtain a security token from a vCenter Single Sign-On server, the vCenter Single Sign-On client calls the `Issue` method, which sends a SOAP message that contains a token request and authentication data. This section describes a token request that uses a certificate to obtain a holder-of-key token. When the client creates the token request, it also inserts timestamp, signature, and certificate data into the SOAP security header.

The following figure represents the content of an `Issue` request and the response containing a SAML token.

Figure 1-2. Issue - vCenter Single Sign-On Token Request and Response

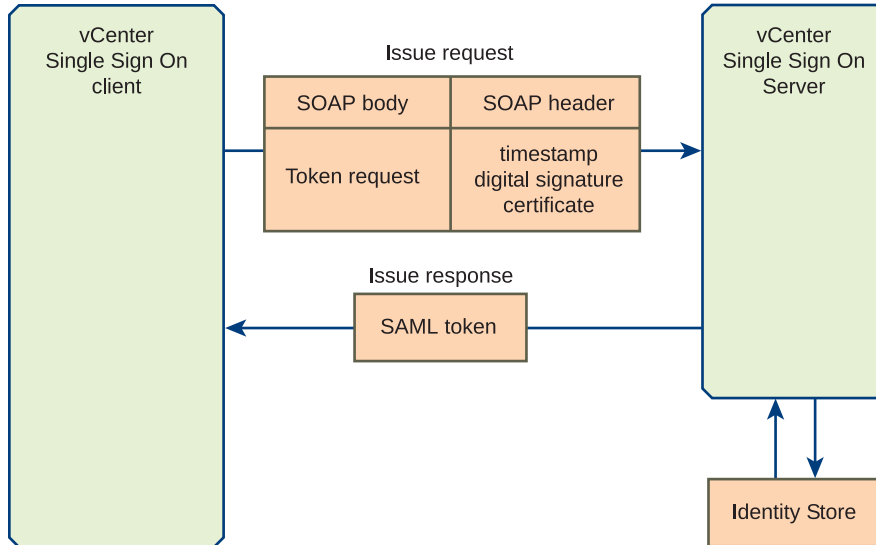

The vCenter Single Sign-On SDK provides Java packages that support SOAP header manipulation.

When the vCenter Single Sign-On server receives the issue request, it performs the following operations to generate a token:

- Uses the timestamp to validate the request.
- Validates the certificate.
- Uses the certificate to validate the digital signature.
- Uses the certificate subject to authenticate the request. Authentication is obtained from the identity store that is registered with the vCenter Single Sign-On server.
- Generates a token that specifies the principal – the vCenter Single Sign-On client – as the token subject.

vCenter Single Sign-On Security Policies

Web service security policies define the requirements for secure communication between a Web service and a client. vCenter Single Sign-On security policies are based on the WS-Policy framework and WS-SecurityPolicy specifications. A policy identifies specific elements for token requests. Based on the policy requirements, a vCenter Single Sign-On client will insert data into the SOAP security header for the token request.

vCenter Single Sign-On defines security policies for end user access, solution access, and for token exchange. The policies stipulate the following elements:

- Security certificates (x509V3, x509PKIPathV1, x509PKCS7, or WssSamIV20Token11)
- Message timestamps
- Security binding (transport)

- Encryption algorithm (Basic256Sha256)

vCenter Single Sign-On security policies specify that the body of the SOAP message for a holder-of-key token must be signed. Bearer tokens require only the username and timestamp tokens.

Note The vCenter Single Sign-On server issues SAML tokens to represent client authentication. The standards documentation also uses the term “token” to refer to claims and certificate data that is inserted into SOAP security headers.

The following table shows the vCenter Single Sign-On policies and identifies the requirements for each policy. The vCenter Single Sign-On WSDL defines these policies for use with the vCenter Single Sign-On methods.

Table 1-1. vCenter Single Sign-On Policies

Policy	Description
STSSecPolicy	<p>Defines the transport policy and algorithm suite for all communication with the vCenter Single Sign-On server:</p> <ul style="list-style-type: none"> ■ Certificate-based server-side SSL authentication. ■ HTTPS transport binding using NIST (National Institute of Standards and Technology) Basic256Sha256 encryption algorithm. The HTTPS token is used to generate the message signature. ■ Request security header must contain a timestamp.
IssueRequestPolicy	<p>Defines the security policy for Issue token requests. IssueRequestPolicy specifies either username token (signed), username token (plaintext password), X509 certificate, or holder-of-key token authentication. You specify username/password or X509 certificate credentials to obtain a vCenter Single Sign-On token. If you obtain a holder-of-key token, you can use that token for subsequent Issue requests.</p> <p>Username token (signed) authentication:</p> <ul style="list-style-type: none"> ■ X509 endorsing supporting token (WssX509V3Token11, WssX509PkiPathV1Token11, or WssX509Pkcs7Token10) ■ WssUsernameToken11 signed supporting token <p>Username token (plaintext password) authentication:</p> <ul style="list-style-type: none"> ■ WssUsernameToken11 signed supporting token <p>X509 certificate authentication:</p> <ul style="list-style-type: none"> ■ X509 endorsing supporting token (WssX509V3Token11, WssX509PkiPathV1Token11, or WssX509Pkcs7Token10) <p>Holder-of-Key token authentication:</p> <ul style="list-style-type: none"> ■ WssSamlV20Token11 assertion referenced by a KeyIdentifier ■ Token must be used to sign the SOAP message body.
RenewRequestPolicy	<p>Defines the security policy for Renew token requests. The request must contain one of the following endorsing supporting tokens. The SOAP message body must be included in the signature generated with the token.</p> <ul style="list-style-type: none"> ■ WssX509V3Token11 ■ WssX509PkiPathV1Token11 ■ WssX509Pkcs7Token10

vCenter Single Sign-On SDK Support for vCenter Single Sign-On Security Policies

The vCenter Single Sign-On SDK provides Java utilities that support the vCenter Single Sign-On security policies. Your vCenter Single Sign-On client can use these utilities to create digital signatures and supporting tokens, and insert them into SOAP headers as required by the policies. The SOAP header utilities are defined in files that are located in the samples directory:

```
SDK\sso\java\JAXWS\samples\com\vmware\sso\client\soaphandlers
```

See [Using Handler Methods for SOAP Headers in Java](#).

Connecting to a vCenter Single Sign-On Server

When a vCenter Single Sign-On client connects to a vCenter Single Sign-On server, it must specify the server URL as the endpoint for the token request message. The endpoint specification uses the following format:

```
https://hostname|IPAddress/STS/STSService
```

The path suffix (`STS/STSService`) is required. See [Sending a Request for a Security Token in Java](#) for an example of setting the endpoint for a token request.

vCenter Single Sign-On Token Delegation

Holder-of-key tokens can be delegated to services in the vSphere environment. A service that uses a delegated token performs the service on behalf of the principle that provided the token. A token request specifies a `DelegateTo` identity. The `DelegateTo` value can either be a solution token or a reference to a solution token.

Components in the vSphere environment can use delegated tokens. vSphere clients that use the `LoginByToken` method to connect to a vCenter server do not use delegated tokens. The vCenter server will use a vSphere client's token to obtain a delegated token. The vCenter server will use the delegated token to perform operations on behalf of the user after the user's vCenter session has ended. For example, a user may schedule operations to occur over an extended period of time. The vCenter server will use a delegated token to support these operations.

vCenter Single Sign-On Token Lifetime - Clock Tolerance

A SAML token contains information about the lifetime of a token. A SAML token uses the `NotBefore` and `NotOnOrAfter` attributes of the SAML `Conditions` element to define the token lifetime.

```
<saml2:Conditions NotBefore="2011-10-04T21:39:17.731Z"
NotOnOrAfter="2011-10-04T21:39:47.731Z">
```

During a token's lifetime, the vCenter Single Sign-On server considers any request containing that token to be valid and the server will perform renewal and validation operations on the token. The lifetime of a token is affected by a clock tolerance value that the vCenter Single Sign-On server applies to token requests. The clock tolerance value accounts for differences between time values generated by different systems in the vSphere environment. The clock tolerance is 10 minutes.

vCenter Single Sign-On Challenge (SSPI)

The vCenter Single Sign-On server supports the use of SSPI (Security Support Provider Interface) for client authentication. SSPI authentication requires that both the client and server use security providers to perform authentication.

At the beginning of a vCenter Single Sign-On server session, the vCenter Single Sign-On client and vCenter Single Sign-On server exchange data. Each participant will use its security provider to authenticate the data it receives. The authentication exchange continues until both security providers authenticate the data.

The vCenter Single Sign-On client API provides a `challenge` request for client participation in SSPI authentication. The following sequence describes the challenge protocol.

- 1 vCenter Single Sign-On client sends an `issue` request to the vCenter Single Sign-On server. The request contains the client credentials.
- 2 vCenter Single Sign-On server uses its security provider to authenticate the client. The server returns a `RequestSecurityTokenResponseType` object in response to the `issue` request. The response contains a challenge.
- 3 vCenter Single Sign-On client uses its security provider to authenticate the vCenter Single Sign-On server response. To continue the authentication exchange, the client sends a `challenge` request to the vCenter Single Sign-On server. The request contains the resolution to the server's challenge and it can also contain a challenge from the vCenter Single Sign-On client.
- 4 vCenter Single Sign-On server uses its security provider to authenticate the client's response. If there are still problems, the server can continue the authentication exchange by returning a response with an embedded challenge. If authentication is successful, the vCenter Single Sign-On server returns a SAML token to complete the original `issue` request.

To exchange challenge data, the vCenter single Sign-On client and vCenter Single Sign-On server use the following elements defined for both `RequestSecurityTokenType` and `RequestSecurityTokenResponseType` objects.

- Context attribute
- BinaryExchange element

vCenter Single Sign-On SOAP Message Structure

The requirements listed in the following table apply to the SOAP message structure in vCenter Single Sign-On message exchange.

Table 1-2. vCenter Single Sign-On SOAP Message Structure

Element	Message Requirements
SOAP envelope	<p>All <wst:RequestSecurityToken>, <wst:RequestSecurityTokenResponse>, and <wst:RequestSecurityTokenResponseCollection> elements must be sent as the single direct child of the body of a SOAP 1.1 <S11:Envelope> element.</p> <p>Use HTTP POST to send all vCenter Single Sign-On SOAP messages over an SSL/TLS-protected channel. Set the SOAPAction HTTP header field to the appropriate message binding.</p> <p>The <wsse:Security> header in a vCenter Single Sign-On request must contain a <wsu:Timestamp> element.</p>
SOAP message signature	<p>If a signature is applied to a request then it must include:</p> <ul style="list-style-type: none"> ■ Either the <S11:Body>, or the WS-Trust element as a direct child of the <S11:Body> ■ The <wsu:Timestamp>, if present, in the <S11:Header>. <p>Exclusive canonicalization without comments (xml-exc-c14n) must be used prior to signature generation.</p> <p>The signature certificate must either be carried either within a <wsse:BinarySecurityToken> or a <saml:Assertion> within <wsse:Security> header of the <S11:Header>.</p> <p>The signature must contain a <wsse:SecurityTokenReference> that uses an internal direct reference to the <wsse:BinarySecurityToken>.</p>

vCenter Single Sign-On SDK

The vCenter Single Sign-On SDK is distributed as part of the VMware vSphere Management SDK. When you extract the contents of the distribution kit, the vCenter Single Sign-On SDK is located in the `ssoclient` sub-directory:

```
VMware-vSphere-SDK-build-num
  eam
  sms-sdk
  ssoclient
    docs
    dotnet
      cs
        samples
    java
      JAXWS
        lib
        samples
    wsd1
    vsphere-ws
```

The following table shows the locations of the contents of the vCenter Single Sign-On SDK.

Table 1-3. vCenter Single Sign-On SDK Contents

vCenter Single Sign-On SDK Component	Location
C# vCenter Single Sign-On samples	ssoclient/dotnet/cs/samples
JAX-WS vCenter Single Sign-On client binding	ssoclient/java/JAXWS/lib
Java samples	ssoclient/java/JAXWS/samples/com/vmware/sso/client/samples
VMware SOAP header utilities	ssoclient/java/JAXWS/samples/com/vmware/sso/client/soaphandlers
General utilities for samples	ssoclient/java/JAXWS/samples/com/vmware/sso/client/utills
WS-Security utilities for samples	ssoclient/java/JAXWS/samples/com/vmware/sso/client/wssecurity
vCenter LoginByToken sample	ssoclient/java/JAXWS/samples/com/vmware/vsphere/samples
VMware SOAP header utilities for LoginByToken example	ssoclient/java/JAXWS/samples/com/vmware/vsphere/soaphandlers
Documentation for example code	ssoclient/docs/java/JAXWS/samples/javadoc/index.html
WSDL files	ssoclient/wsdl

vCenter Single Sign-On SDK Examples

The vCenter Single Sign-On SDK contains Java examples that show how to acquire, validate, and renew tokens. This manual describes examples that show how to obtain a holder-of-key token from a vCenter Single Sign-On server and how to use that token to login to a vCenter server.

This manual describes two of the Java examples provided by the VMware SSO Client SDK:

- [Chapter 3 vCenter Single Sign-On Client Example \(JAX-WS\)](#). This example shows how to obtain a holder-of-key token from the vCenter Single Sign-On server.
- [Chapter 4 LoginByToken Example \(JAX-WS\)](#). This example shows how to use the token to login to vCenter server.

The following table lists the sample files in the SDK:

Table 1-4. VMware SSO Client SDK Sample Files – Java

Location	Examples	Description
SDK/ssoclient/java/JAXWS/samples/com/vmware/sso/client/samples/		
	AcquireBearerTokenByUserCredentialSample.java	Demonstrates how to use username and password credentials to obtain a bearer token.
	AcquireHoKTokenByHoKTokenSample.java	Demonstrates how to exchange one holder-of-key token for another.

Table 1-4. VMware SSO Client SDK Sample Files – Java (continued)

Location	Examples	Description
	AcquireHoKTokenBySolutionCertificateSample.java	Demonstrates how a solution uses its private key and certificate to acquire a holder-of-key token.
	AcquireHoKTokenByUserCredentialSample.java	Demonstrates how to use username, password, and certificate credentials to obtain a holder-of-key token. See Chapter 3 vCenter Single Sign-On Client Example (JAX-WS) .
	RenewTokenSample.java	Demonstrates how to renew a holder-of-key token.
	ValidateTokenSample.java	Demonstrates how to validate a token.
SDK/ssoclient/java/JAXWS/samples/com/vmware/sso/client/soaphandlers/		
	HeaderHandlerResolver.java	Provides methods to manage the set of header handlers.
	SamlTokenExtractionHandler.java	Extracts a SAML token from the vCenter Single Sign-On server response.
	SamlTokenHandler.java	Adds a SAML token to a SOAP security header.
	SSOHeaderhandler.java	Base class for header handler classes.
	TimeStampHandler.java	Adds a timestamp element to a SOAP security header.
	UserCredentialHandler.java	Adds a username token to a SOAP security header.
	WsSecuritySignatureAssertionHandler.java	Uses SAML token assertion ID, private key, and certificate to sign a SOAP message. For use when using an existing token to acquire a new token.
	WsSecurityUserCertificateSignatureHandler.java	Uses a private key and certificate to sign a SOAP message.
SDK/ssoclient/java/JAXWS/samples/com/vmware/vsphere/samples/		
	LoginByTokenSample.java	Demonstrates how to use a SAML token to login to a vCenter server. See Chapter 4 LoginByToken Example (JAX-WS) .
SDK/ssoclient/java/JAXWS/samples/com/vmware/vsphere/soaphandlers/		
	HeaderCookieExtractionHandler.java	Extracts the vCenter HTTP session cookie from the response to a connection request.
	HeaderCookieHandler.java	Inserts an HTTP cookie into a request.

vCenter Single Sign-On API Reference

2

This chapter contains descriptions of the methods and data structures defined for the vCenter Single Sign-On client API.

Read the following topics next:

- [vCenter Single Sign-On Client API Methods](#)
- [vCenter Single Sign-On API Data Structures](#)

vCenter Single Sign-On Client API Methods

The vCenter Single Sign-On client API consists of the following methods:

- Issue
- Renew
- Validate
- Challenge

Issue

Sends a security token request to a vCenter Single Sign-On server.

Method Signature

```
Issue (requestSecurityToken : RequestSecurityTokenType)  
    returns RequestSecurityTokenResponseCollectionType
```

Parameter

`requestSecurityToken` : see [RequestSecurityTokenType](#) – The following `RequestSecurityTokenType` elements are required for an Issue request; the remaining elements are optional.

- `RequestType` – Must be the URL “<http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue>”.
- `Sig` attribute (`UseKey` element) – Specifies a security token that contains an existing certificate key for subject confirmation.

- `Context` attribute – Required if you include a `BinaryExchangeType` element for SSPI authentication.

Return Value

`RequestSecurityTokenResponseCollectionType` – Set of `RequestSecurityTokenResponseType`. A response contains a SAML token or a challenge requiring additional authentication data.

Comments

Sends a token request to a vCenter Single Sign-On server. The request message must contain security artifacts as determined by the vCenter Single Sign-On policy used for the request. The vCenter Single Sign-On server will authenticate the user credentials in the request. For information about configuring user directory support for authentication, see *vSphere Installation and Setup* and *vSphere Security* in the VMware Documentation Center. If the vCenter Single Sign-On server requires information during SSPI authentication, it will negotiate with the vCenter Single Sign-On client by embedding a challenge in the response.

Renew

Renews an existing SAML token.

Method Signature

```
Renew (token : RequestSecurityTokenType) returns RequestSecurityTokenResponseType
```

Parameter

`token : RequestSecurityTokenType` – Security token request containing a SAML token previously obtained from a vCenter Single Sign-On server. The token must be valid (not expired). The following `RequestSecurityTokenType` elements are required for a `Renew` request; the remaining elements are optional.

- `RequestType` – Must be the URL “`http://docs.oasis-open.org/ws-sx/ws-trust/200512/Renew`”.
- `RenewTarget` – Identifies the SAML token to be renewed.
- `Sig` attribute (`UseKey` element) – Specifies a security token that contains an existing certificate key for subject confirmation.
- `Context` attribute – Required if you include a `BinaryExchangeType` element for SSPI authentication.

Return Value

`RequestSecurityTokenResponseType` – Response containing the renewed token.

Comments

You can renew holder-of-key tokens only. In addition to the the required token request elements shown above, the `Renew` request SOAP header must contain security elements according to the security policy.

Validate

Validates an existing SAML token.

Method Signature

```
Validate (token : RequestSecurityTokenType) returns RequestSecurityTokenResponseType
```

Parameter

`token : RequestSecurityTokenType` – Security token request containing a SAML token previously obtained from a vCenter Single Sign-On server. The following `RequestSecurityTokenType` elements are required for a `Validate` request; the remaining elements are optional.

- `RequestType` – Must specify the URL “`http://docs.oasis-open.org/ws-sx/ws-trust/200512/Validate`”.
- `ValidateTarget` – Identifies the SAML token to be validated.
- `Sig` attribute (`UseKey` element) – Specifies a security token that contains an existing certificate key.
- `Context` attribute – Required if you include a `BinaryExchangeType` element for SSPI authentication.

Return Value

`RequestSecurityTokenResponseType` – Response containing the validated token.

Comments

Performs validation of the token and its subject. It includes but is not limited to validations of the following elements:

- Token signature
- Token lifetime
- Token subject
- Token delegates
- Group(s) to which the subject belongs

Challenge

Extends a token request to verify elements in the request.

Method Signature

```
Challenge (response : RequestSecurityTokenType) returns
RequestSecurityTokenType
```

Parameter

response : RequestSecurityTokenType – Contains SSPI data in the BinaryExchange element.

Return Value

RequestSecurityTokenType – Response containing the validated token.

Comments

Part of a negotiation with a vCenter Single Sign-On server to resolve issues related to SSPI authentication.

vCenter Single Sign-On API Data Structures

Use the following objects for the vCenter Single Sign-On methods.

RequestSecurityTokenType	ParticipantsType
RequestSecurityTokenResponseCollectionType	ParticipantType
RequestSecurityTokenResponseType	EndpointReference
LifetimeType	BinaryExchangeType
RenewingType	AdviceType
KeyTypeOpenEnum	AttributeType
UseKeyType	

RequestSecurityTokenType

Defines a set of token characteristics requested by the vCenter Single Sign-On client. The vCenter Single Sign-On client specifies this data object in a call to the `Issue`, `Renew`, and `Validate` methods. The vCenter Single Sign-On server may satisfy a request for a particular characteristic or it may use a different value in the issued token. The response to the token request contains the actual token values. See [RequestSecurityTokenResponseType](#).

The vCenter Single Sign-On API supports a subset of the `RequestSecurityTokenType` elements defined in the WS-Trust specification. The following table shows the supported elements and attributes. An item in the table is defined as an element in the WSDL unless explicitly identified as an attribute.

Table 2-1. RequestSecurityTokenType Elements (vCenter Single Sign-On)

Element	Datatype	Description
Context	string	<code>RequestSecurityToken</code> attribute specifying a URI (Uniform Resource Identifier) that identifies the original request. If you include this in a request, the vCenter Single Sign-On server will include the context identifier in the response. This attribute is required when the request includes a <code>BinaryExchange</code> property.
TokenType	string	Identifies the requested token type, specified as a URI (Uniform Resource Identifier). The following list shows the valid token types: <ul style="list-style-type: none"> ■ <code>urn:oasis:names:tc:SAML:2.0:assertion</code> – for issue and renew requests. ■ <code>http://docs.oasis-open.org/ws-sx/ws-trust/200512/RSTR/Status</code> – for validation requests.
RequestType	string	Identifies the request type, specified as a URI. The <code>RequestType</code> property is required. <p>The following list shows the valid request types:</p> <ul style="list-style-type: none"> ■ <code>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue</code> ■ <code>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Renew</code> ■ <code>http://docs.oasis-open.org/ws-sx/ws-trust/200512/Validate</code>
Lifetime	<code>LifetimeType</code>	Time period during which a token is valid. The vCenter Single Sign-On server can ignore the requested lifetime and assign a different lifetime to the token. The lifetime specifies creation and expiration values. This property is optional – used with <code>Issue</code> and <code>Renew</code> requests.
ValidateTarget		Specifies the token to be validated. This property can contain either a reference to the token or it can contain the token itself. The property is required for and used only with the <code>Validate</code> method.
RenewTarget		Specifies the token to be renewed. This property can contain either a reference to the token or it can contain the token itself. This property is required for and used only with the <code>Renew</code> method.
Renewing	<code>RenewingType</code>	Specifies a request for a renewable token. This property is optional. If you do not specify the <code>Renewing</code> property, the vCenter Single Sign-On server will issue a renewable token. This property is optional.
DelegateTo		Specifies a security token or token reference for an identity to which the requested token will be delegated. The <code>DelegateTo</code> value must identify a solution.
Delegatable	xs:boolean	Indicates whether the requested token can be delegated to an identity. Use this property together with the <code>DelegateTo</code> property. The default value for the <code>Delegatable</code> property is false.
UseKey	<code>UseKeyType</code>	References a token for subject confirmation. Required for <code>Issue</code> , <code>Renew</code> , and <code>Validate</code> methods.

Table 2-1. RequestSecurityTokenType Elements (vCenter Single Sign-On) (continued)

Element	Datatype	Description
KeyType	string	String value corresponding to a <code>KeyTypeOpenEnum</code> value. The value is a URI (Uniform Resource Identifier) that specifies the requested key cryptography type. This property is optional.
SignatureAlgorithm	string	Specifies a URI (Uniform Resource Identifier) for an algorithm that produces a digital signature for the token. The following list shows the valid values: <ul style="list-style-type: none"> ■ http://www.w3.org/2000/09/xmldsig#rsa-sha1 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha256 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha384 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha512
BinaryExchange	<code>BinaryExchangeType</code>	Contains data for challenge negotiation between the vCenter Single Sign-On client and vCenter Single Sign-On server.
Participants	<code>ParticipantsType</code>	Specifies the identities of participants that are authorized to use the token.
AdviceSet	<code>AdviceSetType</code>	List of <code>AdviceType</code> .

RequestSecurityTokenResponseCollectionType

Returned by the `Issue` method. This type contains a response to the request or the requested token. .

Table 2-2. RequestSecurityTokenResponseCollectionType

Element	Datatype	Description
<code>RequestSecurityTokenResponse</code>	<code>RequestSecurityTokenResponseType[]</code>	List of token request response objects. The current arch supports a single token response only

RequestSecurityTokenResponseType

Describes a single token.

Table 2-3. RequestSecurityTokenResponseType Properties (vCenter Single Sign-On)

Element	Datatype	Description
Context	string	<code>RequestSecurityTokenResponse</code> attribute specifying a URI (Uniform Resource Identifier) that identifies the original request. This attribute is included in the response if it was specified in the request.
TokenType	string	

**Table 2-3. RequestSecurityTokenResponseType Properties (vCenter Single Sign-On)
(continued)**

Element	Datatype	Description
		<p>Identifies the type of token in the response. TokenType is specified as a URI (Uniform Resource Identifier), one of the following:</p> <ul style="list-style-type: none"> ■ urn:oasis:names:tc:SAML:2.0:assertion – for issue and renew operations. ■ http://docs.oasis-open.org/ws-sx/ws-trust/200512/RSTR/Status – for validation operations.
Lifetime	LifetimeType	<p>Time period during which a token is valid. The lifetime in the token response is the actual lifetime assigned by the vCenter Single Sign-On server. The lifetime specifies creation and expiration values.</p>
RequestedSecurityToken	RequestedSecurityTokenType	<p>SAML token.</p>
Renewing	RenewingType	<p>Indicates whether or not the token can be renewed. By default, the vCenter Single Sign-On server will issue a renewable token.</p>
BinaryExchange	BinaryExchangeType	<p>Contains data for challenge negotiation between vCenter Single Sign-On client and vCenter Single Sign-On server.</p>
KeyType	string	<p>Indicates whether or not key cryptography is used. The KeyType is a string value corresponding to an enumerated type value. See <code>KeyTypeOpenEnum</code>. The value is a URI (Uniform Resource Identifier) that specifies the key type.</p>
SignatureAlgorithm	string	<p>Indicates a URI (Uniform Resource Identifier) for an algorithm that produces a digital signature for the token. The following list shows the valid values:</p> <ul style="list-style-type: none"> ■ http://www.w3.org/2000/09/xmldsig#rsa-sha1 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha256 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha384 ■ http://www.w3.org/2001/04/xmldsig-more#rsa-sha512
Delegatable	xs:boolean	<p>Indicates whether the requested token can be delegated to an identity.</p>
Status	StatusType	<p>Indicates the status of the request. The property specifies <code>Code</code> and <code>Reason</code> values.</p>

LifetimeType

Specifies the token lifetime. Used in `RequestSecurityTokenType` and `RequestSecurityTokenResponseType`.

Table 2-4. LifetimeType Properties

Property	Datatype	Description
created	wsu:AttributedDateTime	Creation time of the token. XML date and time, expressed as a standard time value (Gregorian calendar).
expires	wsu:AttributedDateTime	Time interval during which the token is valid, starting at the <code>created</code> time. The time interval is an absolute value specified in seconds.

RenewingType

Specifies token renewal.

Table 2-5. RenewingType Properties

Property	Data Type	Description
Allow	xsd:boolean	Specifies a request for a token for which the lifetime can be extended. This property is optional. The default value is <code>true</code> .
OK	xsd:boolean	Indicates that the vCenter Single Sign-On client will accept a token that can be renewed after it has expired. This property is optional. The default value is <code>false</code> . If you specify this property, you must specify a value of <code>false</code> . A token that can be renewed after expiration does not provide adequate security.

KeyTypeOpenEnum

Specifies a set of enumerated type values that identify the supported types of key cryptography used for security tokens. The values are URIs (Universal Resource Identifiers).

Table 2-6. KeyType Properties

Enumerated type value	Description
<code>http://docs.oasis-open.org/ws-sx/ws-trust/200512/PublicKey</code>	Specifies asymmetric key cryptography using a combination of public and private keys. Use this key type for holder-of-key tokens.
<code>http://docs.oasis-open.org/wssx/wstrust/200512/Bearer</code>	Indicates a bearer token, which does not require a key to authenticate the token.

UseKeyType

Specifies the URI for an existing key.

Table 2-7. UseKeyType Properties

Property	Datatype	Description
Sig	string	URI (Universal Resource Identifier) that refers to a security token which contains an existing key. If specified, the vCenter Single Sign-On server will use the associated certificate for subject confirmation.

ParticipantsType

Identifies users and services who are allowed to use the token.

Table 2-8. ParticipantsType Properties

Property	Datatype	Description
Primary	ParticipantType	Primary user of the token.
Participant	ParticipantType	List of participants who are allowed to use the token.

ParticipantType

ParticipantType is an end point reference.

Table 2-9. ParticipantType Property

Property	Datatype	Description
	EndpointReference	Specifies a participant represented as a URI.

EndpointReference

Participant identification. The ReferenceParameters, Metadata, and any elements are not used.

Table 2-10. EndpointReference Property

Property	Datatype	Description
name	tns:AttributedURIType	URI that identifies a participant allowed to use a token.

BinaryExchangeType

Specifies a blob (binary large object) that contains data for negotiation between the vCenter Single Sign-On client and server.

Table 2-11. BinaryExchangeType Attributes

Attribute	Datatype	Description
ValueType	xsd:anyURI	Identifies the type of negotiation.
EncodingType	xsd:anyURI	Identifies the encoding format of the blob.

AdviceType

Specifies additional informational attributes to be included in the issued token. The vCenter Single Sign-On client can ignore this data. Advice data will be copied to delegate tokens. This type is used in `RequestSecurityTokenType`.

Table 2-12. AdviceType Properties

Element/Attribute	Datatype	Description
Advicesource	string	AdviceType attribute specifying a URI representing the identity that provides the advice Attribute elements. This attribute is required.
Attribute	AttributeType	Advice data.

AttributeType

Attribute providing advice data. Used in `AdviceType`.

Table 2-13. AttributeType Properties

Element/Attribute	Datatype	Description
Name	string	AttributeType attribute specifying a URI that is the unique name of the attribute. This attribute is required.
FriendlyName	string	AttributeType attribute specifying a human-readable form of the name. This attribute is optional.
AttributeValue	string	<p>List of values associated with the attribute.</p> <p>The <code>AttributeValue</code> structure depends on the following criteria:</p> <ul style="list-style-type: none"> ■ If the attribute has one or more values, the <code>AttributeType</code> contains one <code>AttributeValue</code> for each value. Empty attribute values are represented by empty <code>AttributeValue</code> elements. ■ If the attribute does not have a value, the <code>AttributeType</code> does not contain an <code>AttributeValue</code>.

vCenter Single Sign-On Client Example (JAX-WS)

3

This chapter describes a Java example of acquiring a vCenter Single Sign-On security token.

Read the following topics next:

- [vCenter Single Sign-On Token Request Overview](#)
- [Using Handler Methods for SOAP Headers in Java](#)
- [Sending a Request for a Security Token in Java](#)

vCenter Single Sign-On Token Request Overview

The code examples in the following sections show how to use the `Issue` method to acquire a holder-of-key security token. To see an example of using the token to login to a vCenter server, see [Chapter 3 vCenter Single Sign-On Client Example \(JAX-WS\)](#). The code examples in this chapter are based on the following sample file located in the vCenter Single Sign-On SDK JAX-WS client `samples` directory:

```
.../JAXWS/samples/com/vmware/sso/client/samples/  
AcquireHoKTokenByUserCredentialSample.java
```

The `AcquireHoKTokenByUserCredentialSample` program creates a token request and calls the `issue` method to send the request to a vCenter Single Sign-On server. The program uses a sample implementation of Web services message handlers to modify the SOAP security header for the request message.

This example uses the username-password security policy (`STSSecPolicy_UserPwd`). This policy requires that the SOAP security header include a timestamp, username and password, and a digital signature and certificate. The sample message handlers embed these elements in the message.

The example performs the following operations:

- 1 Create a security token service client object (`STSService_Service`). This object manages the vCenter Single Sign-On header handlers and it provides access to the vCenter Single Sign-On client API methods. This example uses the `issue` method.
- 2 Create a vCenter Single Sign-On header handler resolver object (`HeaderHandlerResolver`). This object acts as a container for the different handlers.

- 3 Add the handlers for timestamp, user credentials, certificate, and token extraction to the handler resolver.
- 4 Add the handler resolver to the security token service.
- 5 Retrieve the STS port (`STS_Service`) from the security token service object.
- 6 Create a security token request.
- 7 Set the request fields.
- 8 Set the endpoint in the request context. The endpoint identifies the vCenter Single Sign-On server.
- 9 Call the issue method, passing the token request.
- 10 Handle the response from the vCenter Single Sign-On server.

Using Handler Methods for SOAP Headers in Java

The VMware vCenter Single Sign-On SDK provides sample code that is an extension of the JAX-WS XML Web services message handler (`javax.xml.ws.handler`). The sample code consists of a set of SOAP header handler methods and a header handler resolver, to which you add the handler methods. The handler methods insert timestamp, user credential, and message signature data into the SOAP security header for the request. A handler method extracts the SAML token from the vCenter Single Sign-On server response.

The VMware vCenter Single Sign-On client SOAP header handler files are located in the `soaphandlers` directory:

```
SDK/sso/java/JAXWS/samples/com/vmware/sso/client/soaphandlers
```

To access the SOAP handler implementation, the example code contains the following import statements:


```
import com.vmware.sso.client.soaphandlers.HeaderHandlerResolver;
import com.vmware.sso.client.soaphandlers.SSOHeaderHandler;
import com.vmware.sso.client.soaphandlers.SamlTokenExtractionHandler
import com.vmware.sso.client.soaphandlers.TimeStampHandler;
import com.vmware.sso.client.soaphandlers.UserCredentialHandler;
import com.vmware.sso.client.soaphandlers.WsSecurityUserCertificateSignatureHandler;
```

This example uses the following handler elements:

- HeaderHandlerResolver
- SamlTokenExtractionHandler
- TimeStampHandler
- UserCredentialHandler
- WsSecurityUserCertificateSignatureHandler (SSOHeaderHandler)

The following sequence shows the operations and corresponding Java elements for message security.

- 1 Create an STS service object (STSService_Service). This object will bind the handlers to the request and provide access to the issue method.
- 2 Create a handler resolver object (HeaderHandlerResolver). This object acts as a receptacle for the handlers.
- 3 Add the header handlers:
 - Timestamp – The handler will use system time to set the timestamp values.
 - User credential – The handler requires a username and a password; it will create a username token for the supplied values.
 - User certificate signature – The handler requires a private key and an x509 certificate. The handler will use the private key to sign the body of the SOAP message (the token request), and it will embed the certificate in the SOAP security header.
 - SAML token extraction – The handler extracts the SAML token directly from vCenter Single Sign-On server response to avoid token modification by the JAX-WS bindings.
- 4 Add the handler resolver to the STS service.

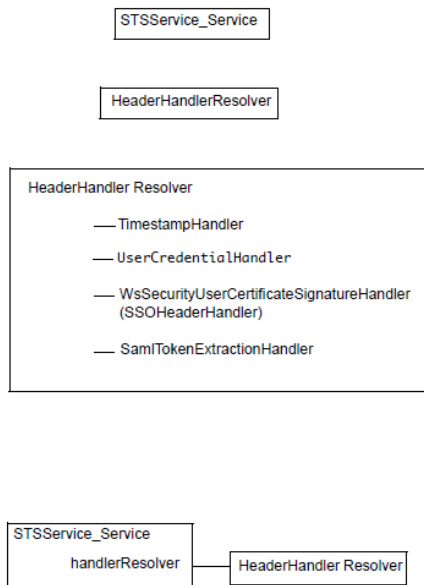

The following example creates a handler resolver and adds the handler methods to the handler resolver. After the handlers have been established, the client creates a token request and calls the `Issue` method. See [Sending a Request for a Security Token in Java](#).

Important You must perform these steps for message security before retrieving the STS service port. An example of retrieving the STS service port is shown in [Sending a Request for a Security Token in Java](#).

Example: Acquiring a vCenter Single Sign-On Token – Soap Handlers

```

/*
 * Instantiate the STS Service
 */
STSService_Service stsService = new STSService_Service();

/*
 * Instantiate the HeaderHandlerResolver.
 */
HeaderHandlerResolver headerResolver = new HeaderHandlerResolver();

/*
 * Add handlers to insert a timestamp and username token into the SOAP security header
 * and sign the message.
 *
 * -- Timestamp contains the creation and expiration time for the request
 * -- UsernameToken contains the username/password
 * -- Sign the SOAP message using the combination of private key and user certificate.
 *
 * Add the TimeStampHandler
  
```

```

*/
headerResolver.addHandler(new TimeStampHandler());

/*
 * Add the UserCredentialHandler. arg[1] is the username; arg[2] is the password.
 */
UserCredentialHandler ucHandler = new UserCredentialHandler(args[1], args[2]);
headerResolver.addHandler(ucHandler);

/*
 * Add the message signature handler (WsSecurityUserCertificateSignatureHandler);
 * The client is responsible for supplying the private key and certificate.
 */
SSOHeaderHandler ssoHandler =
    new WsSecurityUserCertificateSignatureHandler(privateKey, userCert);
headerResolver.addHandler(ssoHandler);

/*
 * Add the token extraction handler (SamlTokenExtractionHandler).
 */
SamlTokenExtractionHandler sbHandler = new SamlTokenExtractionHandler();
headerResolver.addHandler(sbHandler);

/*
 * Set the handlerResolver for the STSService to the HeaderHandlerResolver created above.
 */
stsService.setHandlerResolver(headerResolver);

```


Sending a Request for a Security Token in Java

After setting up the SOAP header handlers, the example creates a token request and calls the issue method. The following sequence shows the operations and corresponding Java elements.

- 5 Retrieve the STS service port (STSService). The service port provides access to the vCenter Single Sign-On client API methods. The vCenter Single Sign-On handler resolver must be associated with the STS service before you retrieve the service port. See [“Using Handler Methods for SOAP Headers”](#) on page 34.




- 6 Create a token request (RequestSecurityTokenType). Your vCenter Single Sign-On client will pass the token request to the Issue method. The Issue method will send the token request in the body of the SOAP message. This example sets the token request fields as appropriate for a holder-of-key token request.




- 7 Set the token request fields.


- lifetime – Creation and expiration times.
- token type – urn:oasis:names:tc:SAML:2.0:assertion
- request type – <http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue>
- key type – <http://docs.oasis-open.org/ws-sx/ws-trust/200512/PublicKey> (for holder-of-key token type)
- signature algorithm – <http://www.w3.org/2001/04/xmldsig-more#rsa-sha256>
- renewable status



- 8 Set the endpoint address for the token request.



- 9 Call the Issue method.



- 10 Handle the response from the vCenter Single Sign-On server.



The following code example shows Java code that performs these operations.

Example: Acquiring a vCenter Single Sign-On Token – Sending the Request

```

/*
 * Retrieve the STSServicePort from the STSService_Service object.
 */
STSService stsPort = stsService.getSTSServicePort();

/*
 * Create a token request object.
 */
RequestSecurityTokenType tokenType = new RequestSecurityTokenType();

/*
 * Create a LifetimeType object.
 */
LifetimeType lifetime = new LifetimeType();

/*
 * Derive the token creation date and time.
 * Use a GregorianCalendar to establish the current time,
 * then use a DatatypeFactory to map the time data to XML.
 */
DatatypeFactory dtFactory = DatatypeFactory.newInstance();
GregorianCalendar cal = new GregorianCalendar(TimeZone.getTimeZone("GMT"));
XMLGregorianCalendar xmlCalendar = dtFactory.newXMLGregorianCalendar(cal);
AttributedDateTime created = new AttributedDateTime();
created.setValue(xmlCalendar.toXMLFormat());
  
```



```

/*
 * Specify a time interval for token expiration (specified in milliseconds).
 */
AttributedDateTime expires = new AttributedDateTime();
xmlCalendar.add(dtFactory.newDuration(30 * 60 * 1000));
expires.setValue(xmlCalendar.toXMLFormat());

/*
 * Set the created and expires fields in the lifetime object.
 */
lifetime.setCreated(created);
lifetime.setExpires(expires);

/*
 * Set the token request fields.
 */
tokenType.setTokenType("urn:oasis:names:tc:SAML:2.0:assertion");
tokenType.setRequestType("http://docs.oasis-open.org/ws-sx/ws-trust/200512/Issue");
tokenType.setLifetime(lifetime);
tokenType.setKeyType("http://docs.oasis-open.org/ws-sx/ws-trust/200512/PublicKey");
tokenType.setSignatureAlgorithm("http://www.w3.org/2001/04/xmldsig-more#rsa-sha256");

/*
 * Specify a token that can be renewed.
 */
RenewingType renewing = new RenewingType();
renewing.setAllow(Boolean.TRUE);
renewing.setOK(Boolean.FALSE); // WS-Trust Profile: MUST be set to false
tokenType.setRenewing(renewing);

/* Get the request context and set the endpoint address. */
Map<String, Object> reqContext = ((BindingProvider) stsPort).getRequestContext();
reqContext.put(BindingProvider.ENDPOINT_ADDRESS_PROPERTY, args[0]);

/*
 * Use the STS port to invoke the "issue" method to acquire the token
 * from the vCenter Single Sign-On server.
 */
RequestSecurityTokenResponseCollectionType issueResponse = stsPort.issue(tokenType);

/*
 * Handle the response - extract the SAML token from the response. The response type
 * contains the token type (SAML token type urn:oasis:names:tc:SAML:2.0:assertion).
 */
RequestSecurityTokenResponseType rstResponse =
issueResponse.getRequestSecurityTokenResponse();
RequestedSecurityTokenType requestedSecurityToken = rstResponse.getRequestedSecurityToken();

/*
 * Extract the SAML token from the RequestedSecurityTokenType object.
 * The generic token type (Element) corresponds to the type required
 * for the SAML token handler that supports the call to LoginByToken.
 */
Element token = requestedSecurityToken.getAny();

```

LoginByToken Example (JAX-WS)

4

This chapter describes a Java example of using the `LoginByToken` method. A vCenter Server session begins with the call to the `LoginByToken` method after receiving the token from the SSO Server.

Read the following topics next:

- [vCenter Server Single Sign-On Session](#)
- [Steps to Connect with a vSphere Server](#)

vCenter Server Single Sign-On Session

After you obtain a SAML token from the vCenter Single Sign-On server, you can use the vSphere Web Services API method `LoginByToken` to establish a single sign-on session with a vCenter Server. See [Chapter 4 LoginByToken Example \(JAX-WS\)](#) for an example of obtaining a vCenter Single Sign-On token.

At the beginning of a vCenter Single Sign-On session, your client is responsible for the following tasks:

- Insert the vCenter Single Sign-On token and a timestamp into the SOAP header of the `LoginByToken` message.
- Maintain the vCenter Server session cookie. During the login sequence, the server produces an HTTP session cookie to support the persistent connection. Your client must save this cookie and re-introduce it at the appropriate times.
- If at a later time your client invokes the `LoginByToken` method, or other login method, the Server issues a new session cookie in response. You must have a cookie handler in place to save the cookie for subsequent requests.

The example program uses these general steps:

- 1 Call the `RetrieveServiceContent` method. The method establishes the connection with the vCenter Server and provides access to the `SessionManager` managed object.

- 2 Call the `LoginByToken` method to authenticate the vCenter session. To send the token to the vCenter Server, the client uses a handler to embed the token and a time stamp in the SOAP header for the message. The client uses an HTTP header handler method to extract the cookie from the vCenter Server response.
- 3 Restore the session cookie for future requests. To identify the session started with the `LoginByToken` method, the client uses a handler to embed the session cookie in the HTTP header.


HTTP and SOAP Header Handlers in Java

To use a vCenter Single Sign-On token to login to a vCenter server, the example uses header handlers to manipulate the HTTP and SOAP header elements of the login request. After establishing a handler, subsequent requests automatically invoke the handler.

- Insertion handlers put the vCenter Single Sign On token and a timestamp into the SOAP header into the HTTP header of the login request.
- An extraction handler obtains the HTTP session cookie provided by the vCenter Server. After setting up the handler, a call to the `LoginByToken` method will invoke the handler to extract the cookie from the Server response.

The following figure shows the use of handlers to manipulate header elements when establishing a vCenter Single Sign On session with a vCenter Server.

Figure 4-1. Starting a vCenter Session

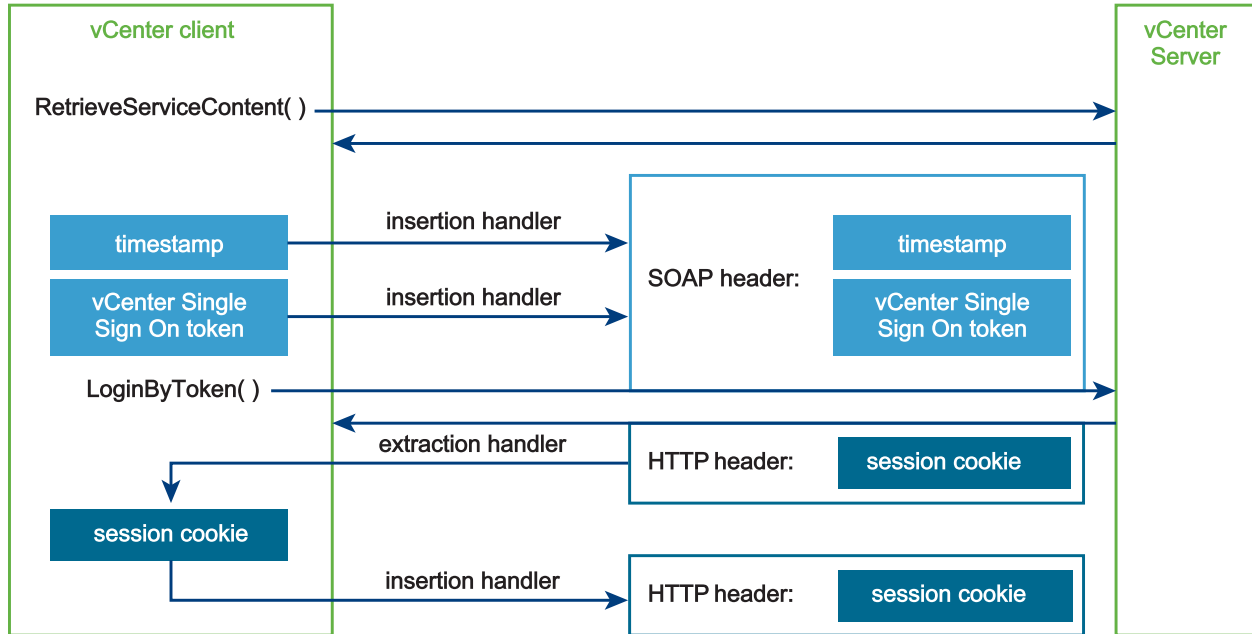

Important Every call to the vCenter Server will invoke any message handlers that have been established. The overhead involved in using the SOAP and HTTP message handlers is not necessary after the session has been established. The example saves the default message handler before setting up the SOAP and HTTP handlers. After establishing the session, the example will reset the handler chain and restore the default handler.

The example code also uses multiple calls to the `VimPortType.getVimPort` method to manage the request context. The `getVimPort` method clears the HTTP request context. After each call to the `getVimPort` method, the client resets the request context endpoint address to the vCenter Server URL. After the client has obtained the session cookie, it will restore the cookie in subsequent requests.

LoginByToken Sample Code in Java

The code examples in the following sections show how to use the `LoginByToken` method with a holder-of-key security token. The code examples are based on the sample code contained in the vCenter Single Sign-On SDK. The files are located in the Java samples directory (`SDK/ssoclient/java/JAXWS/samples`):

- LoginByToken sample:

```
samples/com/vmware/vsphere/samples/LoginByTokenSample.java
```

- Header cookie handlers:

```
samples/com/vmware/vsphere/soaphandlers/HeaderCookieHandler.java
```

```
samples/com/vmware/vsphere/soaphandlers/HeaderCookieExtractionHandler.java
```

- SOAP header handlers. These are the same handlers that are used in [Chapter 4 LoginByToken Example \(JAX-WS\)](#). The SOAP handler files are located in the vCenter Single Sign-On client `soaphandlers` directory:

```
samples/com/vmware/sso/client/soaphandlers
```

Steps to Connect with a vSphere Server

For a connection with a vSphere server, use the following steps:

- 1 Get the `VimPort` object for access to the vSphere services.
- 2 Call the `RetrieveServiceContent` method.
- 3 Call the `LoginByToken` method; insert a SAML token into the request header..
- 4 Extract the session cookie from the response.
- 5 Use the session cookie to set the request context for future requests.

The following sections describe these steps.

Import the Necessary Java Packages for LoginByToken

The following example describes the packages that you need to import into your application to use the new `LoginByToken` method:

Example: Import the Packages that Are Needed

```
package com.vmware.vsphere.samples;
import java.util.Arrays;
import java.util.HashMap;
import java.util.List;
import java.util.Map;
import javax.xml.ws.BindingProvider;
import javax.xml.ws.handler.HandlerResolver;
import javax.xml.ws.handler.MessageContext;
import org.w3c.dom.Element;
import com.vmware.sso.client.soaphandlers.HeaderHandlerResolver;
import com.vmware.sso.client.soaphandlers.SamlTokenHandler;
import com.vmware.sso.client.soaphandlers.TimeStampHandler;
import com.vmware.vim25.InvalidLocaleFaultMsg;
import com.vmware.vim25.InvalidLoginFaultMsg;
import com.vmware.vim25.ManagedObjectReference;
import com.vmware.vim25.RuntimeFaultFaultMsg;
import com.vmware.vim25.ServiceContent;
import com.vmware.vim25.VimPortType;
import com.vmware.vim25.VimService;
import com.vmware.vsphere.soaphandlers.HeaderCookieExtractionHandler;
```

Get the VimPort for LoginByToken in Java

The following example shows the code to get the `VimPort`:

Example: Getting the VimPort

```

package com.vmware.vsphere.samples;

/**
 * Sample program demonstrating the usage of the new loginByToken method,
 * introduced to authenticate the client using the SAML token obtained from the
 * SSO server.
 *
 * @author VMware, Inc.
 */
public class LoginByTokenExample {
    /**
     * This method invokes the loginByToken method for authentication. Once this
     * method is called the established session is authenticated and operations
     * can be performed on the connected vCenter server
     *
     * @param token
     * {@link Element} representing the SAML token that needs to be
     * used for the authentication
     * @param vcServerUrl
     * The vCenter server URL that needs to be connected
     * @return String authenticated session cookie used by the connection
     * @throws RuntimeFaultFaultMsg
     * @throws InvalidLocaleFaultMsg
     */
    public static String loginUsingSAMLToken(Element token, String vcServerUrl)
        throws RuntimeFaultFaultMsg, InvalidLocaleFaultMsg,
        InvalidLoginFaultMsg {
        VimService vimService = new VimService();
        HandlerResolver defaultHandler = vimService.getHandlerResolver();

        // Step 1 Get the VimPort object
        vimService = new VimService();
        VimPortType vimPort = vimService.getVimPort();

```

Retrieve the Service Content in Java

The following example shows the call to `retrieveServiceContent`.

Example: Call `retrieveServiceContent`

```

// Step 2 Retrieve the service content
Map<String, Object> ctxt = ((BindingProvider) vimPort).getRequestContext();
ctxt.put(BindingProvider.ENDPOINT_ADDRESS_PROPERTY, vcServerUrl);
ctxt.put(BindingProvider.SESSION_MAINTAIN_PROPERTY, false);
ManagedObjectReference SVC_INST_REF = new ManagedObjectReference();
SVC_INST_REF.setType("ServiceInstance");
SVC_INST_REF.setValue("ServiceInstance");
ServiceContent serviceContent = vimPort.retrieveServiceContent(SVC_INST_REF);

```

Invoke the `loginByToken` method in Java

The following example shows the `loginByToken` call.

Example: Call the `loginByToken` Method

```
// Step 3 Invoking the loginByToken method
HeaderHandlerResolver handlerResolver = new HeaderHandlerResolver();
handlerResolver.addHandler(new TimeStampHandler());
handlerResolver.addHandler(new SamlTokenHandler(token));
HeaderCookieExtractionHandler cookieExtractor = new HeaderCookieExtractionHandler();
handlerResolver.addHandler(cookieExtractor);
vimService.setHandlerResolver(handlerResolver);
vimPort = vimService.getVimPort();
Map<String, Object> ctxt2 = ((BindingProvider) vimPort).getRequestContext();
ctxt2.put(BindingProvider.ENDPOINT_ADDRESS_PROPERTY, vcServerUrl);
ctxt2.put(BindingProvider.SESSION_MAINTAIN_PROPERTY, true);
vimPort.loginByToken(serviceContent.getSessionManager(), null);
```

Extract the Session Cookie in Java

After calling the `loginByToken`, you extract the session cookie, as shown in the following example.

Example: Extract the Session Cookie

```
// Step 4 Extract the session cookie that is established in the previous
// call to the server.
String cookie = cookieExtractor.getCookie();
// Clear the HandlerResolver chain setup in step 3 as that is
// required only one time for the invocation of the LoginByToken method.
// After login we do not need this handler thus reverting to the
// original (default) handler.
vimService.setHandlerResolver(defaultHandler);
vimPort = vimService.getVimPort();
```

Inject the Session Cookie Back Into the Request in Java

Before making another call to the server, inject the session cookie back into the request as shown in the following example.

Example: Inject the Session Cookie Back Into the Request

```
// Step 5 Inject the session cookie back into the request once before
// making another call to the server. JAXWS will maintain that cookie
// for all subsequent requests.
Map<String, Object> ctxt3 = ((BindingProvider) vimPort).getRequestContext();
ctxt3.put(BindingProvider.ENDPOINT_ADDRESS_PROPERTY, vcServerUrl);
ctxt3.put(BindingProvider.SESSION_MAINTAIN_PROPERTY, true);
// One time setting of the cookie
@SuppressWarnings("unchecked")
Map<String, List<String>> headers =
    (Map<String, List<String>>) ctxt3.get(MessageContext.HTTP_REQUEST_HEADERS);
if (headers == null) {
```

```
headers = new HashMap<String, List<String>>();  
}  
headers.put("Cookie", Arrays.asList(cookie));  
ctxt3.put(MessageContext.HTTP_REQUEST_HEADERS, headers);  
// Authentication complete. Proceed with rest of the API calls  
// that are required for your functionality.  
return cookie;  
}  
}
```

Additional Information

Please refer to the `LoginByTokenSample` Java sample source in the vSphere Management SDK for more information. Also refer to the VMware *vSphere API Reference Documentation* and the *vSphere Web Services SDK Developer's Setup Guide*.