

vRealize Automation 8 Transition Guide

October 2022

You can find the most up-to-date technical documentation on the VMware website at:

<https://docs.vmware.com/>

VMware, Inc.
3401 Hillview Ave.
Palo Alto, CA 94304
www.vmware.com

Copyright © 2022 VMware, Inc. All rights reserved. [Copyright and trademark information.](#)

Contents

1	vRealize Automation 8 Transition Guide	6
2	Migrating Tenants Using vRealize Suite Lifecycle Manager	7
	Prerequisites for Tenant Migration	8
	Installing vRealize Suite Lifecycle Manager 8.2 Patch 1	8
	Importing vRealize Automation 7.5/7.6	9
	Installing or Upgrading to VMware Identity Manager 3.3.3	9
	Upgrading to vRealize Automation 8.2 Patch 1	10
	Performing an Inventory Sync on vRealize Automation 7 and 8 Environments, and Global Environment	10
	Enabling Multi-Tenancy	11
	How do I migrate tenants	11
	How do I merge tenants	13
3	Using the vRealize Automation 8 Migration Assistant to run a migration assessment	15
	Running a Migration Assessment	15
	View Assessment Results	18
	Considerations About vRealize Automation 8	18
	Scalability Considerations	19
	Using Legacy Extensibility	19
4	Using the vRealize Automation 8 Migration Assistant to run a migration	22
5	Migration Prerequisites	24
6	Migration Limitations	25
	Blueprint Limitations	25
	XaaS Limitations	26
	Network Limitations	26
	Deployment Limitations	27
	vIDM Limitations	28
	Endpoint Limitations	28
	Subscription Limitations	28
	Custom Properties Limitations	29
	Cloud Zone Limitations	30
	Reservation Limitations	30

7	How do I perform a brownfield migration	31
8	Migrating vRealize Automation 7 Infrastructure	33
	How are Business Groups mapped in vRealize Automation 8	36
	Users	36
	Blueprint Considerations	37
	How do I migrate and share a cloud template between projects	38
	How do I use vRealize Automation 6.x blueprints	38
	VMware Cloud Templates	39
	Custom Form Blueprints	39
	Component Profile Blueprints	40
	NSX Support	41
	XaaS Considerations	41
	XaaS Blueprints	42
	Custom Resources	42
	Resource Mapping and Resource Actions	43
	Entitlement Considerations	43
	How are Entitled Actions mapped in vRealize Automation 8	43
	Endpoint Considerations	45
	Approval Policy Considerations	46
	Networking Considerations	50
	Reservation Considerations	54
	Optimized Reservations	54
	Custom Properties Considerations	55
	Property Group Considerations	55
	Multi-Tenancy Considerations	59
9	Migrating vRealize Automation 7 Subscriptions	60
	Subscription Mapping and Considerations	62
10	Migrating vRealize Automation 7 Deployments	65
	Deployment Considerations	66
	NSX Deployment On-Boarding Support	67
11	Migrating vRealize Orchestrator	69
	Migrate an Embedded vRealize Orchestrator 7.x Instance	69
	Migrate an Embedded vRealize Orchestrator 7.x Cluster	71
	Additional Migration Requirements for Content Accessing the File System	72
12	How do I view my migration results	74

How do I view constructs mapping between vRealize Automation 7 and vRealize Automation 8
74

13 What happens during a migration rollback 76

How do I migrate updates to my source environment made after migration 76

14 Manual Post Migration Steps 78

15 Troubleshooting 79

Troubleshooting: Migration Assessment 79

Troubleshooting: Migration Failed 79

Troubleshooting: Migration Rollback Failed 80

vRealize Automation 8 Transition Guide

1

You can use this transition guide to help you migrate your vRealize Automation 7 environment to vRealize Automation 8.

This guide is meant for use with the vRealize Automation 8 transition program. Use this guide for migration paths, use cases, migration assessments, and manual migration steps.

Currently, the vRealize Automation 8 Migration Assistant tool supports migration from these source environments:

- vRealize Automation 7.6
- vRealize Automation 7.5
- vRealize Automation 7.4

Note Tenant migration using VMware Identity Manager is not supported for 7.4 migrations. You must manually create the tenants and then migrate.

Restriction: The vRealize Automation 8 migration assistant does not support migration with an external vRealize Orchestrator instance. The migration assistant only supports embedded vRealize Orchestrator migrations.


Migrating Tenants Using vRealize Suite Lifecycle Manager

2

Depending on your system needs, you might need to migrate your source tenants using vRealize Suite Lifecycle Manager before you can migrate to vRealize Automation 8.x.

Tenant Migration involves close coordination between Workspace ONE Access (formerly known as VMware Identity Manager), vRealize Suite Lifecycle Manager, and vRealize Automation. When migrating tenants using vRealize Suite Lifecycle Manager, embedded VMware Identity Manager data in vRealize Automation 7 is migrated to the Global Environment of VMware Identity Manager version 3.3.3 and later. After migrating tenants, you can perform the merge tenant operation in vRealize Automation, in which you migrate vRealize Automation 7 environment to vRealize Automation 8. For more information on adding, deleting, or managing your tenants, refer to the [Tenant Management](#) section of the vRealize Suite Lifecycle Manager documentation.

Note Tenant migration using vRealize Suite Lifecycle Manager is not supported for vRealize Automation 7.4. Tenant migration is only supported for 7.5 and 7.6.

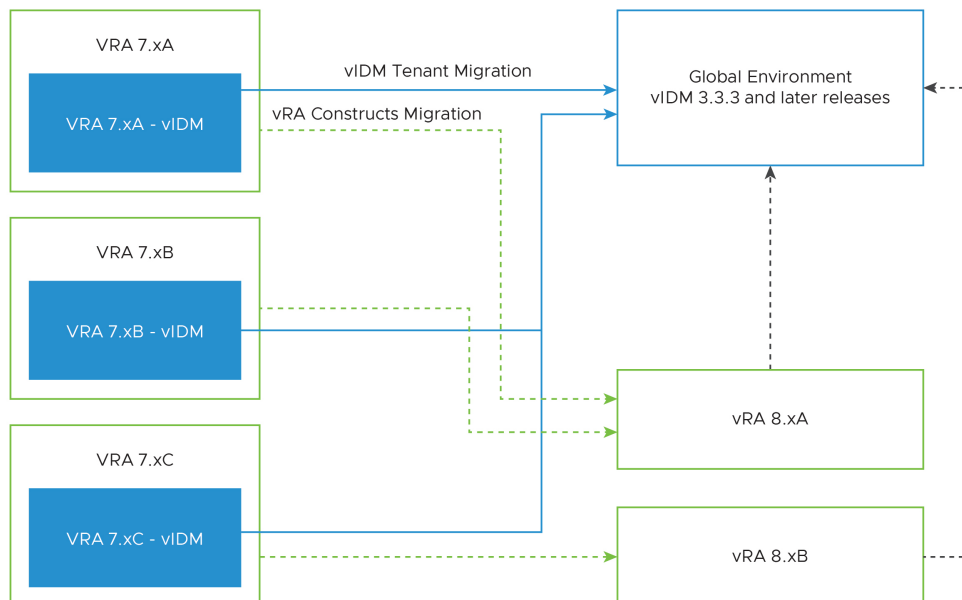

Prerequisites

Before you can migrate tenants, you must perform these prerequisites:

- [Installing vRealize Suite Lifecycle Manager 8.2 Patch 1](#)

- [Importing vRealize Automation 7.5/7.6](#)
- [Installing or Upgrading to VMware Identity Manager 3.3.3](#)
- [Upgrading to vRealize Automation 8.2 Patch 1](#)
- [Performing an Inventory Sync on vRealize Automation 7 and 8 Environments, and Global Environment](#)
- [Enabling Multi-Tenancy](#)

This chapter includes the following topics:

- [Prerequisites for Tenant Migration](#)
- [How do I migrate tenants](#)
- [How do I merge tenants](#)

Prerequisites for Tenant Migration

This topic describes the prerequisites and important instructions for migrating and merging tenants.

Installing vRealize Suite Lifecycle Manager 8.2 Patch 1

You can download the vRealize Suite Lifecycle Manager 8.2 patch 1 by visiting the VMware Patch Download Center and selecting vRealize Suite Lifecycle Manager from the Search by Product drop-down menu.

For vRealize Suite Lifecycle Manager virtual appliances not connected to the Internet:

- 1 Verify that you have taken a snapshot of vRealize Suite Lifecycle Manager VA.
- 2 Log in to vRealize Lifecycle Manager VA.
- 3 On the Lifecycle Operations dashboard, navigate to **Settings > Binary Mapping** and click **Patch Binaries**.
- 4 Click **UPLOAD > SELECT FILE** to upload the vRealize Suite Lifecycle Manager version 8.2 Patch 1 downloaded from [VMware Patch Download Center](#).
- 5 Navigate to **Settings > System Patches**.
- 6 Click **NEW PATCH**, select the patch, and click **NEXT**.
- 7 To install the patch, click **INSTALL**. Once the patch install is triggered successfully, vRealize Suite Lifecycle Manager services are restarted and you are redirected to the vRealize Suite Lifecycle Manager UI login page.

Note To verify your new patch, on the Lifecycle Operations dashboard navigate to **SettingsSystem Patches**, and select **Patch Details**.

For vRealize Suite Lifecycle Manager virtual appliances connected to the Internet:

- 1 Verify that you have taken a snapshot of vRealize Suite Lifecycle Manager VA.
- 2 Log in to vRealize Suite Lifecycle Manager VA.
- 3 On the Lifecycle Operations dashboard, navigate to **Settings > Binary Mapping** and click **Patch Binaries**.
- 4 Click **CHECK PATCHES ONLINE**, search vRealize Suite Lifecycle Manager 8.2 patch and download the patch.
- 5 Navigate to **Settings > System Patches**.
- 6 Click **NEW PATCH**, select the patch, and click **NEXT**.
- 7 To install the patch, click **INSTALL**. Once the patch install is triggered successfully, vRealize Suite Lifecycle Manager services are restarted and you are redirected to the vRealize Suite Lifecycle Manager UI login page.

Note To verify your new patch, on the Lifecycle Operations dashboard navigate to Settings System Patches, and select Patch Details.

Importing vRealize Automation 7.5/7.6

If you have an existing vRealize Automation 7.5 or 7.6 environment, you must import this environment to vRealize Suite Lifecycle Manager, so that vRealize Suite Lifecycle Manager can manage the vRealize Automation environment.

Note For vRealize Automation 7.4 and earlier versions, upgrade to vRealize Automation 7.5 or 7.6, and then import this environment to vRealize Suite Lifecycle Manager.

Installing or Upgrading to VMware Identity Manager 3.3.3

You can perform a new fresh installation of VMware Identity Manager or upgrade an existing instance, using vRealize Suite Lifecycle Manager. You can also upgrade outside vRealize Suite Lifecycle Manager, and then reimport by triggering the inventory sync in vRealize Suite Lifecycle Manager.

For more information about the latest version of VMware Identity Manager and upgrade instructions, see the [VMware Identity Manager Release Notes](#), and then trigger an upgrade from vRealize Suite Lifecycle Manager.

When upgrading VMware Identity Manager, using vRealize Suite Lifecycle Manager:

- Verify that you have taken a snapshot of VMware Identity Manager nodes.
- Verify that you have your product binaries mapped.
- For a clustered VMware Identity Manager upgrade, ensure to disable all the stand-by nodes in the load-balancer so that the traffic is not routed to the stand-by nodes and enable them back once the upgrade is completed.

To complete the upgrade steps, refer to the [Upgrade VMware Identity Manager](#) section of the vRealize Suite Lifecycle Manager documentation.

Upgrading to vRealize Automation 8.2 Patch 1

You can upgrade vRealize Automation in vRealize Suite Lifecycle Manager, and then apply patch 1. When upgrading, follow these instructions.

Prerequisites

- Ensure that you have upgraded vRealize Suite Lifecycle Manager to the latest version.
- Ensure that you have upgraded VMware Identity Manager to 3.3.3.
- If you have installed vRealize Automation 8.0, 8.0.1, or 8.1, then upgrade it to vRealize Automation 8.2 version.
- Perform the binary mapping of the vRealize Automation patch file from Local, myvmware or NFS share. For more information on binary-mapping, see [Configure Product Binaries](#).
- Increase the CPU, memory, and storage as per the system requirements of vRealize Automation 8.2. For more information, see the [Hardware Requirements of vRealize Automation 8.2 Reference Architecture](#).

For instructions on applying the vRealize Automation patch, see [Patching for Products through vRealize Suite Lifecycle Manager](#).

Performing an Inventory Sync on vRealize Automation 7 and 8 Environments, and Global Environment

If you configure your product outside of vRealize Suite Lifecycle Manager, then the products managed from vRealize Suite Lifecycle Manager are out of sync. To update the configuration, you have to trigger the inventory sync.

Performing an inventory sync is useful:

- If there is any failure, inventory sync updates the correct primary node in vRealize Suite Lifecycle Manager.
- If any components of products are added or deleted outside of vRealize Suite Lifecycle Manager, the inventory sync also updates them.
- If a product password is modified, even if you sync it with the inventory, the request eventually fails. In this scenario, retry with the correct password. To modify the password directly in the application, for example, in vRealize Automation, you must run the inventory sync of the product in vRealize Suite Lifecycle Manager so that the modified passwords are synchronized. This action prompts you to provide the modified passwords during an inventory sync.

For all the products across all environments, follow these methods to sync your inventories.

- Click the horizontal ellipses on the product card and click **Trigger Inventory Sync**.

- If there are multiple environments and multiple products within an environment, click the **Trigger Inventory Sync** on the Environment page, which triggers the inventory sync on all the products across all environments.
- Click **View Details** of the product, and then click the **Trigger Inventory Sync**, which triggers the inventory sync for the required product.

Enabling Multi-Tenancy

For tenant migration, you can enable multi-tenancy.

When enabling multi-tenancy:

- Use VMware Identity Manager global environment versions 3.3.3 or later.
- Verify the inventories are synchronized for all the environments in vRealize Suite Lifecycle Manager and all environments and products are up to date. This is to discover all the VMware Identity Manager-product integrations required for VMware Identity Manager re-register.
- Verify that the VMware Identity Manager global environment certificate is managed through the vRealize Suite Lifecycle Manager Locker service.
- Take a snapshot of VMware Identity Manager. VMware Identity Manager must be accessed through tenant FQDNs and existing VMware Identity Manager URLs are not accessible.
- For a clustered VMware Identity Manager, verify VMware Identity Manager cluster health status is green by triggering cluster health. For more information, see [Day 2 Operations with Other Products In vRealize Suite Lifecycle Manager](#) documentation.
- Verify the VMware Identity Manager certificate is updated with the primary tenant alias FQDN. Also ensure that the A-type DNS record is added mapping the primary tenant alias FQDN. For more information about Mandatory Certificate and DNS requirements, see [Multi-Tenancy Model](#).

How do I migrate tenants

vRealize Suite Lifecycle Manager migrates VMware Identity Manager data for vRealize Automation 7.5, 7.6, 8.0 to Global Environment of VMware Identity Manager 3.3.3 and later.

vRealize Suite Lifecycle Manager migrates:

- Tenants
- Directories
- Custom groups
- Roles and rule set
- User attributes
- Access policies
- Network ranges

- Third-party IDP configurations

Prerequisites

- The SMTP information of the source tenant must be configured on the Global Environment of VMware Identity Manager. This information is required to receive email instructions to reset the password for all local users. All local users in the source tenant must have valid email IDs before migrating tenants.
- For migration, you must enable remote connection from the Global Environment of VMware Identity Manager to the vRealize Automation 7.x database. Refer to [KB 81219](#) for more information on enabling remote connection.
- Ensure that you have DNS configured in vRealize Automation and VMware Identity Manager. For more information on DNS and certificate requirements, refer to DNS and Certificate Requirement in the vRealize Suite Lifecycle Manager documentation.
- Ensure that the source vRealize Automation 7.x environment is in a healthy state and directories are synced before tenant migration.

Procedure

- 1 On the My Services dashboard of vRealize Suite Lifecycle Manager, click **Identity and Tenant Management**.
- 2 Select **Tenant Management**, and then click **Tenant Migrations**.
- 3 Read the information on VMware Identity Manager Tenant Migration and vRealize Automation Tenant Mapping, and then click **Continue**.
- 4 On the Environment Selection tab, select the Source Environment and Target Environment. Based on your source and the target environment selection, you can view a tabular representation of the available tenants on the source vRealize Automation. You can also view the status of the migrated or merged tenants on vRealize Automation 8.x.
- 5 Click **Next**.
- 6 On the Tenant Migration Workflow page, you can view the workflow of Tenant Migration and Tenant Merge, and understand the correlation between the two operations.

In Tenant migration, the specific data of VMware Identity Manager is migrated to the destination tenant of Global Environment using vRealize Suite Lifecycle Manager. vRealize Suite Lifecycle Manager also creates 7.x endpoint when adding a new tenant on vRealize Automation 8.x. In Tenant Merge, the directories and tenants are already created on the source vRealize Automation 8.x. vRealize Suite Lifecycle Manager creates the 7.x endpoint to the existing tenants on vRealize Automation 8.x, so that you can migrate the business groups, infrastructure, and other specific tenants on vRealize Automation.

- 7 Click **SAVE AND NEXT** and read the list of manual steps which must be performed to proceed with the migration. Select the check box to confirm that you have read and verified the prerequisites and limitations.

8 To specify the Tenant Migration Workflow, enter these details on the **Tenant Details** tab.

a Select the **Source Tenant**.

Note The source tenants which are listed are not the migrated or merged tenants.

b Enter the **Tenant Name**.

c Under Target Tenant administrator details, enter the **Target Tenant Username, First Name, Last Name**, valid **Email ID**, and **Password**.

d Click **SAVE AND NEXT**. To specify a directory that must be migrated from the source vRealize Automation 7.x to vRealize Automation 8.x tenant, select one of these directories on the Directory Migration tab.

- System Directory: Connector selection and password creation are not required.
- JIT directory: Connector selection and password creation are not required.
- Active Directory over LDAP: Select a Windows or Linux target Connector and enter the BindPassword.
- OpenLDAP: Select a Windows or Linux target Connector and enter the BindPassword.
- Active Directory with IWA: You can only select a Windows target Connector for the VMware Identity Manager 3.3.3 version. Enter the Bind Password and Domain Admin Password that is required for migration.

Note To migrate a directory is a one-time operation, select all the directories which must be migrated. If the required directories are not selected during migration, you have to perform this operation manually.

9 Click **Validate**. After a successful validation, click **SAVE AND NEXT**.

10 Click **Run Precheck** to validate the tenant details and certificate details. Click **SAVE AND NEXT**.

11 On the **Summary Step** tab, you can view the summary of your selections.

12 Click **SUBMIT** if your validations are successful.

If the validations are not successful and you want to make changes, and then resume the tenant migration operation, click **SAVE AND EXIT**. The same wizard can be opened anytime to rerun the precheck to complete and proceed.

Results

You can view the tenant migration details under the Request Details page. Both VMware Identity Manager and vRealize Automation tenants can be accessed through its tenant FQDNs.

How do I merge tenants

Using vRealize Suite Lifecycle Manager, you can merge tenants.

Prerequisites

- vRealize Automation 8.1 does not require you to accept a source certificate during migration assessment. To merge or manage the tenant using vRealize Suite Lifecycle Manager, you can delete the manually added source environment from vRealize Automation.
- Ensure that specific data of VMware Identity Manager is migrated to the target data in the Global Environment.

Procedure

- 1 On the My Services dashboard of vRealize Suite Lifecycle Manager, click **Identity and Tenant Management**.
- 2 Select **Tenant Management**, and then click **Tenant Migrations**.
- 3 Read the information on VMware Identity Manager Tenant Migration and vRealize Automation Tenant Mapping, and then click **Continue**.

- 4 On the Environment Selection tab, select the Source Environment and Target Environment.
Based on your source and the target environment selection, you can view a tabular representation of the available tenants on the source vRealize Automation. You can also view the status of the migrated or merged tenants on vRealize Automation 8.x.

- 5 Click **Next** on the Tenant Migration Workflow page. You can view the workflow of Tenant Migration and Tenant Merge.

- 6 On the **Merge Details** tab, you can select one or multiple tenant mappings for vRealize Automation 7.x and merge it with the same or different destination tenants for vRealize Automation 8.x.

If you cannot view the target tenant, perform an inventory sync, or perform a product association for the tenant.

- 7 Click **Next** and you can view the summary of your selections on the Summary Step tab.
- 8 Click **SUBMIT** if your validations are successful.

If the validations are not successful and you want to make changes, and then resume the tenant merge operation, click **SAVE AND EXIT**. The same wizard can be opened anytime to rerun the precheck to complete and proceed.

Using the vRealize Automation 8 Migration Assistant to run a migration assessment

3

Before you can migrate to vRealize Automation 8, you need to perform a migration assessment.

You can perform a migration assessment against your source environment and any embedded vRealize Orchestrator instances to determine the migration readiness of your vRealize Automation 7 source environment. The migration assessment alerts you to any system object and its dependencies that are not ready for migration and that will impact your migration process. See [Considerations About vRealize Automation 8](#).

After performing a migration assessment you can then migrate to import content and configuration data from your current vRealize Automation 7 source environment to vRealize Automation 8.

Before you can run a migration assessment and migration, you must enable the migration assistant service.

To enable the migration assistant feature:

- 1 After upgrading and deploying a new vRealize Automation 8 instance, navigate to Identity and Access Management.
- 2 Select the user, edit the role to Cloud Administrator, and migration service administrator or viewer. Add the migration assessment service.
- 3 Log user out of vRealize Automation 8.
- 4 Log user in to vRealize Automation 8 to see the Migration Assessment tile.

This chapter includes the following topics:

- [Running a Migration Assessment](#)
- [View Assessment Results](#)
- [Considerations About vRealize Automation 8](#)

Running a Migration Assessment

You can run a migration assessment against a single vRealize Automation 7, or vRealize Orchestrator source instance to determine migration readiness.

vmw vRealize Automation - Migration Assistant

«

Getting Started

Source Instances

Migration

Infrastructure

Subscriptions

Deployments

Configuration

Getting Started with vRealize Automation 8 Migration Assistant

The migration assistant service first determines the migration readiness of your current vRealize Automation and vRealize Orchestrator 7.5 systems and then allows you to

- 1. Configure source instances**
Before migrating, you must run a migration assessment by adding your vRealize Automation source environment. Any embedded vRealize Orchestrator instances and vRealize Orchestrator instances. Once connected, the migration assessments are run.
- 2. Review Migration Assessment Results**
After the migration assessment is run on your source vRealize Automation and vRealize Orchestrator 7.5 systems, you can view the results on the Infrastructure, Subscriptions, and Deployments pages. Dependencies are identified as ready, ready with warnings, or not ready for migration. You can view the details for each dependency to see additional information.
- 3. Migration**
Incrementally migrate your source environment to vRealize Automation 8 by selecting assessed items listed as ready or ready with warnings from the Infrastructure, Subscriptions, and Deployments pages. Items that are not ready must be reviewed and edited in your source environment before they can be migrated.

Learn more
Several types of vRealize Automation 7 system objects are transformed when migrating to vRealize Automation 8 along with many new features. For more information, see the [Automation 8 Transition Guide](#).

NEXT: ADD A SOURCE INSTANCE


The migration assessment process includes connecting to your vRealize Automation source instances and assessing the vRealize Automation and embedded vRealize Orchestrator instances.

The migration assessment identifies what objects to carry over and migrate. You can review the assessment results and correct items in your source environment that are not correctly set up or ready for migration.

Procedure

- 1 From the Source Instance page, Click **Add a Source Account**.

- 2 Select a vRealize Automation or vRealize Orchestrator source type.

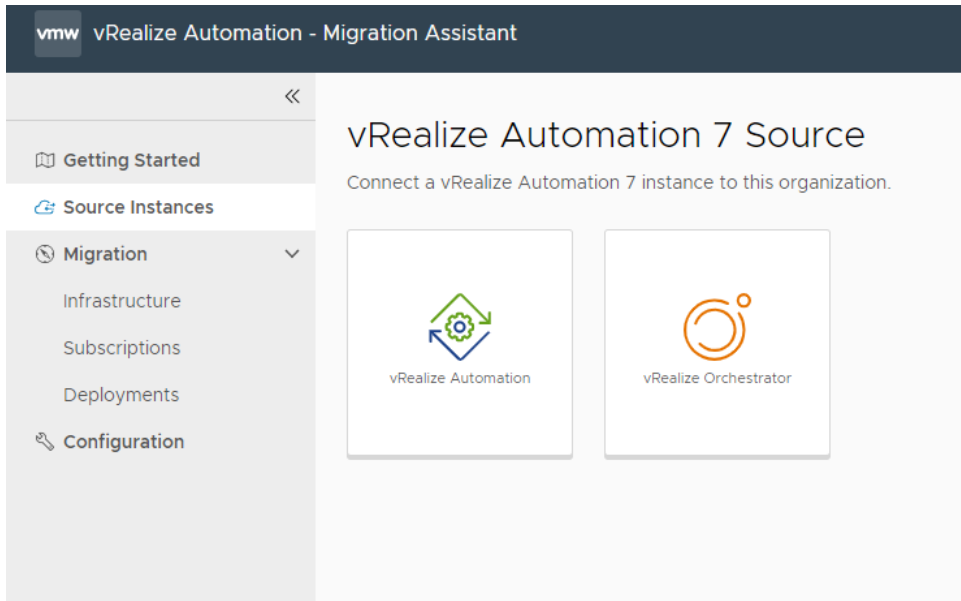

- 3 Enter the credentials of your vRealize Automation 7 or vRealize Orchestrator source environment.

Note You must provide a FQDN or an IP address for the source in the hostname text box. For example, test-n-88-087.test.vmware.com

- 4 Click **Validate and Save** to validate and identify all the tenants that are available for migration.

Note You must provide the system administrator and password of your source environment to identify all available tenants.

- 5 In **Allow migrations from these tenants**, toggle and select which tenants you want to assess in vRealize Automation 8.

Note To assess and migrate multi-tenant environments, you must manually create all tenants and run a migration from each tenant individually. All vRA 7 tenants are visible to vRA 8 tenants.

Note When running a migration assessment on an embedded vRealize Orchestrator only, do not select any tenants.

- 6 (Optional) To run the migration on an embedded vRealize Orchestrator, select **Enabled Assessment for the embedded vRealize Orchestrator**.
- 7 Click **Save** to finish the migration assessment of the selected source tenants.

Results

Your source environment is assessed for migration readiness. You can view the details of the source environment configuration on the source instances page. Additionally, you can export the assessment report to your local drive by clicking **Export** on the source instance's tile.

Note Do not export reports containing more than 200 business groups. A report for an assessment larger than 200 business groups will be compiled from assessment service memory and will not contain business group details.

View Assessment Results

After running a migration assessment on your source instance, you can view the results.

The assessment results are itemized into tabs in the Migration pane:

- Infrastructure
- Subscriptions
- Deployments

The assessed items are listed with their status:

- Ready - Ready for migration. No action is needed for migration readiness.
- Ready with warnings - Ready but needs review. Remediate any issues that might impact migration. For example, some custom properties can be ready with warnings. The custom property: VMware.Network.Type is partially supported and is flagged as ready with warnings because it is unclear how this property behaves regarding extensibility in vRealize Automation 8.
- Not Ready - Not ready for migration. Review details of the item in your source environment and correct areas needing attention or deselect these items for migration.
- Assessing - Item is still being assessed for migration readiness.
- Assessment failed - The assessment failed, retry assessment.

If applicable, after modifying any items listed as not ready or ready with warnings, click **Update** to update its status in the assessment results table.

Note If you add a new business group or delete an already assessed business group, you must update the tenants in your source environment.

Considerations About vRealize Automation 8

vRealize Automation 8 introduces various functional changes.

Review the changes that vRealize Automation 8 introduces to get a better understanding of vRealize Automation 8.

Scalability Considerations

vRealize Automation 8 includes new scalability considerations.

Before proceeding with migration, review the [Scalability and Concurrency Maximums](#).

Using Legacy Extensibility

After migration, the extensibility functionality is hosted in the vRealize Automation Cloud Assembly service and managed by the Event Broker.

Depending on your source environment, you might need to modify existing workflows and action code to optimize extensibility in vRealize Automation 8. Modifications and new functionality include:

- vRealize Orchestrator plugin support
- Postgres and Microsoft SQL server database access
- Rewriting workflow or action code for use with vRealize Automation Cloud Assembly
- Using subscriptions with vRealize Automation Cloud Assembly

vRealize Orchestrator Plugins

Several vRealize Orchestrator plugins are not supported in vRealize Automation.

These plugins are no longer supported:

- vRealize Automation CAFE plugin
- vRealize Automation .NET plugin
- vRealize Automation REST Plugin

You must rewrite all custom content in vRealize Orchestrator to use the new vRealize Automation 8 API interface. Implementations that rely on API calls to vRealize Automation using the REST plugin must be rewritten.

For information on writing workflows that require a reduced effort to refactor, see [Writing Workflows and Action Code for vRealize Automation Cloud Assembly](#).

Postgres and Microsoft SQL Server Database Access

Access to the Postgres and Microsoft SQL Server databases are not supported.

To minimize problems during migration or upgrade, use the supported API interfaces.

Note Currently, there is no guidance for correcting direct database queries between vRealize Automation versions.

Writing Workflows and Action Code for vRealize Automation Cloud Assembly

Using these best practices, you can write extensibility code and workflows to easily interact with vRealize Automation Cloud Assembly.

Use Payload from Event Broker

In cloud assembly, when you subscribe to an event the event broker triggers a workflow and passes to it a payload. The payload should have all of the data that the workflow needs. If the workflow needs additional data, it is available by calling various vRA 8 service APIs.

Extensibility Actions

In vRealize Automation Cloud Assembly you can create customized actions, called Action-Based Extensibility (ABX), using python, nodejs, and powershell scripts without dependency on vRO. For more information on ABX, see [Learn more about extensibility actions](#).

Using Subscriptions in vRealize Automation Cloud Assembly

After migration, use migrated vRealize Automation 7 extensibility in vRealize Automation Cloud Assembly with these subscriptions accordingly.

Not all subscriptions from vRealize Automation 7 can be migrated to vRealize Automation 8. To determine if a subscription can be migrated, review the assessment report.

Table 3-1. Subscriptions in vRealize Automation Cloud Assembly

vRealize Automation 7.x Subscription	vRealize Automation 8 Subscription
Blueprint component completed	Deployment resource completed
Blueprint component requested	Deployment resource requested
Blueprint configuration	Blueprint configuration
Blueprint request completed	Deployment completed
Blueprint requested	Deployment requested
Business group configuration	Not supported
Catalog request completed	Deployment completed
Catalog request received	Deployment requested
Component action completed	Deployment resource action completed
Component action requested	Deployment resource action requested
Deployment action completed	Deployment action completed (deployment.action.post)
Deployment action requested	Deployment action requested (deployment.action.pre)
Endpoint action	Not supported
EventLog default event	EventLog
Infrastructure endpoint test connection	Not supported
IPAM IP lifecycle event completion	Not supported
Machine lifecycle	Not supported

Table 3-1. Subscriptions in vRealize Automation Cloud Assembly (continued)

vRealize Automation 7.x Subscription	vRealize Automation 8 Subscription
Machine provisioning	Conditional, dependent on state.
Orchestration server configuration	Not supported
Orchestration server configuration (XaaS)	Not supported
Post Approval	Not supported
Pre Approval	Not supported
Resource Reclamation completion event	Not supported

Using the vRealize Automation 8 Migration Assistant to run a migration

4

After running a migration assessment, use the migration assistant tool to migrate your source environment to vRealize Automation 8.

The vRealize Automation 8 Migration Assistant allows you to incrementally migrate your source environment with zero downtime or a scheduled maintenance window. This provides more customization and control over which infrastructure, subscription, and deployment components are migrated to vRealize Automation 8. The vRealize Automation migration assistant only migrates used or published content. The migration assistant does not migrate disabled or draft content. Before you can migrate you have to perform a migration assessment on your source environment. This assessment determines the migration readiness of your source environment components. After running a migration assessment, the results are listed on the **Assessment > Infrastructure** page by tenant. All assessed items are listed with their status:

- Ready - Ready for migration. No action is needed for migration readiness.
- Ready with warnings - Ready but needs review. Remediate any issues that might impact migration.
- Not Ready - Not ready for migration. Review details of the item in your source environment and correct areas needing attention.
- Assessing - Still being assessed for migration readiness.
- Assessment failed - The assessment failed. Verify that vRealize Orchestrator and vRealize Automation are accessible and retry assessment.

To migrate, select the items you want to migrate and click **Migrate**. The status updates to:

- Migrating - Item is being migrated.
- Migrated - Migration is complete and successful. You can view and use the migrated item in your vRealize Automation 8 environment.
- Failed - The migration failed. Review the item in your source environment, modify as needed, retry migration.
- Excluded - Business group, subscription, or deployment that was listed as Not ready was migrated but its not ready items were not migrated and are listed as excluded.

If the component you are migrating has dependencies that have not been migrated first the migration fails. For example, if you want to migrate a subscription that has infrastructure criteria you must first migrate the infrastructure component.

Note Once you migrate a deployment, the migration of its associated business group is complete.

After migration, your vRealize Automation 7 source content remains unchanged.

Incremental Migration

The vRealize Automation 8 migration assistant allows you to incrementally migrate your source environment instead of performing a full migration all at once. For example, you can migrate a business group with 5 blueprints, then create or publish 5 more in your source environment and migrate those 5 to the same business group. Only new source environment content is migrated. Changes to any migrated source content will not be migrated.

Migration Prerequisites

5

Before you can use the migration assistant tool to migrate your vRealize Automation 7 source environment to vRealize Automation 8, ensure that these prerequisites are met.

Migration Prerequisites

- Backup your vRealize Automation 7 source environment.
- If your source vRealize Automation 7 content has dependencies on vRealize Orchestrator, you must first migrate vRealize Orchestrator. For more information about migrating vRealize Orchestrator, see [Migrating vRealize Orchestrator](#).
- Create or [Chapter 2 Migrating Tenants Using vRealize Suite Lifecycle Manager](#).
- You must first import and install the IPAM plugin in vRealize Automation Cloud Assembly to migrate an IPAM endpoint.
- After running a migration assessment, the vRO Azure endpoint configuration is populated on the Configuration tab. Before running a migration, you must manually enter the key by editing the configuration. If you attempt to migrate without providing the endpoint key, the migration fails.
- For subscriptions, the input type 'payload' is not supported in vRealize Automation 8. Before migrating your vRealize Automation 7 subscriptions, you must update the input type to 'Properties'.
- vRealize Automation 8.1 did not require you to accept a source certificate during migration assessment. As a result, you must reassess your source environment. To reassess your source environment and accept the source certificate: delete the source environment, re-add it, accept the certificate, and reassess the source environment using the migration assistant service.
- Ensure your vRA license is up-to-date and active before proceeding with migration.
- In preparation for migration, ensure you exclude virtual machine memory from snapshots.

Migration Limitations

6

The vRealize Automation 8 migration assistant tool includes some migration limitations.

This chapter includes the following topics:

- [Blueprint Limitations](#)
- [XaaS Limitations](#)
- [Network Limitations](#)
- [Deployment Limitations](#)
- [vIDM Limitations](#)
- [Endpoint Limitations](#)
- [Subscription Limitations](#)
- [Custom Properties Limitations](#)
- [Cloud Zone Limitations](#)
- [Reservation Limitations](#)

Blueprint Limitations

vRealize Automation 8 Migration Assistant tool includes these limitations.

- In vRealize Automation 8, Blueprints are called VMware Cloud Templates.
- Nested blueprints (Parent blueprint with children blueprints) are not supported in vRealize Automation 8. You can flatten nested blueprints, if desired. However, flattening blueprints will cause you to lose the abstraction layer.
- During migration, lease policies are migrated but the **Minimum lease days** field is not. vRealize Automation 8 migrates minimum lease days as **Maximum Lease Days** and maximum lease days as **Maximum Total Lease**.
- If your source Blueprint contained a reservation policy and that reservation policy is deleted before migration, the reservation policy is migrated and tagged on the VMware Cloud Template. However, when you attempt to provision a VMware Cloud Template (formerly Blueprint) in vRealize Automation 8, it fails because the reservation policy does not exist and issues this error message:

"No placement exists that satisfies all of the request requirements. See if suitable placements and cloud zones exist for the current project and they have been properly tagged."

To remediate this, open the VMware Cloud Template in vRealize Automation 8 and remove the tag.

- Migrating storage reservation policies is not supported in vRealize Automation.

XaaS Limitations

vRealize Automation 8 includes these XaaS Limitations.

If your source environment contains multiple XaaS Blueprints or Custom Resources, they are assessed and migrated these ways:

- If the XaaS Blueprints or Custom Resources belong to the same business group, they are detected during the migration assessment but are blocked for migration. You must unpublish all XaaS Blueprints or Custom Resources except for one. The remaining published XaaS Blueprint or Custom Resource can be migrated. You can then publish the remaining XaaS Blueprints or Custom Resources and remigrate. Remigration only migrates the new content while preserving the previously migrated content.
- You can't have two XaaS blueprints configured to the same workflow. When you have 2 or more XaaS Blueprints or Custom Resources that belong to different business groups but are configured to the same workflow, they are not detected during the migration assessment. When migrated, the first migrated XaaS Blueprint or Custom Resource creates the vRealize Automation 8 XaaS Cloud Template or Custom Resource and is linked to the workflow. As a result, the subsequent XaaS Blueprints or Custom Resources are not configured to the workflow during migration.

Network Limitations

The vRealize Automation 8 Migration Assistant tool includes these network limitations.

- You can only set one CIDR and only use the corresponding the IP ranges.
- CIDR and Subnet size might be inaccurate. You can correct this by editing the sizes in the Network Profile post migration.
- vRealize Automation 8 only supports Infoblox. No other third-party IPAM is supported. All other third-party IPAMs must be ported to the vRealize Automation 8 IPAM SDK by the user.
- The vRealize Automation 8 Migration Assistant does not support blueprints with a private network component that do not contain a private network profile for migration.
- Virtual machine IP allocations for both VMs and onboarded VMs are checked during deployment migration and allocated against the onboarded resources in vRealize Automation 8. If you only migrate your source infrastructure and not your deployments, provisioning virtual machines might fail because your source IP addresses are not migrated and allocated against vRealize Automation 8 onboarded resources.

- After migrating to vRealize Automation 8, all IPAM information is migrated. However, day2 operations, such as deleting deployments, will not release the IP addresses from IPAM. You must manually remove the IP address from IPAM. As a workaround, you can create a subscription to remove the IP from IPAM.

Deployment Limitations

The vRealize Automation 8 migration assistant has these deployment limitations.

- Migration of a deployment is final regardless of whether it succeeded or failed. You cannot retry a deployment migration. You can rerun the plan created by the migration service, under Onboarding service.
- Once migrated, you cannot change the owner of a deployment. Migrated deployments are owned by the user that performed the migration. The original deployment owner is added as a custom property on a machine resource post-migration. To make the deployment accessible to other project members, add the user to the project and enable project share deployments among members.
- Historical costing information is not migrated with deployments. For more information on pricing and costs, see [What are Pricing Cards](#).
- If you migrate a deployment that contains an IPAM-managed IP and then delete the migrated deployment from vRealize Automation 8, you must also manually delete the associated IP address from Infoblox.
- If your source environment includes a load balancer configured to an existing network that is not connected to a machine, the external network is not migrated and the IP is not allocated during migration.
- Deployment migration migrates the associated blueprints but they are no longer linked to the deployment post-migration. If you run an Update on a migrated deployment, it recreates the machine.
- vRealize Automation 7 does not collect data from Azure endpoints nor can it identify if an Azure machine was deleted outside of vRealize Automation 7. During Migration Assessment in vRealize Automation 8, any deleted Azure deployments are listed as Ready but are excluded during migration because the migration assistant cannot find the VMs.
- You cannot migrate a source deployment if it has one or more Nat network components for NSX-T, or one or more network components routed or Nat (or both) to NSX-T.
- If your source deployment contains more than one NSX Load Balancer component, they are migrated as a single Load Balancer component.

Note Not all routes are created on the single component.

- The IP address configured to the NAT network in your source deployments is not marked as allocated post migration. However, the IP addresses of migrated load balancers and VMs are marked as allocated under **Infrastructure > Networks > IP Address** post migration.

- If your source vRealize Automation 7 deployment contains an invalid resource, for example it does not have properties for a resource, then the resource is not migrated. If all the resources are invalid in the deployment, the entire deployment is not migrated.
- During brownfield migration, both onboarded and migrated machines are not linked to cloud zones. As a result, these machines are not calculated into storage maximum definitions.

vIDM Limitations

The vRealize Automation 8 Migration Assistant includes these vIDM limitations.

- vIDM tenant migration is not supported. You must manually create tenants in LCM.

Endpoint Limitations

The vRealize Automation 8 migration assistant tool includes these endpoint limitations.

- After running a migration assessment, the vRO Azure endpoint configuration is populated on the **Configuration** tab. Before running a migration, you must manually enter the key by editing the configuration. If you attempt to migrate without providing the endpoint key, the migration fails.
- For third-party IPAM endpoints, vRealize Automation 8 only supports Infoblox. All other third-party IPAMS must use the vRealize Automation 8 IPAM SDK.
- To be assessed and migrated, endpoints must contain at least one active reservation.
- In vRealize Automation 7, fabric groups were created to specify which regions/compute resources from a given endpoint were available to be managed by vRealize Automation (For example, the regions/compute resources that we can use when provisioning workloads). When an endpoint is migrated, the restrictions imposed by fabric groups are not preserved. Instead, all regions/compute resources belonging to the endpoint are available for management.
- vRealize Automation 8 only supports vSphere 6.x and later. Migration fails for vSphere 5.x or earlier.

Subscription Limitations

The vRealize Automation 8 Migration Assistant tool includes these subscription limitations.

Note You must first migrate vRealize Orchestrator before you can migrate vRealize Automation subscriptions.

vRealize Automation 8 also no longer stops processing subscriptions in the event a workflow fails. If a workflow fails, the migration continues and issues an error saying it is not supported.

vRealize Automation 8 does not support these subscriptions:

- Business groups configuration

- Endpoint action
- Infrastructure endpoint test connection
- IPAM IP lifecycle event completion
- Machine lifecycle
- Orchestration server configuration
- Orchestration server configuration (XaaS)
- Post Approval
- Pre Approval
- Resource reclamation completion event

Custom Properties Limitations

The vRealize Automation 8 Migration Assistant tool includes these custom properties limitations.

vRealize Automation 8 only supports vSphere custom property components. It does not support migration for these custom properties:

- Custom properties specified in reservations
- Custom properties specified in endpoints
- Predefined custom properties:
 - `_debug_deployment`
 - `_Notes`
 - `NSX.Edge.ApplianceSize`
 - `NSX.Edge.HighAvailability`
 - `NSX.Edge.HighAvailability.PortGroup`
 - `VirtualMachine.Rdp.SettingN`
 - `VirtualMachine.Software%.ISOLocation`
 - `VirtualMachine.Software%.ISOName`
 - `VirtualMachine.Software%.Name`
 - `VirtualMachine.Software%.ScriptPath`
- Property Groups. Custom properties in property groups are flatten out into blueprint migration.

Note If a blueprint has a custom properties that use the '.' character it is replaced with '_' character. For example, `VirtualMachine.Core.Count` becomes `VirtualMachine_Core_Count`.

Cloud Zone Limitations

vRealize Automation 8 includes these cloud zone limitations.

- Network and storage allocation does not follow the normal compute selection hierarchy and can fail with errors when shared resources exist across business groups. In the case this type of blueprint, provisioning fails because vRealize Automation 8 cannot find a common resource placement. To prevent this, add a constraint tag to the network and then provision the machine.

Reservation Limitations

vRealize Automation 8 includes these reservation limitations.

vRealize Automation 7.x supported the use of AWS IaaS endpoints to create a keypair on demand for each deployment. This is not supported in vRealize Automation 8.

How do I perform a brownfield migration

7

Using the migration assistant tool, you can perform a brownfield migration of your vRealize Automation 7 source instance and vRealize Automation 8.

If you created infrastructure in vRealize Automation 8 and want to align it with your vRealize Automation 7 infrastructure, you must run a migration assessment and then migrate your source environment. The migration assistant tool compares your existing vRealize Automation 8 infrastructure to the infrastructure in your vRealize Automation 7 source environment. After this comparison, the migration tool only migrates the difference between the two environments.

For example: if you created a project named vSphere Users with one cloud template in vRealize Automation 8 and your vRealize Automation 7 environment contains a business group named vSphere Users with four blueprints, the migration assistant tool only migrates the additional four blueprints (as VMware cloud templates) to the vRealize Automation 8 vSphere Users project.

If the migration is rolled back, the existing vRealize Automation 8 infrastructure is rolled back to its original state before the vRealize Automation 7 migration. Only the migrated source environment content is rolled back, leaving the pre-migration vRealize Automation 8 content intact.

Note Post-migration cloud zone tags are not removed during rollback.

Before performing a brownfield migration, review these considerations:

Cloud Zones

For AWS and Azure, the reservations are merged into one when they use the same region criteria. Similarly, all vSphere reservations are merged into one cloud zone, if they contain the same computes. New tags are added to the cloud zone based on reservation name and reservation policy.

IP Ranges

If your source environment contains overlapping IP ranges, the migration to vRealize Automation 8 fails.

Network Profiles

A new network profile is always created for on-demand networks. During migration, the source environment network profiles are merged into one when they contain the same regionId, isolation type, networks, security groups, and load balancers.

Storage Profiles

For Azure and vSphere, storage profiles are merged into one when they contain the same region and storage description. vRealize Automation 7 does not support storage profiles for AWS.

Projects

New zones are added to existing projects. If the zone exists in the project, the memory limit, instances, and storage limits are set to the maximum of existing project and source projects. Priority is set to the lowest of the two (lower is higher). The user roles of existing projects are also updated if the user already exists.

Migrating vRealize Automation 7 Infrastructure




After running a migration assessment on your vRealize Automation 7 source environment, you can migrate individual business groups to vRealize Automation 8.

The infrastructure results of your migration assessment are listed on the **Migration > Infrastructure** tab. All assessed business groups are listed with their status:


- Ready - Business group is ready for migration. No action is needed for migration readiness.
- Ready with warnings - Business group is ready but needs review. Remediate any issues that might impact migration.
- Not ready - Business group is not ready for migration. Review details of the business group in your source environment and correct areas needing attention.
- Assessing - Business group is still being assessed for migration readiness.
- Assessment failed - The assessment failed, retry assessment.

If applicable, after modifying any business groups listed as not ready or ready with warnings, select the business group and click **Update** to update its status in the assessment results table.

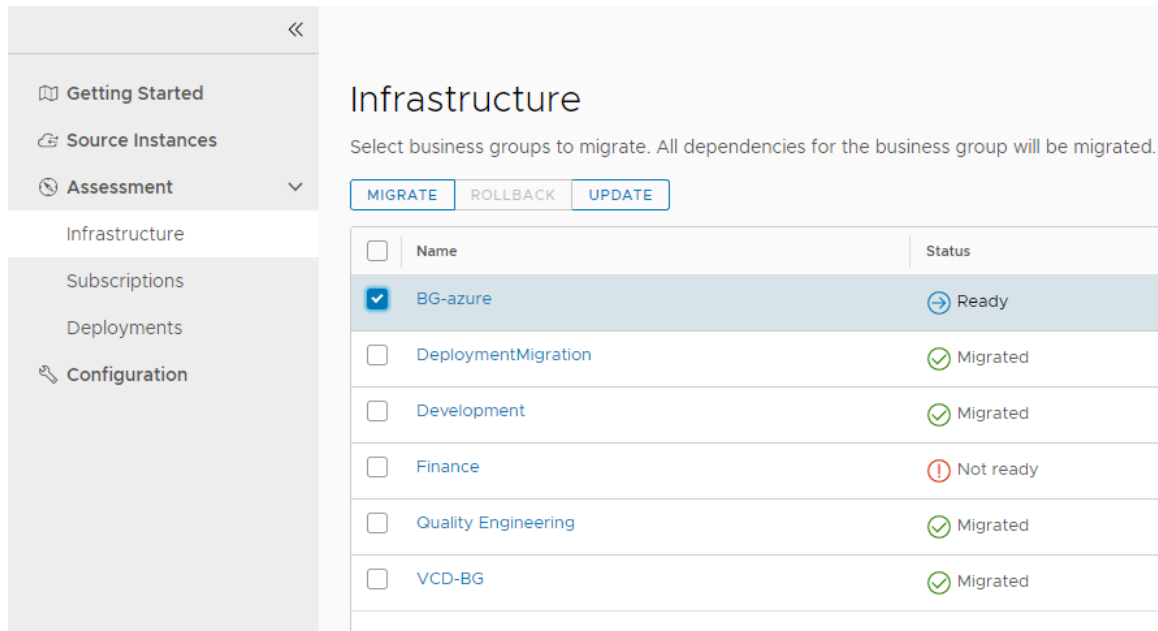

The screenshot shows the 'Infrastructure' section of the vRealize Automation interface. On the left is a navigation menu with options: Getting Started, Source Instances, Assessment (selected), Infrastructure, Subscriptions, Deployments, and Configuration. The main area is titled 'Infrastructure' and contains the instruction: 'Select business groups to migrate. All dependencies for the business group will be migrated.' Below this are three buttons: 'MIGRATE' (highlighted), 'ROLLBACK', and 'UPDATE'. A table lists business groups with checkboxes for selection and their status.

<input type="checkbox"/>	Name	Status
<input checked="" type="checkbox"/>	BG-azure	→ Ready
<input type="checkbox"/>	DeploymentMigration	✓ Migrated
<input type="checkbox"/>	Development	✓ Migrated
<input type="checkbox"/>	Finance	! Not ready
<input type="checkbox"/>	Quality Engineering	✓ Migrated
<input type="checkbox"/>	VCD-BG	✓ Migrated

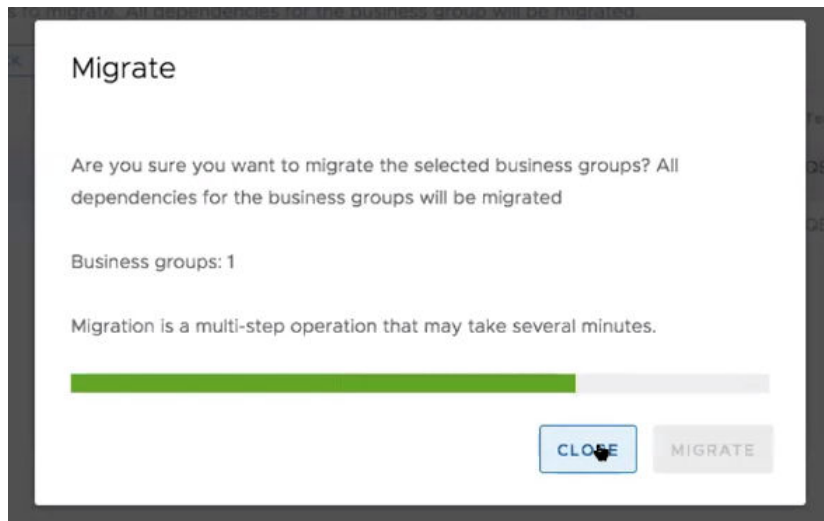

The screenshot shows a 'Migrate' dialog box. It asks: 'Are you sure you want to migrate the selected business groups? All dependencies for the business groups will be migrated'. Below this, it says 'Business groups: 1'. A message states: 'Migration is a multi-step operation that may take several minutes.' There is a green progress bar that is approximately 50% full. At the bottom are two buttons: 'CLOSE' (highlighted) and 'MIGRATE'.

To migrate business groups, select one or more business groups with a ready or ready with warnings status and click migrate. You can roll back previously migrated business groups by selecting the migrated business group and clicking rollback.

Note If time passed between assessing your business groups and migrating them, the migration assistant tool reassesses your business groups. Reassessing business groups is the most time-consuming part of the migration. Consider turning reassessment off if you have not made changes to the source system since the last assessment.

Note If you modify any migrated items and then rollback, all edits post-migration are deleted.

After migrating, you can click the business group name to view its assessment and migration results and status:

- Migrating - Business groups is being migrated.

- **Migrated** - Migration is complete and successful. You can view and use the migrated business group in your vRealize Automation 8 environment.
- **Failed** - The migration failed. Review the business group in your source environment, modify as needed, retry migration.
- **Excluded** - Business group that was listed as Not ready was migrated but its not ready items were not migrated and are listed as excluded. To migrate the not ready/excluded items, you must correct them, reassess, and then remigrate them.

The screenshot displays the vRealize Automation 8 web interface. On the left is a navigation sidebar with a back arrow at the top. The sidebar contains the following menu items: 'Getting Started' (with a book icon), 'Source Instances' (with a cloud icon), 'Assessment' (with a clock icon and a dropdown arrow), 'Infrastructure', 'Subscriptions', 'Deployments', and 'Configuration' (with a wrench icon). The main content area shows the breadcrumb 'Infrastructure > DeploymentMigration >' and the title 'DeploymentMigration'. Below the title, several key-value pairs are listed: 'Status' is 'Migrated' (with a green checkmark icon), 'Dependency types' is '10', 'Last updated' is 'Apr 8, 2020, 6:04:17 AM', 'Migration started' is 'Apr 8, 2020, 6:03:24 AM', and 'Migration finished' is 'Apr 8, 2020, 6:03:30 AM'. Under the 'Assessment' section, a button labeled 'Migration Results' is highlighted with a blue border. Below this is a table with two columns: 'Dependency Type' and 'Status'. The table contains five rows, each with a dependency type and a green checkmark status.

Dependency Type	Status
Endpoint	✓
Deployment	✓
Blueprint	✓
Reservation	✓
Business Group	✓

You can continue to explore the details of the migrated business group by clicking a dependency type and viewing the itemized statuses. Any unsupported infrastructure components that were not able to be migrated are listed as excluded.

This chapter includes the following topics:

- [How are Business Groups mapped in vRealize Automation 8](#)
- [Blueprint Considerations](#)
- [XaaS Considerations](#)
- [Entitlement Considerations](#)
- [Endpoint Considerations](#)
- [Approval Policy Considerations](#)
- [Networking Considerations](#)
- [Reservation Considerations](#)

- Custom Properties Considerations
- Multi-Tenancy Considerations

How are Business Groups mapped in vRealize Automation 8

Business groups and their components are mapped differently in vRealize Automation 8.

Table 8-1. Business Group vRealize Automation 8 Mapping

vRealize Automation 7 Item	vRealize Automation 8 Mapping
Business Group	Project
Machine prefix	Naming template
Custom properties	Custom properties Note The Encrypted and Show in request flags are not migrated to vRealize Automation 8.
Active Directory policy/Active Directory container	Active Directory integration account/project configuration Note vRealize Automation 8 does not support migration for Active directories. You must manually configure them post-migration.
Capacity alert email address	N/A Note vRealize Automation 8 does not support migration for capacity alert email addresses.
Business group managers	Project administrators
Business group users	Project members
Support users	Project members
Shared access users	Project members

Users

Users are migrated from vRealize Automation 7 to vRealize Automation 8 as strings.

vRealize Automation 8 does not perform user validation on migrated users. To make sure your users work, it is recommended to create users first in vRealize Automation 8 then migrate your source environment.

Rule-Based Object Entitlements

In vRealize Automation 7, users were granted object entitlements by user account. In vRealize Automation 8, object entitlements are rule-based by user role, meaning all users of the same role have the same object entitlements. For example, two users with the same user role assigned to the same business group have the same entitlements to all project items.

To govern object entitlements:

- 1 Create a separate project.
- 2 Assign the desired user to the project.
- 3 Assign associated entitled objects to the project.

Note You cannot share deployments between projects.

Blueprint Considerations

In vRealize Automation 8, Blueprints are called VMware Cloud Templates. All migrated vRealize Automation 7 blueprints are migrated as VMware Cloud Templates.

Basic Blueprint Support

vRealize Automation 8 supports these component types and provisioning methods:

- Amazon EC2
- Azure
- vSphere
- Cloning
- Linked Clone

Note vRealize Automation 8 does not support "Use current snapshot".

- OVF

Note OVF server basic authentication and proxy servers are not supported.

- Reservation policies are migrated as constraint tags.

Component Profile Support

Image and Size component profile value sets are migrated as input properties in VMware Cloud Templates.

- Image value sets
 - For OVF image value sets: Proxy server configuration, and basic authentication username and password fields are not migrated to vRealize Automation 8. The vRealize Automation 8 migration assistant supports these provisioning methods used by image value sets:
 - Clone
 - Linked Clone
 - OVF

- Size value sets
 - The storage field is not migrated to vRealize Automation 8.

How do I migrate and share a cloud template between projects

vRealize Automation 8 supports sharing VMware Cloud Templates between projects.

During migration, you can migrate blueprints that are shared with existing projects. You can also maintain shared VMware Cloud Templates across projects even when the original project is rolled back. When the original project is rolled back, the cloud template ownership is transferred to another project.

To migrate shared blueprints:

Procedure

- 1 Run a migration assessment on your vRealize Automation 7 source environment. For more information on how to run a migration assessment, see [Running a Migration Assessment](#).
- 2 Select the **Infrastructure** tab, select the first business group containing the blueprint, and click **Migrate**.

The migrated blueprints and their associated projects are seen on the **Design** tab of vRealize Automation Cloud Assembly and as catalog items in vRealize Automation Service Broker.

- 3 Navigate back to the **Infrastructure** tab, select the additional business groups containing the blueprint, and click **Migrate**.

In vRealize Automation Cloud Assembly, the cloud template is shown as only belonging to the first migrated project, but in vRealize Automation Service Broker the cloud template lists all projects in which it belongs.

What to do next

If you want to rollback the migration of the original business group and transfer blueprint ownership, navigate to the **Infrastructure** tab, select the original business group, and click **Rollback**. After rolling back the original business group, the cloud template ownership automatically transfers to the remaining migrated project associated with the cloud template. Any associated custom forms are also retained post rollback.

How do I use vRealize Automation 6.x blueprints

Before you can use blueprints from vRealize Automation 6.x in vRealize Automation 8, you must first migrate them to vRealize Automation 7.4, 7.5, or 7.6.

After the migrating the blueprints to vRealize Automation 7, they are marked as 'Not Ready - blueprint is using Create workflow' after running a migration assessment. If the blueprint does not use the create workflow, you must open the blueprint in your source environment and save it without making any changes and rerun the migration assessment. After rerunning the assessment, the blueprint is marked as Ready. If the blueprint does use the create workflow, it cannot be migrated to vRealize Automation 8.

VMware Cloud Templates

When comparing your vRealize Automation 7 source to your new vRealize Automation 8 environment, the blueprint object types are different and are called VMware Cloud Templates.

Table 8-2. vRealize Automation 7 Blueprint Types to VMware Cloud Templates in vRealize Automation 8

Type	vRealize Automation 7	vRealize Automation 8.0
vSphere (vCenter) machine	Infrastructure.CatalogItem.Machine.Virtual.vSphere	Cloud.vSphere.Machine
AWS	Infrastructure.CatalogItem.Machine.Cloud.AmazonEC2	Cloud.AWS.EC2.Instance
Azure Machine		Cloud.Azure.Machine
Generic Virtual Machine	Infrastructure.CatalogItem.Machine.Virtual.Generic	Cloud.Machine
On-Demand Load Balancer (NSX)	Infrastructure.Network.LoadBalancer.NSX.OnDemand	Cloud.NSX.LoadBalancer
On-Demand Routed Network (NSX)	Infrastructure.Network.Network.NSX.OnDemand.Routed	Cloud.NSX.Network
NSX-T On-Demand Routed Network	Infrastructure.Network.Network.NSX.T.OnDemand.Routed	Cloud.NSX.Network
NSX-T On-Demand NAT Network	Infrastructure.Network.Network.NSX.T.OnDemand.NAT	Cloud.NSX.Network
Existing Network	Infrastructure.Network.Network.Existing	Cloud.vSphere.Network
On-Demand Private Network (NSX)	Infrastructure.Network.Network.NSX.OnDemand.Private	Cloud.NSX.Network


Custom Form Blueprints

Using the migration assistant tool, you can migrate Custom Form blueprints to vRealize Automation 8.

To migrate a custom form blueprint, first perform a migration assessment on your vRealize Automation 7 source instance, then on the **Infrastructure** tab select the business group that contains the custom form blueprint and click migrate.

After migrating, open Service Broker and click the **Content and Policies** tab. Click the three dot icon next to the migrated cloud template to view and customize the custom form related fields.

Also, validate that all external values from vRealize Orchestrator workflows are present along with any other expressions. If values or expressions are missing, rework the vRealize Orchestrator workflow.

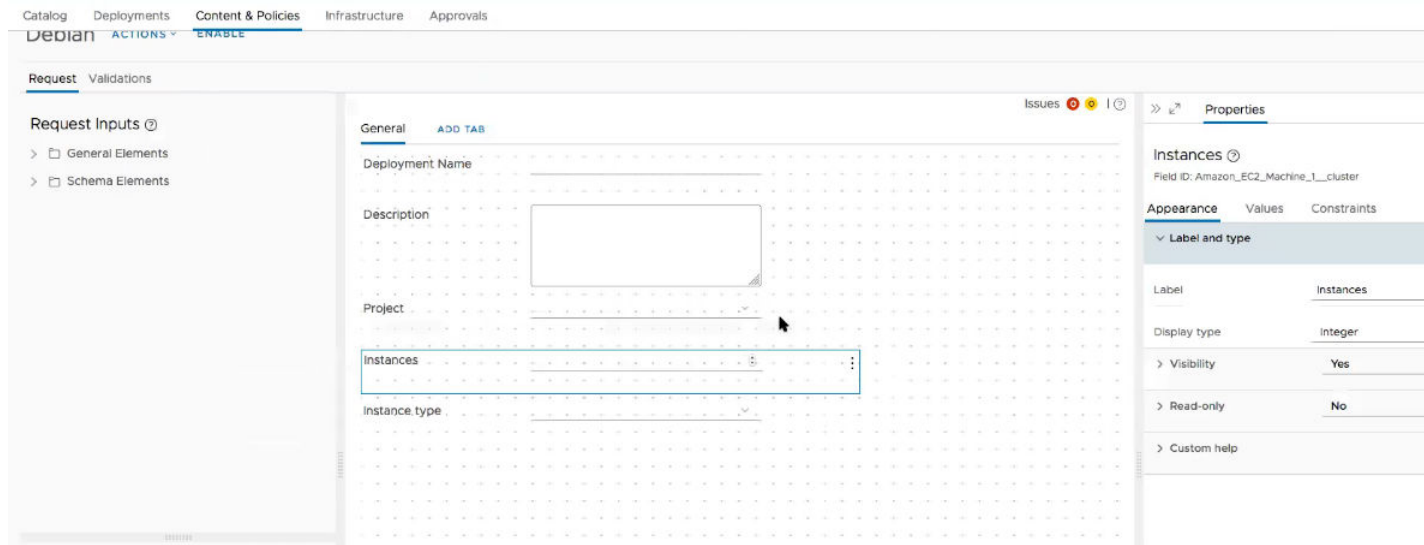

Component Profile Blueprints

Using the migration assistant tool, you can migrate component profile blueprints to vRealize Automation 8.

To migrate a component profile blueprint, first perform a migration assessment on your vRealize Automation 7 source instance, then on the **Infrastructure** tab select the business group that contains the component profile blueprint and click migrate.

After migrating, open Service Broker and click the **Catalog** tab. Click **Request** to view the component profile fields. For example, this migrated blueprint contains size and image fields populated with their vRealize Automation 7 values.

After migrating, verify the migrated template with the added inputs for sizes.

The screenshot shows the 'New Request' form in the vRealize Automation Service Broker interface. The form is titled 'New Request' and includes a 'Linux' logo and 'Version 1.0' dropdown. The form fields are: 'Deployment Name' (required), 'Description' (text area), 'Project' (dropdown menu with 'Sales' selected), 'vSphere__vCenter__Machine_1 Size' (dropdown menu with 'Medium' selected), and 'vSphere__vCenter__Machine_1 Image' (dropdown menu with 'Alpine' selected). At the bottom are 'SUBMIT' and 'CANCEL' buttons.

NSX Support

These NSX components are supported in VMware Cloud Templates.

Supported NSX Components

- NSX (T/V) On-Demand Routed Network
- NSX (T/V) On-Demand Nat Network
- NSX (T/V) On-Demand Load Balancer
- NSX (T/V) Existing Security Group
- NSX V On-Demand Private Network
- NSX V On-Demand Security Group

Unsupported NSX Components

- NSX (T/V) App Isolation
- NSX V Existing Security Tag

XaaS Considerations

XaaS Blueprints

XaaS blueprints are migrated into two different types of VMware Cloud Templates depending on their details.

Before you can migrate a XaaS blueprint, the associated workflow must be migrated to 8 first. vRealize Automation 8 supports:

- Request Form (Catalog item details and submitted request details are not supported)
- Search field on Request form
- Tree field on Request form
- Conditional default values only support a single condition. If conditions are nested, the conditions are ignored during migration.
- The read only, visible, minimum length, and maximum length constraints value only supports constant values.

vRealize Automation 8 no longer includes or supports the **Make Available as Component in Design Canvas** functionality.

Before migrating, if the associated workflow is not compatible with vRealize Automation 8, save the XaaS blueprint as a draft to continue the migration assessment and migration without it.

XaaS Blueprints Without a Defined Provision Resource

vRealize Automation 7 XaaS blueprints without a defined provision resource are migrated to vRealize Automation 8 as XaaS Cloud Templates with the associated workflow and original request form fields. You might need to reorder the fields, as the fields' order is not preserved post migration.

XaaS Blueprints with a Defined Provision Resource

vRealize Automation 7 XaaS blueprints with a defined provision resource are migrated to vRealize Automation 8 as VMware Cloud Templates along with the associated workflow and original request form. They are no longer listed as an XaaS blueprint. vRealize Automation 8 requires these XaaS blueprints to have an assigned update workflow and destroy workflow. If the XaaS blueprint does not contain one, vRealize Automation 8 assigns a dummy id to these workflow fields. You must replace the dummy id and assign an update and destroy workflow post migration.

Note The component lifecycle scalable functionality is not supported in vRealize Automation 8 and is flagged during the migration assessment.

Custom Resources

vRealize Automation 8 includes these custom resource considerations.

When migrating XaaS Custom Resources, only the original fields are migrated. Any user added fields or tabs are not migrated and must be added post migration. Any vRealize Automation 7 plugins used in your custom resources must also exist in vRealize Automation 8. If the custom resource contains a plugin that is not supported in vRealize Automation 8, you must unpublish the associated XaaS blueprint to exclude it from migration.

These plugins, fields, and views are not supported in vRealize Automation 8:

- VCAC/VCACCAFE plugin
- Resource List view
- Submitted Action details

Resource Mapping and Resource Actions

Resource mapping and resource actions are not supported because vRealize Automation 8 does not support their underlying vRealize Automation 7 components.

vRealize Automation 8 only includes an out-the-box workflow to map virtual machine types to orchestrator type VC:VirtualMachine in catalog resources.

Entitlement Considerations

vRealize Automation 8 includes these entitlement considerations.

When migrating from vRealize Automation 7.x to 8.8 or later, entitlements are migrated to a content sharing policy type by adding all associated catalog items as individual items instead of as a content source.

If your source instance includes existing entitlements with items added as an entitled service, the migration assistant identifies all the catalog items that belong to the service and creates a content sharing policy for every entitlement by adding them as individual items.

How are Entitled Actions mapped in vRealize Automation 8

vRealize Automation 8 uses built-in resource mapping for Entitled to Day 2 Policy actions.

During Migration, these entitled actions are mapped to these Day 2 Policy actions. All other entitled actions not listed in the table are currently not mapped during migration.

Table 8-3.

Type	vRealize Automation 7 Entitled Actions	vRealize Automation 8 Day 2 Policy Actions
Deployment	Change Lease	Deployment.ChangeLease
	Destroy	Deployment.Delete
Machine	Connect to Remote Console	Cloud.vSphere.Machine.Remote.Console

Table 8-3. (continued)

Type	vRealize Automation 7 Entitled Actions	vRealize Automation 8 Day 2 Policy Actions
	Power off	Cloud.vSphere.Machine.PowerOff Cloud.AWS.EC2.Instance.PowerOff Cloud.Azure.Machine.PowerOff
	Reboot	Cloud.vSphere.Machine.Reboot Cloud.AWS.EC2.Instance.Reboot
	Reconfigure	(Partially Supported) Cloud.vSphere.Machine.Add.Disk Cloud.vSphere.Machine.Remove.Disk Cloud.vSphere.Machine.Resize Cloud.vSphere.Machine.Compute.Disk.Resize Cloud.Azure.Machine.Add.Disk Cloud.Azure.Machine.Remove.Disk Cloud.Azure.Machine.Resize Cloud.AWS.EC2.Instance.Add.Disk Cloud.AWS.EC2.Instance.Remove.Disk Cloud.AWS.EC2.Instance.Resize Cloud.AWS.EC2.Instance.Compute.Disk.Resize
	Shutdown	Cloud.vSphere.Machine.Shutdown
	Suspend	Cloud.vSphere.Machine.Suspend Cloud.Azure.Machine.Suspend
Virtual Machine	Create Snapshot	Cloud.vSphere.Machine.Snapshot.Create
	Delete Snapshot	Cloud.vSphere.Machine.Snapshot.Delete
	Revert to Snapshot	Cloud.vSphere.Machine.Snapshot.Revert
Cloud Machine	Destroy	Cloud.Azure.Machine.Delete Cloud.AWS.EC2.Instance.Delete
Azure Virtual Machine	Delete	Cloud.Azure.Machine.Delete
	Restart	Cloud.Azure.Machine.Restart
	Start	Cloud.Azure.Machine.PowerOn
	Stop	Cloud.Azure.Machine.PowerOff
VMware NSX Security Group	Reconfigure	Cloud.NSX.LoadBalancer.LoadBalancer.Reconfigure Cloud.LoadBalancer.LoadBalancer.Reconfigure

Endpoint Considerations

vRealize Automation 8 includes these endpoint considerations.

vRealize Automation 8 supports these endpoints:

Table 8-4. vRealize Automation 8 Supported Endpoints

Endpoint	Added as ...
Azure	Added as a cloud account.
AWS	Added as a cloud account
Google Cloud Platform	Added as a cloud account
vCenter	Added as a cloud account
NSX-T	Added as a cloud account
NSX-V	Added as a cloud account
Puppet	Added as an integration account Note You cannot migrate Puppet endpoints to vRealize Automation 8. However, vRealize Automation 8 does support adding Puppet endpoints as integrations post-migration or installation.
Ansible	Added as an integration account Note You cannot migrate Ansible endpoints to vRealize Automation 8. However, vRealize Automation 8 does support adding Ansible endpoints as integrations post-migration or installation.
IPAM	Added as an integration account
vRealize Orchestrator	Added as an integration account

vRealize Automation 8 does not support these endpoints:

- Hyper-V (standalone)
- Hyper-V (SCVMM)
- KVM (RHEV)
- NetApp ONTAP
- Openstack
- Proxy
- vCloud Air
- vCloud Director
- vROPs

- XenServer

Infoblox IPAM

Before migrating an Infoblox endpoint, you must first install the latest Infoblox plugin for vRealize Automation 8 from the Marketplace in your target vRealize Automation 8 environment. vRealize Automation 8 also requires you to select an address space. Migration fails if you attempt to migrate a profile without a selected address space.

vRealize Automation 8 does not support or migrate these properties/property groups:

- Infoblox.IPAM.createFixedAddress
- Infoblox.IPAM.createAddressAndPtrRecords
- Infoblox.IPAM.NetworkO.enableDhcp
- Infoblox.IPAM.NetworkO.aliases
- Infoblox.IPAM.createReservation
- Infoblox.IPAM.NetworkO.msDhcpServer
- Infoblox.IPAM.NetworkO.comment
- Infoblox.IPAM.createAddressRecord
- Infoblox.IPAM.NetworkO.enableDns
- Infoblox.IPAM.CustomHostname.ConditionalMachineCustomPropertyO.Value
- Infoblox.IPAM.enableCustomHostname
- Infoblox.IPAM.NetworkO.dnsView
- Infoblox.IPAM.CustomHostame.ConditionalMachineCustomPropertyO.Name
- Infoblox.IPAM.restartIfNeeded
- Infoblox.IPAM.createHostRecord

Approval Policy Considerations

vRealize Automation 8 includes these approval policy considerations.

Approval policies in vRealize Automation 8 do not support:

- Post Levels
- Multi Levels
- Nested Criteria
- AP integration with Event Subscriptions
- Approver determination based on Requests
- Approver Groups

■ Approvals by Email

You can only use cost, requestedBy, cpucount, and memory criteria fields in your vRealize Automation 8 approval policies.

When migrating your vRealize Automation 7 approval policies to vRealize Automation 8, they are migrated as either Catalog Requests or Day 2 Action Request types.

Table 8-5. Catalog Request

vRealize Automation 7 Catalog Request Type	vRealize Automation 8 Type
Service Catalog - Catalog Item Request	Deployment.Create
Service Catalog - Catalog Item Request - Virtual Machine	Deployment.Create (resourceType = Cloud.vSphere.Machine)
Service Catalog - Catalog Item Request - Cloud Machine	Deployment.Create (resourceType = Cloud.AWS.EC2.Instance)
Service Catalog - Catalog Item Request - Existing Network	Deployment.Create (resourceType = Cloud.vSphere.Network)
Service Catalog - Catalog Item Request - NSX-T On-Demand Load Balancer	Deployment.Create (resourceType = Cloud.NSX.LoadBalancer)
Service Catalog - Catalog Item Request - NSX-T Existing NS Group	Deployment.Create (resourceType = Cloud.SecurityGroup)
Service Catalog - Catalog Item Request - NSX-T On-Demand Nat Network	Deployment.Create (resourceType = Cloud.NSX.Network)
Service Catalog - Catalog Item Request - NSX-T On-Demand Routed Network	Deployment.Create (resourceType = Cloud.NSX.Network)
Service Catalog - Catalog Item Request - Existing Security Group	Deployment.Create (resourceType = Cloud.SecurityGroup)
Service Catalog - Catalog Item Request - On-Demand Routed Network	Deployment.Create (resourceType = Cloud.NSX.Network)
Service Catalog - Catalog Item Request - On-Demand Private Network	Deployment.Create (resourceType = Cloud.NSX.Network)
Service Catalog - Catalog Item Request - On-Demand Load Balancer	Deployment.Create (resourceType = Cloud.NSX.Network)

Table 8-5. Catalog Request (continued)

vRealize Automation 7 Catalog Request Type	vRealize Automation 8 Type
Service Catalog - Catalog Item Request - On-Demand NAT Network	Deployment.Create (resourceType = Cloud.NSX.Network)
Service Catalog - Catalog Item Request - Puppet Service Catalog - Catalog Item Request - XaaS Blueprint Service Catalog - Catalog Item Request - Software Component Service Catalog - Catalog Item Request - Ansible Service Catalog - Catalog Item Request - Composite Blueprint Service Catalog - Catalog Item Request - Existing Security Tag Service Catalog - Catalog Item Request - Container Service Catalog - Catalog Item Request - Container Network Service Catalog - Catalog Item Request - Container Volume	Not Supported

Table 8-6. Day 2 Action Requests

vRealize Automation 7 Action Type	vRealize Automation 8 Action Type
Resource Action Request - Change Lease - Deployment	Deployment.ChangeLease
Resource Action Request - Change Security - Deployment	Cloud.vSphere.Machine.Change.SecurityGroup
Resource Action Request - Create Snapshot - Virtual Machine	Cloud.vSphere.Machine.Snapshot.Create
Resource Action Request - Revert To Snapshot - Virtual Machine	Cloud.vSphere.Machine.Snapshot.Revert
Resource Action Request - Delete Snapshot - Virtual Machine	Cloud.vSphere.Machine.Snapshot.Delete
Resource Action Request - Delete - Azure Virtual Machine	Cloud.Azure.Machine.Delete
Resource Action Request - Destroy - Cloud Machine	Cloud.AWS.EC2.Instance.Delete
Resource Action Request - Destroy - Deployment	Deployment.Delete
Resource Action Request - Destroy - Virtual Machine	Cloud.vSphere.Machine.Delete
Resource Action Request - Power Off - Machine	Cloud.vSphere.Machine.PowerOff Cloud.AWS.EC2.Instance.PowerOff
Resource Action Request - Power On - Machine	Cloud.vSphere.Machine.PowerOn Cloud.AWS.EC2.Instance.PowerOff
Resource Action Request - Reboot - Machine	Cloud.AWS.EC2.Instance.Reboot Cloud.vSphere.Machine.Reboot
Resource Action Request - Reconfigure - VMware NSX Load Balancer	Cloud.NSX.LoadBalancer.LoadBalancer.Reconfigure

Table 8-6. Day 2 Action Requests (continued)

vRealize Automation 7 Action Type	vRealize Automation 8 Action Type
Resource Action Request - Reprovision - Machine	Cloud.AWS.EC2.Instance.Reprovision Cloud.vSphere.Machine.Reprovision
Resource Action Request - Restart - Azure Virtual Machine	Cloud.Azure.Machine.Restart
Resource Action Request - Shutdown - Machine	Cloud.vSphere.Machine.Shutdown
Resource Action Request - Start - Azure Virtual Machine	Cloud.Azure.Machine.PowerOn
Resource Action Request - Stop - Azure Virtual Machine	Cloud.Azure.Machine.PowerOff
Resource Action Request - Suspend - Machine	Cloud.vSphere.Machine.Suspend

Table 8-6. Day 2 Action Requests (continued)

vRealize Automation 7 Action Type	vRealize Automation 8 Action Type
Resource Action Request - Change Lease - Machine	Not Supported
Resource Action Request - Cancel Reconfigure - Machine	
Service Catalog - Resource Action Request	
Resource Action Request - Change NAT Rules - VMware NSX Network	
Resource Action Request - Change NAT Rules - VMware NSX-T Network	
Resource Action Request - Change Owner - Deployment	
Resource Action Request - Destroy - Container	
Resource Action Request - Destroy - Container Network	
Resource Action Request - Destroy Volume - Container Volume	
Resource Action Request - Execute Reconfigure - Machine	
Resource Action Request - Expire - Deployment	
Resource Action Request - Expire - Machine	
Resource Action Request - Install Tools - Machine	
Resource Action Request - Manage Public IP Address - Azure Virtual Machine	
Resource Action Request - Power Cycle - Machine	
Resource Action Request - Reconfigure - Machine	
Resource Action Request - Register VDI - Virtual Machine	
Resource Action Request - Remove from Catalog - Azure Virtual Machine	
Resource Action Request - Resume - Deployment	
Resource Action Request - Scale In - Deployment	
Resource Action Request - Scale Out - Deployment	
Resource Action Request - Start - Container	
Resource Action Request - Stop - Container	
Resource Action Request - Unregister - Machine	
Resource Action Request - Unregister VDI - Virtual Machine	
Resource Action Request - Unregister - VMware NSX Network	
Resource Action Request - Unregister - VMware NSX-T Network	

Networking Considerations

vRealize Automation 8 includes these NSX, Load Balancer, and Security Group considerations.

NSX (T/V) Considerations

Note These considerations only apply to vSphere Networking with NSX.

The vRealize Automation 8 Migration Assistant does not support blueprints with a private network component that do not contain a private network profile for migration.

In vRealize Automation 8, every on-demand NSX-T network creates a new Tier-1 logical router, and every on-demand NSX-V network creates a new Edge.

When migrating NSX components from vRealize Automation 7 to vRealize Automation 8, they are renamed.

Table 8-7. Blueprint Components

vRealize Automation 7 Component	vRealize Automation 8 Component
NSX-(V/T) On-Demand Nat Network	Cloud.NSX.Network (networkType: outbound) + Cloud.NSX.Gateway (Only if Nat rules specified in 7 BP)
NSX-(V/T) On-Demand Routed Network	Cloud.NSX.Network (networkType: routed)
NSX-(V/T) On-Demand LB	Cloud.NSX.LoadBalancer
NSX-V On-Demand Private Network	Cloud.NSX.Network (networkType: private)
NSX-(V/T) Existing Security Group	Cloud.SecurityGroup
Existing Network	Cloud.vSphere.Network
NSX-V On-Demand Security Group NSX-V Existing Security Tag	Not Supported.

Table 8-8. Deployment Components

vRealize Automation 7 Component	vRealize Automation 8 Component
NSX-(V/T) On-Demand Nat Network	Network Component (networkType: outbound)
NSX-(V/T) On-Demand Routed Network	Network Component (networkType: routed)
NSX-(V/T) On-Demand LB	Cloud.NSX.LoadBalancer
NSX-V On-Demand Private Network	Network Component (networkType: private)
NSX-(V/T) Security Group	SecurityGroup Component (type : Existing)
Existing Network	Network Component (networkType: existing)

Table 8-9. Endpoint Mapping

vRealize Automation 7 Endpoint	vRealize Automation 8 Endpoint
NSX-V	NSX-V Note The NSX-V endpoint is linked to vCenter.
NSX-T	NSX-T Note The NSX-T endpoint is linked to vCenter (1:N Mappings).
NSX-T and NSX-V	vCenter (Hybrid) Note All 3 endpoints are migrated but only the NSX-T endpoint is linked with VC. If needed, you must manually create additional links.

Network Profiles

If your vRealize Automation 7 source environment contains both reservations and a network profile, they are merged during migration into one Network Profile in vRealize Automation 8.

Table 8-10. Network Profile Conversion

Name	vRealize Automation 7	vRealize Automation 8
External Profile	Assigned to Network in the Reservation	Equivalent CIDR is set on the 8.x subnet. Ip Ranges are set on the subnet.
Routed Profile	Linked to External Profile. External Profile is set on the DLR or Tier -0 Logical Router in Reservation.	A Separate Network Profile with Isolation Type as Subnet is created. The equivalent CIDR (of vRealize Automation 7 routed profile) and subnet is determined and set in the NP. Subnet size is determined by the vRealize Automation 7 subnet mask.

Table 8-10. Network Profile Conversion (continued)

Name	vRealize Automation 7	vRealize Automation 8
Nat Profile	Linked to External Profile. External Profile is set on the DLR or Tier -0 Logical Router in Reservation.	A Separate Network Profile with Isolation Type as Subnet is created. The equivalent CIDR (of 7 vRealize Automation nat profile) and subnet is determined and set in the NP. By default, the subnet size is 29. If vRealize Automation 7 has both DHCP enabled and static IP ranges, vRealize Automation 8 assigns DHCP and Static as the IP range.
Private Profile	Linked to External Profile. External Profile is set on the DLR or Tier -0 Logical Router in Reservation.	A Separate Network Profile with Isolation Type as Subnet is created. The equivalent CIDR (of 7 vRealize Automation private profile) and subnet is determined and set in the NP. By default, the subnet size is 29.

Note External IPAM is supported for all network profiles. However, the CIDR is not set and the IP blocks of the IPAM are set as ranges.

When creating Network Profiles, you must select the address space and existing IP blocks.

NAT Network Profile with Third-Party IPAM

In vRealize Automation 7, you didn't need to select the address space. Only the IP ranges were specified in the Network Profile. During deployment, a new on-demand address space was created and IP range set.

In vRealize Automation 8, when creating a Network Profile you must select the address space and existing IP blocks.

Security Groups

In vRealize Automation 8, Security Groups are linked only if you have a Network component. During Blueprint/Deployment migration, a network component is created by default when a VM is not attached to a Network Component.

For vRealize Automation 7 blueprints, the static IP is assigned to the NIC without having to link a network component. During migration to vRealize Automation 8, a default network component is created for these blueprints.

Azure Networking

vRealize Automation 8 supports Azure blueprints with these components:

- With Security Groups.

- With vNET and Subnet

Note vRealize Automation 8 does not support Azure blueprints with load balancers. You must create a new load balancer.

Reservation Considerations

vRealize Automation 8 includes these reservation considerations.

In vRealize Automation 8, reservations use cloud zones for compute policies, storage profiles to storage policies, and network profiles for network policies. These constructs are linked together using tags. In vRealize Automation 8, cloud zones are linked to one or more projects.

During reservation migration:

- 1 The compute components are migrated as a cloud zone and assigned a tag.
- 2 The storage components are migrated as one or more storage profiles and assigned the previously created tag.
- 3 The network components are migrated as a network profile and assigned the previously created tag.
- 4 The cloud zone is attached to the project.

Note If the reservation contains a reservation policy, a capability tag is also assigned to the cloud zone to represent the policy post migration.

vRealize Automation 8 also introduces default storage profiles. When a migrated reservation contains multiple storage profiles, vRealize Automation 8 assigns one as a default storage profile. Before provisioning, ensure that the correct storage profile is selected as default. If it is not, select the check box next to the desired storage profile under the reservation.

Note In vRealize Automation 7, Amazon reservations cannot configure storage placement policies. In vRealize Automation 8, the migration assistant tool does not create storage profiles during Amazon reservation migrations.

Note Only enabled storage paths are migrated to vRealize Automation 8. Disabled storage paths are not migrated to vRealize Automation 8.

Optimized Reservations

During migration, reservations are consolidated into fewer cloud zones.

Reservations are consolidated into as few cloud zones, storage profiles, and network profiles as possible based on their computations to optimize them. For example, if you have five reservations using the same compute resource, they are migrated and consolidated into a single cloud zone in vRealize Automation 8.

- Multiple reservations that use the same compute resource are migrated as a single cloud zone.

- Multiple reservations that use the same storage paths are migrated as a single storage profile.
- Multiple reservations that use the same networks are migrated as a single network profile.

Custom Properties Considerations

vRealize Automation 8 includes these custom properties considerations.

During blueprint migration, these custom properties are migrated as Input property parameters and linked to the Cloud Template component field.

- VirtualMachine.CPU.Count
- VirtualMachine.Memory.Size
- VirtualMachine.NetworkN.PrimaryDNS
- VirtualMachine.NetworkN.SecondaryDNS
- VirtualMachine.NetworkN.Gateways
- VirtualMachine.NetworkN.DnsSuffix
- VirtualMachine.NetworkN.DnsSearchSuffixes
- VirtualMachine.NetworkN.Address
- VirtualMachine.NetworkN.AddressType
- VirtualMachine.NetworkN.NetworkProfileName
- VirtualMachine.NetworkN.ProfileName
- VirtualMachine.NetworkN.SubnetMask
- Custom properties attached to a deployment resource. These custom properties are migrated with their 7.x properties that might not work or be relevant in vRealize Automation 8.

All other custom properties are migrated as part of the Cloud Template schema.

Each property defined in VMware Cloud Templates supports string, boolean, decimal, object, array, and number types.

Property Group Considerations

vRealize Automation 8 includes these property group considerations.

A property group is a group of custom properties that you can use to customize your Cloud Template. When migrating property groups from vRealize Automation 7.x to vRealize Automation 8.x, review these considerations:

- In vRA 7.x, a property group could be linked to a single tenant or shared across tenants. In vRA 8.x, these property groups are migrated and linked to a single tenant and the name of the tenant is added to the property group name: <propertygroupname>_<tenantname>. If a group is shared across tenants, in vRA 8.x it is migrated as is and without any changes to its name.

- Property groups containing constant properties (show in request: false) are migrated as constant type property groups: <propertygroupname>_constants. Property groups containing editable properties (show in request: true) are migrated as input type property groups: <propertygroupname>_inputs. During migration, if a property group contains both constant and editable properties the property group is split into two property groups: <propertygroupA>_constants and <propertygroupA>_inputs.
- If your vRealize Automation 8.x environment contains a property group with the same name as one being migrated, the migrated property group name is amended with a random number: <propertygroupname>_3439553.
- vRealize Automation 8 does not support the use of "-" and "." characters in property names. During migration these characters are replaced with the "_" character.
- Custom properties directly on Cloud Templates or components take precedence over property groups.
- vRealize Automation 8.x supports all property data types. However, vRealize Automation does not support all functionality within those data types. The unsupported functionality is flagged in the migration assessment report.
- vRealize Automation 8.x does not support dropdowns populated by vRO actions. You must manually define the dropdown values as constants.
- vRealize Automation 8.x does not support migrating the display order for properties.

Table 8-11. Supported Property Group Attributes

Attribute in vRA 7.x	vRA 8.x Mapping
Property Group Attributes	
Name	Display Name
ID	Name
Visibility: all tenants	N/A
Visibility: this tenant	Visibility: this tenant
Description	Description
Property Group Property Attributes	
Name	Name
Value	Default Value
Encrypted	Encrypted
Show in request: true	Created as part of an input type property group. If a property definition exists for this property, the definition is applied.

Table 8-11. Supported Property Group Attributes (continued)

Attribute in vRA 7.x		vRA 8.x Mapping
Show in request: false		Created as part of a constant type property group. If a property definition exists for this property, the definition is ignored.
Property Definition Attributes		
Name		Name
Label		Display Name
Visibility: all tenants		N/A
Visibility: this tenant		Visibility: this tenant
Description		Description
Display Order		N/A
Property Definition Data Type Attributes		
Boolean	Display as: checkbox	Display as: checkbox
	Display as: Yes/No	N/A
Datetime	Required: Yes Required: No	Required: Yes Required: No
	Minimum value Maximum value	N/A
	Display as: Date Time Picker	N/A
Decimal	Required: Yes Required: No	N/A
	Minimum value Maximum value	Minimum value Maximum value
	Increment	N/A
	Display as: Dropdown/static list/ enable custom value entry: true/ static list: true	N/A
	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true
	Display as: Dropdown/ external values	N/A
	Display as: Slider	N/A
	Display as: Textbox	Display as: Textbox

Table 8-11. Supported Property Group Attributes (continued)

Attribute in vRA 7.x		vRA 8.x Mapping
Integer	Required: Yes	N/A
	Required: No	
	Minimum value Maximum value	Minimum value Maximum value
	Increment	N/A
	Display as: Dropdown/static list/ enable custom value entry: true/ static list: true	N/A
	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true
	Display as: Dropdown/external values	N/A
	Display as: Slider	N/A
	Display as: Textbox	Display as: Textbox
Secure String	Required: Yes	Required: Yes
	Required: No	Required: No
	Display as: Password that requires confirmation	N/A
	Display as: Textbox with validation	Display as: Textbox with validation
String	Display as: Textbox without validation	Display as: Textbox without validation
	Required: Yes	Required: Yes
	Required: No	Required: No
	Display as: Dropdown/static list/ enable custom value entry: true/ static list: true	N/A
	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true	Display as: Dropdown/static list/ enable custom value entry: false/ static list: true
	Display as: Dropdown/external values	N/A
	Display as: Email	N/A
	Display as: Hyperlink	N/A
	Display as: Textarea	N/A
	Display as: Textbox with validation	Display as: Textbox with validation
	Display as: Textbox without validation	Display as: Textbox without validation

Multi-Tenancy Considerations

vRealize Automation 8 includes these multi-tenancy considerations.

When migrating multiple tenants to a single tenant in vRealize Automation 8, consider:

- Subscriptions - When a second subscription with the same name as an existing subscription is migrated, the conditions and workflows are updated according to the second subscription criteria.
- Blueprint - When migrating a second blueprint with the same name from another tenant, the blueprint is skipped and the first migrated blueprint is shared between the business groups of both tenants.
- CustomResource - When migrating the first custom resource, the migration assistant creates the create, update, destroy workflow, and Day 2 actions (if applicable) criteria. If you migrate a second custom resource with the same name, only the Day 2 actions are updated.

Migrating vRealize Automation 7 Subscriptions

9

After running a migration assessment on your vRealize Automation 7 source environment, you can migrate individual subscriptions to vRealize Automation 8.


The subscriptions results of your migration assessment are listed on the **Migration > Subscriptions** tab. All assessed subscriptions are listed with their status:

- Ready - Subscription is ready for migration. No action is needed for migration readiness.
- Ready with warnings - Subscription is ready but needs review. Remediate any issues that might impact migration.
- Not ready - Subscription is not ready for migration. Review details of the subscription in your source environment and correct areas needing attention.
- Assessing - Subscription is still being assessed for migration readiness.
- Assessment failed - The assessment failed, retry assessment.

If applicable, after modifying any subscriptions listed as not ready or ready with warnings, select the subscription and click **Update** to update its status in the assessment results table. The assessment report also flags which subscription conditions are not supported. Before you can migrate these subscriptions, you must correct the unsupported conditions and reassess the subscription.

The screenshot shows the vRealize Automation - Migration Assessment interface. On the left is a navigation sidebar with options: Getting Started, Source Instances, Assessment (selected), Infrastructure, Subscriptions, Deployments, and Configuration. The main area is titled 'Subscriptions' and includes a 'Select subscription to migrate.' prompt. Below this are three buttons: MIGRATE, ROLLBACK, and UPDATE. A 'Filter...' link is also present. The main content is a table with columns: Name, Status, Source Account, and Tenant. The table lists several subscriptions, all with a status of 'Ready' (indicated by a blue circle with a right arrow). The subscription 'Valid-DeploymentAction-Completed' is selected, indicated by a blue checkmark in the first column.

<input type="checkbox"/>	Name	Status	Source Account	Tenant
<input type="checkbox"/>	Valid-BlueprintCompleted-Conditions	Ready	cava-n-88-198.eng.vmware.com	QETenant
<input type="checkbox"/>	Valid-BlueprintConfig-Condition	Ready	cava-n-88-198.eng.vmware.com	QETenant
<input type="checkbox"/>	Valid-ComponentActionCompleted-Condition	Ready	cava-n-88-198.eng.vmware.com	QETenant
<input checked="" type="checkbox"/>	Valid-DeploymentAction-Completed	Ready	cava-n-88-198.eng.vmware.com	QETenant
<input type="checkbox"/>	Valid-Machine-And-Condition	Ready	cava-n-88-198.eng.vmware.com	QETenant

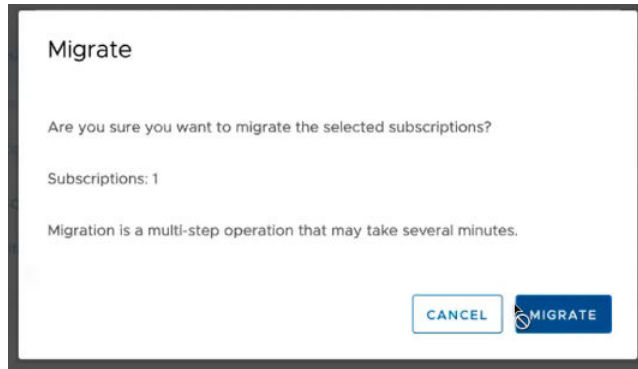

To migrate subscriptions, select one or more subscriptions with a ready or ready with warnings status and click migrate.

Note Before you can migrate a subscription, you must have at least one migrated business group in vRealize Automation 8 first. If a subscription has dependencies on vRO workflows, it will fail to migrate until these dependencies are migrated first.

After migrating, you can click the subscription name to view its assessment and migration results and status:

- Migrating - Subscription is being migrated.
- Migrated - Migration is complete and successful. You can view and use the migrated subscription in your vRealize Automation 8 environment.
- Failed - The migration failed. Review the subscription in your source environment, modify as needed, retry migration.
- Excluded - Subscription that was listed as Not ready was migrated but its not ready items were not migrated and are listed as excluded.

Migrated subscriptions are listed in **Cloud Assembly > Extensibility**. On the Extensibility tab, when you open a migrated subscription, the associated conditions and IDs are listed.

Note If a vRealize Automation 7 subscription contains an "or" condition, the subscription is migrated into two vRealize Automation 8 subscriptions in which both send the event to the same workflow.

You can roll back previously migrated subscriptions by selecting the migrated subscription and clicking rollback.

Note If you modify any migrated items and then rollback, all edits post-migration are deleted.

This chapter includes the following topics:

- [Subscription Mapping and Considerations](#)

Subscription Mapping and Considerations

When migrating from vRealize Automation 7 to vRealize Automation 8, subscriptions are mapped and supported differently.

To learn how to use your vRealize Automation 7 subscriptions with vRealize Automation 8, review the mapping table.

Table 9-1. vRealize Automation 8 Subscription Mapping

vRealize Automation 7 Subscription	In vRealize Automation 8, becomes ...	Considerations
Blueprint component completed	Deployment resource completed	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ componentId ■ blueprintId ■ deploymentId
Blueprint component requested	Deployment resource requested	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ componentId ■ blueprintId ■ deploymentId
Blueprint configuration	Blueprint configuration	Supported Condition in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId Supported Schema: <ul style="list-style-type: none"> ■ name ■ eventType ■ status ■ id ■ description
Blueprint request completed	Deployment completed	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId ■ deploymentId
Blueprint requested	Deployment requested	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId ■ deploymentId
Catalog request completed	Deployment completed	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId ■ deploymentId
Catalog request received	Deployment requested	N/A

Table 9-1. vRealize Automation 8 Subscription Mapping (continued)

vRealize Automation 7 Subscription	In vRealize Automation 8, becomes ...	Considerations
Component action completed	Deployment resource action completed	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ componentId ■ blueprintId ■ deploymentId
Component action requested	Deployment resource action requested	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ componentId ■ blueprintId ■ deploymentId
Deployment action completed	Deployment action completed (deployment.action.post)	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId ■ deploymentId Supported Schema: <ul style="list-style-type: none"> ■ actionName ■ deploymentId ■ statusId ■ failureMessage
Deployment action requested	Deployment action requested (deployment.action.pre)	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ blueprintId ■ deploymentId Supported Schema: <ul style="list-style-type: none"> ■ actionName ■ deploymentId ■ id
EventLog default event	EventLog (broker.event.log)	N/A
Machine Provisioning	Lifecycle state events For more information on specific lifecycle states and event topics, refer to the lifecycle state events table below.	Supported Conditions in vRealize Automation 8: <ul style="list-style-type: none"> ■ lifecycleState ■ componentId ■ blueprintName ■ componentTypeId ■ endpointId

Lifecycle state events

Machine Provisioning vRealize Automation 7 subscriptions are converted to lifecycle state events subscriptions in vRealize Automation 8 that support various states, events, and event topics.

Table 9-2.

State	Events	Event Topic
VMPSMasterWorkflow32		
Building Machine		Compute provision
DeactivateMachine		Compute removal
Disposing	<ul style="list-style-type: none"> ■ OnDisposeComplete (Provision) ■ OnDisposeTimeout (Provision) ■ OnUnregisterMachine (Provision) 	Compute removal
MachineActivated	OnCatalogRegistrationComplete (Provision)	Compute Post Provision
MachineProvisioned		Compute Post Provision
Requested	OnProvisionMachine (Provision)	Compute provision
UnprovisionMachine		Computer removal
WaitingToBuild		Compute provision
Clone Workflow		
BuildComplete		Compute Post Provision
CloneMachine	<ul style="list-style-type: none"> ■ OnCloneMachineComplete ■ OnCloneMachineTimeout 	Compute Provision
CustomizeMachine	<ul style="list-style-type: none"> ■ OnCustomizeMachineComplete ■ OnCustomizeMachineTimeout 	Compute Provision
CustomizeOS	<ul style="list-style-type: none"> ■ OnCustomizeOS ■ OnCustomizeOSComplete ■ OnCustomizeOSTimeout 	Compute Provision

Migrating vRealize Automation 7 Deployments

10

After running a migration assessment on your vRealize Automation 7 source environment, you can migrate deployments to vRealize Automation 8.

The results of your business groups' deployments migration assessment are listed on the **Migration > Deployments** tab. All assessed deployments are listed with their status:

- **Ready** - Deployment is ready for migration. No action is needed for migration readiness.
- **Ready with warnings** - Deployment is ready but needs review. Remediate any issues that might impact migration.
- **Not ready** - Deployment is not ready for migration. Review details of the deployment in your source environment and correct areas needing attention.
- **Assessing** - Deployment is still being assessed for migration readiness.
- **Assessment failed** - The assessment failed, retry assessment.

If applicable, after modifying any deployments, to re-assess your deployments select the business group and click **Update** to update its status in the assessment results table.

Note You can only migrate deployments after successfully migrating the associated business group to vRealize Automation 8, regardless of deployment assessment status.

Required: Before migrating your deployments, you must take a snapshot of your vRealize Automation 8 environment.

To migrate deployments, select one or more business groups under the **Deployments** tab with any status and click migrate. Deployments that are Not ready are excluded from migration.

Note Migration of a deployment is final regardless of whether it succeeded or failed. You cannot retry a deployment migration.

After migrating, you can click the business group's name to view its deployments assessment and migration results and status:

- **Migrating** - Deployment is being migrated.
- **Migrated** - Deployment was migrated successfully. You can view and use the migrated deployment in your vRealize Automation 8 environment.
- **Failed** - Deployment failed to migrate.

- Excluded - Deployment was excluded from migration because it was Not ready.

Before you can migrate a deployment of a specific business group, the business group infrastructure must be migrated first. The status of the infrastructure migration is also shown on the **Migration > Deployments** tab.

This chapter includes the following topics:

- [Deployment Considerations](#)
- [NSX Deployment On-Boarding Support](#)

Deployment Considerations

Deployment migration is a three-step process that involves migrating infrastructure deployment components, migrating XaaS deployment components, and customizing migrated deployments.

Migrate Infrastructure Deployment Components

vRealize Automation provisions Infrastructure components on Cloud providers. Migrating infrastructure components uses the vRealize Automation 8 Onboarding feature and consists of two parts:

- Resource Tagging
 - Migrating vRealize Automation 7 endpoints creates vRealize Automation 8 Cloud Accounts and triggers data collection against the Cloud providers the legacy endpoints represent. Migration uses the source deployments to locate and tag matching resources in vRealize Automation 8 with the necessary data to onboard them for vRealize Automation 8 management.
- Resource Onboarding
 - Migration creates an onboarding plan (one per business group) and a specific onboarding rule to link the relevant tagged resources to the plan and reconstruct the deployment/component hierarchy as it exists vRealize Automation 7. Once the plan is complete, the Migration Assistant uses it to migrate source deployments.

Migrate XaaS Deployment Components

The Migration Assistant manages XaaS components separately from Infrastructure:

- If your deployments only contain XaaS components, the Migration Assistant migrates the deployment and all its XaaS components.
- If your deployment contains both Infrastructure and XaaS components, the Migration Assistant identifies the target deployment that was created during onboarding and moves all the XaaS components to it.

Note If attempted, rerunning the onboarding plan created by the Migration Assistant retries onboarding for the infrastructure components only. It does not re-trigger migration for XaaS deployment components or deployment customizations.

Customize Migrated Deployments

This last step fine tunes the migrated deployments by applying these customizations in this order:

- 1 Set the deployment name and description. Unlike vRealize Automation 7, vRealize Automation 8 does not allow deployments with identical names. During migration, the Migration Assistant enforces unique names when migrating deployment containers.
- 2 Set the deployment lease.
- 3 Replicate deployment request history in Cloud Assembly.
- 4 Set deployment owner. vRealize Automation 8 includes a deployment owner limitation. See [Deployment Limitations](#) for more information. This customization actually saves the deployment owner details in the deployment resource metadata for record.

Deployment Considerations

vRealize Automation 8 Migration Assistant includes these additional deployment considerations.

- During deployment migration, the compute processing consumes project placement quota. Ensure you have enough placement quota before migrating your deployments by navigating to **Cloud Assembly > Infrastructure > Project > Provisioning**. Each cloud zone is shown with its limits.
- After migrating deployments, the deployments are active in both your source environment and vRealize Automation 8 environment. To prevent the machine from accidentally being deleted or destroyed, remove the user from your vRealize Automation 7 business group and modify the deployment's lease to never expire in your source environment.
- If you migrate your source infrastructure and attempt to migrate your deployments, the deployment migration might fail. If your deployment migration fails, rerun the onboarding plan. [Learn more about Onboarding Plans](#).

NSX Deployment On-Boarding Support

These NSX components are supported during Deployment On-Boarding.

Supported NSX Components

- NSX (T/V) On-Demand Routed Network
- NSX (T/V) On-Demand Nat Network
- NSX (T/V) External Network
- NSX (T/V) Existing Security Group
- NSX V On-Demand Private Network
- NSX (T/V) App Isolation. This becomes an existing security group.
- NSX V On-Demand Security Group. This becomes an existing security group.

- NSX (T/V) On-Demand Load Balancer

Note If any NAT rules are specified on the network, they are not set on the onboarded network component. Also, if your external network is not attached to a VM in your source deployment it is not onboarded.

Migrating vRealize Orchestrator

11

You can migrate your existing vRealize Orchestrator that is embedded in a vRealize Automation 7.x environment to an embedded vRealize Orchestrator 8.x.

Migration is supported for vRealize Orchestrator 7.3 or later.

The vRealize Orchestrator migration transfers an embedded source vRealize Orchestrator configuration to your current vRealize Orchestrator 8.x environment, overwriting all existing elements such as workflows, actions, configuration and resource elements, including secure strings in workflows and configuration elements, packages, tasks, policies, certificates and trusted certificates, plug-ins and plug-in configurations, custom records in the `the js-io-rights.conf` file, Control Center system properties. The migration includes both built-in and custom vRealize Orchestrator content.

The migrated vRealize Orchestrator configuration does not include the following data that might affect the target vRealize Orchestrator performance and use.

- The VCAC, VCACCAFE, GEF, Data Management, and Workflow Documentation plug-ins of the source vRealize Orchestrator. Aside from workflow runs, all vRealize Orchestrator content associated with these plug-ins is not migrated to the target environment.
- Syslog server configuration in the **Logging Integration** page in Control Center.
- Workflow execution logs.
- Dynamic Types plug-in configurations.

This chapter includes the following topics:

- [Migrate an Embedded vRealize Orchestrator 7.x Instance](#)
- [Migrate an Embedded vRealize Orchestrator 7.x Cluster](#)
- [Additional Migration Requirements for Content Accessing the File System](#)

Migrate an Embedded vRealize Orchestrator 7.x Instance

You can migrate a single node vRealize Orchestrator instance that is embedded in vRealize Automation 7.x to an embedded vRealize Orchestrator 8.x deployment.

The migration transfers an embedded vRealize Orchestrator 7.x configuration to your vRealize Orchestrator 8.x environment. The migration involves overwriting all existing elements in your vRealize Orchestrator 8.x environment.

You perform the migration by using the `vro-migrate` script bundled with the vRealize Orchestrator appliance.

Note The migration script stops the vRealize Orchestrator services automatically. You might have to schedule a maintenance window for your source vRealize Automation environment.

Prerequisites

- Migration is supported for embedded vRealize Orchestrator 7.3 or later.
- Back up the target vRealize Automation environment.
- Verify that SSH access is enabled on the source vRealize Automation instance and target vRealize Automation environment.
- Verify that the source vRealize Automation database is accessible from the target vRealize Automation environment.

Procedure

- 1 Log in to the vRealize Orchestrator appliance command line of your target environment over SSH as **root**.
- 2 To start the migration, run the `vro-migrate` script.
- 3 Follow the command prompts to provide the fully qualified domain name (FQDN) and credentials of the source vRealize Orchestrator instance.
- 4 (Optional) To follow the migration progress, access the migration log:
 - a Log in to your target vRealize Orchestrator appliance command line over a separate SSH session as **root**.
 - b Run the `tail -f /var/log/vro-migration.log` command.

The migration process begins. You receive a notification on the target vRealize Orchestrator appliance when the migration finishes.

- 5 (Optional) After the migration process finishes, log in to the source vRealize Orchestrator appliance and restart the `vco-server` and `vco-configurator` services.

Note Restarting the vRealize Orchestrator services ensures that your 7.x deployment is accessible after migration. After the restart, navigate to the **Services** tab in the source vRealize Automation, and verify that the vRealize Orchestrator services are registered.

- 6 Log in to the target vRealize Automation appliance over SSH, run `kubectl get pods -n prelude`, and verify that the vRealize Orchestrator appliance reports 3/3.

Note You might have to wait for up to 20 minutes before you run the `kubectl get pods -n prelude` command.

- 7 Verify that vRealize Orchestrator is accessible in the target vRealize Automation environment.

Migrate an Embedded vRealize Orchestrator 7.x Cluster

You can migrate a clustered vRealize Orchestrator deployment that is embedded in a vRealize Automation 7.x environment to an embedded vRealize Orchestrator 8.2 Patch 1 environment.

The migration transfers a clustered vRealize Orchestrator 7.x configuration to your vRealize Orchestrator 8.2 Patch 1 environment. The migration involves overwriting all existing elements in your vRealize Orchestrator 8.x environment.

You perform the migration by using the `vro-migrate` script bundled with the vRealize Orchestrator appliance.

Note The migration script stops the vRealize Orchestrator services of the primary node automatically. Before you run the migration script, stop the services of the replica nodes of your clustered 7.x deployment.

```
service vco-server stop
service vco-configurator stop
```

Prerequisites

- Migration is supported for embedded vRealize Orchestrator 7.3 or later.
- Configure a vRealize Orchestrator cluster in your target vRealize Automation 8.2 Patch 1 environment. See *Configure a vRealize Orchestrator Cluster* in *Installing and Configuring VMware vRealize Orchestrator*.
- Back up the target vRealize Automation environment.
- Verify that SSH access is enabled on the source vRealize Automation instance and target vRealize Automation environment.
- Verify that the source vRealize Automation database is accessible from the target vRealize Automation environment.

Procedure

- 1 Log in to the vRealize Orchestrator appliance command line of your target environment over SSH as **root**.
- 2 To start the migration, run the `vro-migrate` script.

- 3 Follow the command prompts to provide the fully qualified domain name (FQDN) and credentials of the source vRealize Orchestrator instance.
- 4 (Optional) To follow the migration progress, access the migration log:
 - a Log in to your target vRealize Orchestrator appliance command line over a separate SSH session as **root**.
 - b Run the `tail -f /var/log/vro-migration.log` command.

The migration process begins. You receive a notification on the target vRealize Orchestrator appliance when the migration finishes.

- 5 After the migration process finishes, run the following script in the target vRealize Orchestrator appliance command line.

```
kubectl -n prelude scale deployment vco-app --replicas=3
```

- 6 (Optional) If you want to access your vRealize Orchestrator 7.x environment after migration, log in to the source vRealize Orchestrator appliance and restart the `vco-server` and `vco-configurator` services.

Results

You have migrated your clustered vRealize Orchestrator deployment.

Additional Migration Requirements for Content Accessing the File System

Content migrated to the vRealize Orchestrator file system must follow the requirements of the new container-based appliance.

Because the vRealize Orchestrator appliance is running in a container, it has limitations regarding access to the file system. The `js-io-rights.conf` file still determines if a file is accessible from the vRealize Orchestrator scripting API, but you cannot use arbitrary folders in the file system. The main folder accessible to the vRealize Orchestrator service is `/var/run/vco`. Under the vRealize Orchestrator appliance file system, this folder is mapped under `/data/vco/var/run/vco`. All local files that access the vRealize Orchestrator scripting API must be moved to the specified main directory. Under the main directory, you can create subdirectories for your content.

For example, if you want to mount an external NFS volume to your vRealize Orchestrator appliance, you must mount it in `/data/vco/var/run/vco/mount_directory_path`. Afterwards, the vRealize Orchestrator scripting API can access the mounted NFS volume at `/var/run/vco/mount_directory_path`.

Kerberos Configuration

To use a Kerberos configuration, you can only use the `/data/vco/usr/lib/vco/app-server/conf/krb5.conf` file. For information on Kerberos debug logging, see *Enable Kerberos Debug Logging* in *Installing and Configuring VMware vRealize Orchestrator*.

How do I view my migration results

12

After migrating your vRealize Automation 7 source environment components, you can view the migration results.

To view your migration results, click the Migration Results tab on the Infrastructure, Subscriptions, and Deployments tabs. The migrated components are listed with their status:

- **Migrating** - Item is being migrated.
- **Migrated** - Migration is complete and successful. You can view and use the migrated item in your vRealize Automation 8 environment.
- **Failed** - The migration failed. Review the item in your source environment, modify as needed, retry migration.
- **Excluded** - Not Ready business group, subscription, or deployment was migrated but any of its not ready items were not migrated and are listed as excluded.
- **Rollback** - Migrated item was rolled back and is no longer available for use in vRealize Automation 8.

You can also export your migration results by clicking export. The migration results report includes live links that when clicked open the migrated content in vRealize Automation 8.

This chapter includes the following topics:


- [How do I view constructs mapping between vRealize Automation 7 and vRealize Automation 8](#)

How do I view constructs mapping between vRealize Automation 7 and vRealize Automation 8

Using the migration assistant tool, you can view mapping between your vRealize Automation 7 source instance and vRealize Automation 8.

After migration, components might be mapped differently in vRealize Automation 8 than they were in vRealize Automation 7. When viewing your migration results, refer to the mapping constructs table to identify how your source components were migrated and stored.

Concept Comparisons

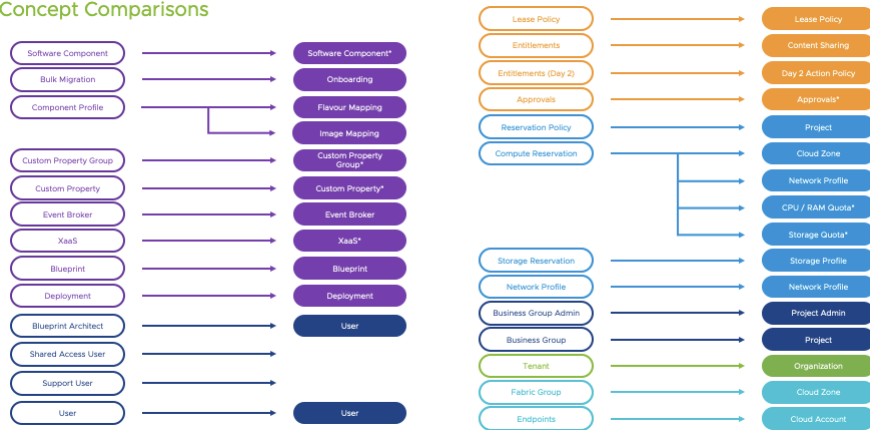

Common Reservations

Common reservations are identified by matching cloud zones, compute, and region parameters. When migrated, the migration assistant tool assigns a tag based on the reservation policy to common reservations and merges them into one under the same cloud zone. This merging process also applies to Network Profiles and Storage Profile migrations.

Note If you do not previously define a network profile before migrating, the migration assistant tool creates a new one based on the reservation name and reuse it for each subsequent reservation.

You can view the migration results and reservation mapping by clicking the migrated business group and selecting the **Migration Results** tab.

What happens during a migration rollback

13

If necessary, you can rollback migrated items using the migration assistant.

The migration assistant has a rollback feature that allows you to remove migrated items from your vRealize Automation 8 environment. If the migrated item was modified post-migration in vRealize Automation 8 and then rolled back, all post-migration edits are deleted. If you rollback a business group that contains a shared cloud template, the cloud template ownership is transferred to the remaining migrated project associated with the cloud template.

Note Cloud zone tags and custom forms are retained after performing a rollback. Business groups cannot be rolled back if there are active deployments associated with a project.

To rollback migrated items:

- 1 Navigate to the Migration Assistant Service.
- 2 Select the migrated item from the Infrastructure or Subscription page.

Note You can only rollback migrated business groups and subscriptions.

- 3 Click **Rollback**.

This chapter includes the following topics:

- [How do I migrate updates to my source environment made after migration](#)

How do I migrate updates to my source environment made after migration

After performing an initial migration to vRealize Automation 8, you might make changes to your source 7.x environment that you also want to migrate.

Depending on the type updates, new content versus updates to existing content, you might have to remigrate or rollback.

New content added to 7.x source environment

If you created new content in your 7.x source environment, you do not have to rollback your vRealize Automation 8 migration. To migrate your new content, remigrate your 7.x source environment. The migration assistant identifies and migrates the new content.

Updated existing 7.x source environment

If you updated existing content in your 7.x source environment you must rollback your vRealize Automation 8 migration. After rolling back, remigrate your source environment.

Manual Post Migration Steps

14

After migrating to vRealize Automation 8, you might have to perform some manual post migration steps.

Catalog Icons and Branding

To use catalog icons and any branding items, you have to manually add them to vRealize Automation 8 as they are not carried over during migration.

This chapter includes the following topics:

- [Troubleshooting: Migration Assessment](#)
- [Troubleshooting: Migration Failed](#)
- [Troubleshooting: Migration Rollback Failed](#)

Troubleshooting: Migration Assessment

If your migration assessment fails or encounters problems, perform these troubleshooting steps.

Table 15-1. Troubleshooting Migration Assessment

Problem	Reason	Solution
Business group assessment failed	Your migration assessment might fail after connecting a source account.	Retry the migration assessment.
Assessment Report only shows information for one tenant when I assessed multiple.	Assessment reports only shows the tenant information of the last assessed tenant and not all assessed tenants.	Re-add the missing tenant and rerun assessment. Repeat for each missing tenant.
After adding a multi-org source environment, the source instance page shows a 404 Bad Request error.	One or more tenants are opened as tabs in the same browser window.	Use a different browser for each tenant.

Troubleshooting: Migration Failed

For various reasons, your migration to vRealize Automation 8 might fail. If your migration fails, perform these troubleshooting steps.

Table 15-2. Troubleshooting Failed Migration

Type of Migration	Reason	Solution
Cloud Account Migration	Your cloud account migration might fail due to a migration timeout.	Retry cloud account migration.
Blueprint Migration failure for blueprints that contain NSX components.	During bulk migration, if any of the endpoints fail to migrate for the business group and the same business group contains NSX components, the NSX association might fail. For example, blueprints containing security groups fail to migrate because the migration assistant service does not find the associated NSX cloud account.	Manually add the NSX association to vCenters in vRealize Automation 8 and retry migration.
Subscription migration failed	Some subscriptions depend on fields such as deploymentId and blueprintId. If infrastructure components have not been migrated first, subscription migration fails.	Migrate infrastructure components and then retry subscription migration.
XaaS Blueprint or Custom Resource migration failed	If the underlying workflows have not been migrated or are not supported in vRealize Automation 8, XaaS blueprint/Custom Resource migration fails.	Migrate underlying workflows and then retry XaaS Blueprint/Custom Resource migration. If the workflow is not supported the blueprint/resource can't be migrated.

Troubleshooting: Migration Rollback Failed

For various reasons, your migration rollback might fail. If it fails, perform these troubleshooting steps.

Table 15-3. Troubleshooting Failed Rollbacks

Reason for Failure	Solution
If your vRealize Automation 8 environment contains active deployments, the bulk rollback of business groups and projects fails.	Delete active deployments from your vRealize Automation 8 environment and retry rollback.