

# VMware AirWatch Windows Rugged Platform Guide

Deploying and managing Windows Rugged devices

AirWatch v9.3

**Have documentation feedback?** Submit a Documentation Feedback support ticket using the Support Wizard on [support.air-watch.com](http://support.air-watch.com).

Copyright © 2018 VMware, Inc. All rights reserved. This product is protected by copyright and intellectual property laws in the United States and other countries as well as by international treaties. VMware products are covered by one or more patents listed at <http://www.vmware.com/go/patents>.

VMware is a registered trademark or trademark of VMware, Inc. in the United States and other jurisdictions. All other marks and names mentioned herein may be trademarks of their respective companies.

# Table of Contents

---

<b>Chapter 1: Overview</b> .....	<b>4</b>
Introduction to the Windows Rugged Platform .....	5
Windows Rugged Requirements .....	5
<b>Chapter 2: Product Provisioning for Windows Rugged Devices</b> .....	<b>6</b>
Product Provisioning Overview .....	7
<b>Chapter 3: Windows Rugged Device Enrollment</b> .....	<b>8</b>
Windows Rugged Enrollment .....	9
Enroll Windows Rugged Devices Through Web Enrollment .....	9
Unenroll Windows Rugged Devices .....	10
AirWatch Cab Creator for Windows Rugged .....	10
Create a Custom CAB .....	11
<b>Chapter 4: Windows Rugged Device Profiles</b> .....	<b>14</b>
Windows Rugged Profiles Overview .....	16
Create a Passcode Profile (Windows Rugged) .....	17
Create a Restrictions Profile (Windows Rugged) .....	18
Dynamic Wi-Fi Profiles (Windows Rugged) .....	18
Configure a Wi-Fi Profile (Windows Rugged) .....	19
Configure a Motorola Fusion Wi-Fi Profile (Windows Rugged) .....	20
Exchange ActiveSync Profiles (Windows Rugged) .....	25
Configure an Exchange ActiveSync Profile (Windows Rugged) .....	25
Credentials Profile (Windows Rugged) .....	27
Create a Credentials Profile (Windows Rugged) .....	27
Launcher Profile (Windows Rugged) .....	28
Create a Launcher Profile (Windows Rugged) .....	28
Update the Launcher Profile from the Windows Rugged Device .....	32
Configure Shared Device Launcher Profiles (Windows Rugged) .....	33
Create a VPN Profile (Windows Rugged) .....	34
Create a Time Sync Profile (Windows Rugged) .....	35
Create a Shortcut Profile (Windows Rugged) .....	36

Create a Time Zone Profile (Windows Rugged) .....	37
Create a Custom Attribute Payload .....	37
Create a Proxy Profile (Windows Rugged) .....	38
Create a GPRS Profile (Windows Rugged) .....	39
<b>Chapter 5: Compliance Policies .....</b>	<b>41</b>
Compliance Policy Overview .....	42
<b>Chapter 6: AirWatch Agent for Windows Rugged .....</b>	<b>43</b>
Configure the AirWatch Agent for Windows Rugged .....	44
Windows Rugged Device Logging with the AirWatch Agent v5.X+ .....	47
<b>Chapter 7: Custom Attributes .....</b>	<b>50</b>
Custom Attributes Overview .....	51
Create Custom Attributes .....	51
Custom Attributes Importing .....	52
Windows Rugged Custom Attributes .....	53
Create an XML Provisioning File .....	55
<b>Chapter 8: Managing Windows Rugged Devices .....</b>	<b>57</b>
Windows Rugged Device Management Overview .....	58
Device Dashboard .....	58
Device List View .....	58
Windows Rugged Device Details Page .....	59
Remote Management .....	60
<b>Accessing Other Documents .....</b>	<b>61</b>

# Chapter 1: Overview

- Introduction to the Windows Rugged Platform .....5
- Windows Rugged Requirements .....5

## Introduction to the Windows Rugged Platform

AirWatch provides you with a robust set of mobility management solutions for enrolling, securing, configuring, and managing your Windows Rugged deployment. Through the AirWatch Console, you have several tools and features for managing the entire lifecycle of corporate and employee-owned devices.

Windows Mobile and Windows CE devices and their operating systems are proven performers in rugged environments like warehouses, courier services, and healthcare facilities. These devices represent most mobile devices in these environments and can perform many functions such as sales, inventory, scanners, and more. With the AirWatch solution, you can manage these devices and integrate them with your other mobile platforms, which give you a central location for mobile device management.

## Windows Rugged Requirements

Before reading this guide, gather and prepare the requirements AirWatch requires for Windows Rugged devices.

### Platforms Supported

- Windows CE 5, 6, and 7
- Windows Mobile 5.x
- Windows Mobile 6.1
- Windows Mobile 6.5 (Professional and Standard)
- Windows Embedded 6.5

### Agents and Versions Supported

AirWatch recommends using the 5.X.X version of the AirWatch Agent for Windows Rugged. AirWatch no longer supports bug reports, code changes, or new enhancements for previous version of the AirWatch Agent for Windows Rugged.

# Chapter 2:

## Product Provisioning for Windows Rugged Devices

Product Provisioning Overview .....7

## Product Provisioning Overview

Product provisioning allows you to create, through AirWatch, products containing profiles, applications, and files/actions (depending on the platform you use). These products follow a set of rules, schedules, and dependencies as guidelines for ensuring your devices remain up to date with the content they need.

Product provisioning also encompasses the use of relay servers. These servers are FTP(S) servers designed to work as a go-between for devices and the AirWatch Console. Create these servers for each store or warehouse to store product content for distribution to your devices.

Another product provisioning feature is the staging methods of enrollment. Depending on the device type, you can perform device staging that quickly enrolls a device and downloads the AirWatch Agent, Wi-Fi profile, and any other important content. The methods of staging a device vary by platform.

# Chapter 3:

## Windows Rugged Device Enrollment

Windows Rugged Enrollment .....	9
Enroll Windows Rugged Devices Through Web Enrollment ..	9
Unenroll Windows Rugged Devices .....	10
AirWatch Cab Creator for Windows Rugged .....	10
Create a Custom CAB .....	11

## Windows Rugged Enrollment

Enroll Windows Rugged devices into AirWatch to access internal content and features using Web enrollment. Web enrollment directs the user to an enrollment URL to complete enrollment and download the AirWatch Agent.

Device enrollment is required for all Windows Rugged devices you want managed by AirWatch.

If you use the Product Provisioning functionality provided by AirWatch, you can enroll your Windows Rugged devices through additional enrollment methods. These additional methods, including sideload staging, require product provisioning. For more information on product provisioning, see the Product Provisioning guide on [AirWatch Resources](#).

### Enrollment Basics

The Windows Rugged platform covers Windows CE and Windows Mobile devices. For more information on the supported devices, see [Windows Rugged Requirements on page 5](#)

Windows Rugged enrollment uses either the web enrollment method or the Product Provisioning staging functionality.

### Web Enrollment

The web enrollment method for Windows Rugged devices takes end users to enter enrollment credentials into the web browser on the device. For more information, see [Enroll Windows Rugged Devices Through Web Enrollment on page 9](#).

To unenroll Windows Rugged devices, you must perform an Enterprise Wipe in the AirWatch Console followed by manually uninstalling the AirWatch Agent. For more information, see [Unenroll Windows Rugged Devices on page 10](#).

### AirWatch Cab Creator

The AirWatch Cab Creator for Windows Rugged allows you to create custom CAB files for use on Windows Rugged devices. These custom CAB files consist of any files or applications you add from your computer. Simplify the install process combining all the files and applications you want on your Windows Rugged device into a custom CAB file. For more information, see [Create a Custom CAB on page 11](#).

## Enroll Windows Rugged Devices Through Web Enrollment

Simplify device enrollment with Web enrollment instead of downloading the AirWatch Agent manually. Send end users to a URL to enroll their devices into AirWatch.

1. Go to the enrollment URL using the native browser on the device.
2. Enter the applicable AirWatch solution information in the **Group ID**, **Username**, and **Password** text boxes.
3. Optionally, select the **Device Ownership** type (**Employee Owned**, **Corporate-Dedicated**, or **Corporate-Shared**) and select **Enroll**.
4. Accept the **Terms of Use** if this option is configured.
5. Select **Accept** to download the AirWatch Agent to the device.
6. Select **Continue** to complete the enrollment.

## Unenroll Windows Rugged Devices

When it is time to unenroll a device from AirWatch, ensure that you choose the best method for your situation. Unenroll devices using enterprise wipe from the AirWatch Console or remove the AirWatch Agent from the end-user device.

### Enterprise Wipe

Enterprise wipe allows you to clear corporate data, applications, and profiles from a device without removing personal data. This action allows you to unenroll an employee-owned device without clearing the personal data.

To perform an enterprise wipe from the AirWatch Console:

1. Navigate to **Devices > List View** and select the Windows Rugged device you want to unenroll.
2. From the Device Detail page, select the **More** option.
3. Select the **Enterprise Wipe** option under **Management**.
4. Enter your Admin PIN to confirm the Enterprise Wipe.

The device undergoes an enterprise wipe to remove corporate data and unenroll the device from AirWatch.

You can also perform an enterprise wipe from the device through the AirWatch Agent. To perform a device-side enterprise wipe:

1. On the device, open the AW Diagnostics app.
2. Navigate to the **Advanced** tab.
3. Select **Enterprise Wipe**.

The device removes corporate data and unenrolls from AirWatch.

### Uninstalling the AirWatch Agent

You can also unenroll a device from AirWatch by uninstalling the AW Core Agent CAB. To unenroll by uninstalling the AirWatch Agent:


1. On the device, navigate to **Settings > Remove Programs**.
2. Find the AW Core Agent CAB and uninstall the application.

While the device removes corporate data, the device remains enrolled with AirWatch. This uninstall method is not the preferred method.

## AirWatch Cab Creator for Windows Rugged

The AirWatch Cab Creator for Windows Rugged allows you to create custom CAB files for use on Windows Rugged devices. These custom CAB files consist of any files or applications you add from your computer.

Simplify the install process combining all the files and applications you want on your Windows Rugged device into a custom CAB file. You can import CAB files into your own custom CAB file. This feature allows you to create one custom CAB file that contains all the CAB files you must install on a device. You can also use the AirWatch Cab Creator to edit any existing CAB file on your PC. The AirWatch Cab Creator also supports importing files that you can then convert to CAB file upon saving.

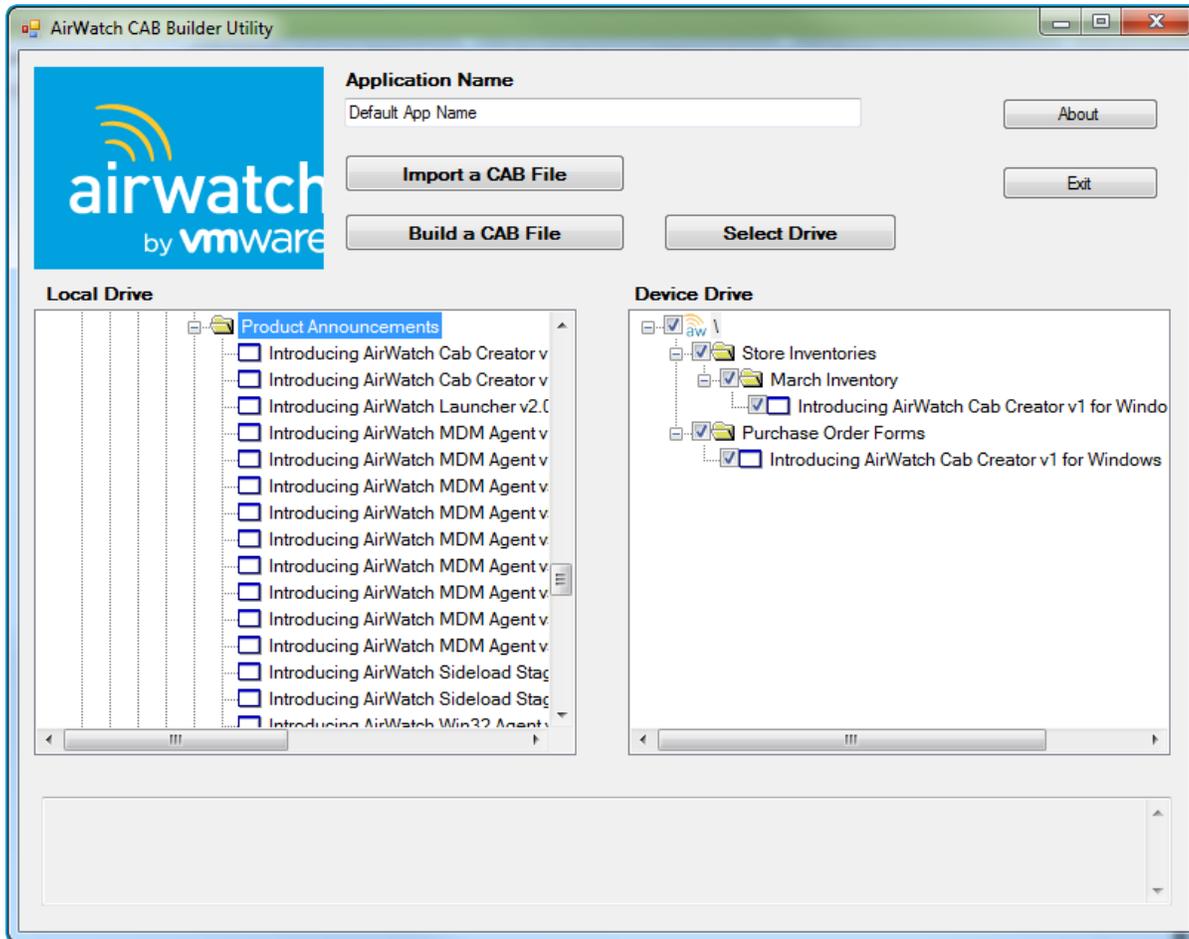

## Create a Custom CAB

Simplify installation of files onto your Windows Rugged devices by creating custom CAB files using the AirWatch Cab Creator for Windows Rugged. These custom CABS can contain your business files or the files necessary to upgrade your Windows Rugged devices.


### Requirements

To use the AirWatch Cab Creator for Windows Rugged, you must meet the following requirements:


- A Windows device running Windows 7+
- .NET Framework 4.5

To create a custom CAB file:

1. Download the AirWatch Cab Creator for Windows Rugged from [AirWatch Resources](#).
2. Unzip the file to your preferred directory.
3. Double-click CabBuilder.exe to start the app.

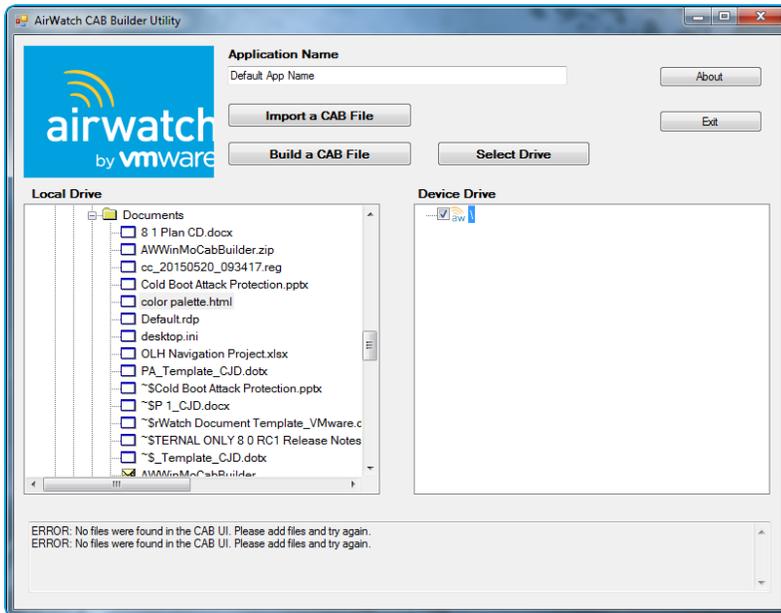

4. Navigate to a file on your **Local Drive** you want to add to the custom CAB file. You can select a different drive by selecting **Select Drive**.
5. Enter an **Application Name**. This text box is the name of the CAB file after installation. Remember the name for use in Uninstall Manifest items.
6. Select the file and drag it to the **Device Drive** pane.  
To create a folder on the device drive, right-click the root drive and select **Add Folder**.
7. Repeat Step 5 for each file or application you want to add to the custom CAB file.
8. (Optional) Add an existing CAB file to your custom CAB file by selecting **Import a CAB File**.
9. Select **Build a CAB File** to save the CAB file and select a name for the file.

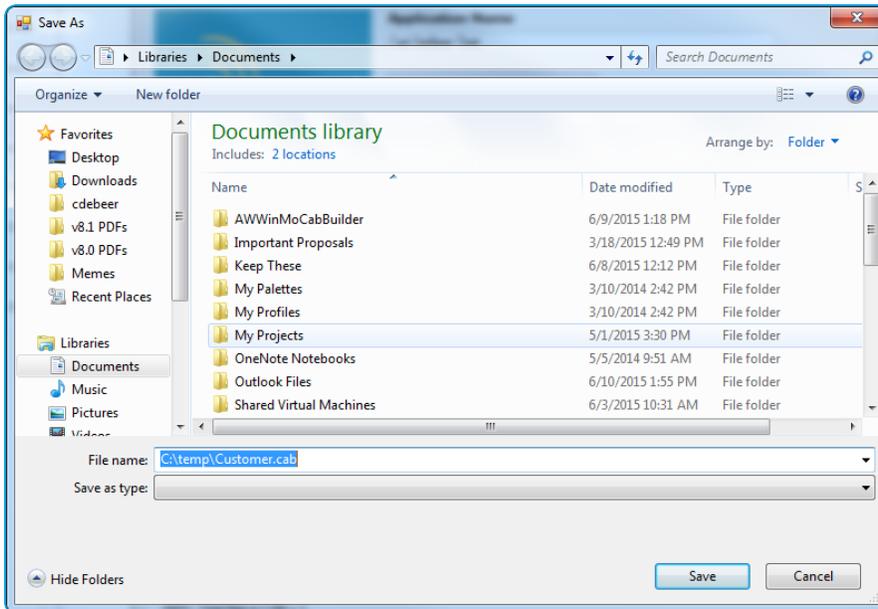

10. Select **Save** to create a custom CAB file.

# Chapter 4:

## Windows Rugged Device Profiles

Windows Rugged Profiles Overview .....	16
Create a Passcode Profile (Windows Rugged) .....	17
Create a Restrictions Profile (Windows Rugged) .....	18
Dynamic Wi-Fi Profiles (Windows Rugged) .....	18
Configure a Wi-Fi Profile (Windows Rugged) .....	19
Configure a Motorola Fusion Wi-Fi Profile (Windows Rugged) .....	20
Exchange ActiveSync Profiles (Windows Rugged) .....	25
Configure an Exchange ActiveSync Profile (Windows Rugged)	25
Credentials Profile (Windows Rugged) .....	27
Create a Credentials Profile (Windows Rugged) .....	27
Launcher Profile (Windows Rugged) .....	28
Create a Launcher Profile (Windows Rugged) .....	28
Update the Launcher Profile from the Windows Rugged Device .....	32
Configure Shared Device Launcher Profiles (Windows Rugged) .....	33
Create a VPN Profile (Windows Rugged) .....	34
Create a Time Sync Profile (Windows Rugged) .....	35
Create a Shortcut Profile (Windows Rugged) .....	36
Create a Time Zone Profile (Windows Rugged) .....	37
Create a Custom Attribute Payload .....	37

Create a Proxy Profile (Windows Rugged) .....38  
Create a GPRS Profile (Windows Rugged) .....39

## Windows Rugged Profiles Overview

Profiles are the primary means to manage devices. Configure profiles so your Windows Rugged devices remain secure and configured to your settings.

### Overview

You can think of profiles as the settings and rules that, when combined with compliance policies, help you enforce corporate rules and procedures. They contain the settings, configurations, and restrictions that you want to enforce on devices.

The individual settings you configure, such as the settings for Wi-Fi, VPN, and passcodes, are payloads. Consider associating only one payload per profile. Create multiple profiles for the different settings you want to establish.

### Device Access

Some device profiles configure the settings for accessing a Windows Phone device. Use these profiles to ensure that access to a device is limited only to authorized users.

Some examples of device access profiles include:

- Secure a device with a Passcode profile. For more information, see [Create a Passcode Profile \(Windows Rugged\) on page 17](#).
- Configure the device launcher and layout. For more information, see [Launcher Profile \(Windows Rugged\) on page 28](#).

### Device Security

Ensure that your Windows Phone devices remain secure through device profiles. These profiles configure the native Windows security features or configure corporate security settings on a device through AirWatch.

Some examples of device security profiles include:

- Use a Wi-Fi profile to connect enrolled devices to your corporate Wi-Fi without sending the network credentials to users. For more information, see [Dynamic Wi-Fi Profiles \(Windows Rugged\) on page 18](#).
- Ensure access to internal resources for your devices with the VPN profile. For more information, see [Create a VPN Profile \(Windows Rugged\) on page 34](#).

### Device Configuration

Configure the various settings of your Windows Phone devices with the configuration profiles. These profiles configure the device settings to meet your business needs.

Some examples of device configuration profiles include:

- Set up an Exchange account on a device with an Exchange ActiveSync profile. For more information, see [Configure an Exchange ActiveSync Profile \(Windows Rugged\) on page 25](#).
- Configure the device time zone. For more information, see [Create a Time Zone Profile \(Windows Rugged\) on page 37](#).

## Profiles and Product Provisioning

If you plan on using these profiles for product provisioning, review the **Product Provisioning for Windows Rugged Devices Guide** available on [AirWatch Resources](#).

### Create a Passcode Profile (Windows Rugged)

Deploy a Passcode payload to require users to protect their devices with passcodes each time they return from an idle state. This action ensures that all sensitive corporate information on managed devices remains protected.

**Important:** Passcode payloads apply only to Windows Rugged devices and not Windows CE devices.

To enforce a Passcode profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Passcode** profile.
5. Configure the Passcode settings:

Settings	Descriptions
<b>Maximum Passcode Age</b>	Requires users to renew passcodes at selected intervals.
<b>Passcode</b>	Sets a specific passcode for the device.
<b>Maximum Passcode Length</b>	Sets the maximum number of characters a passcode may be.
<b>Minimum Passcode Length</b>	Sets the minimum number of characters a passcode must be.
<b>Minimum Number of Upper Case Letter</b>	Sets the minimum number of upper case letters a passcode must contain.
<b>Minimum Number of Lower Case Letter</b>	Sets the minimum number of lower case letters a passcode must contain.
<b>Minimum Number of Numerical Digits</b>	Sets the minimum number of numerical digits a passcode must contain.
<b>Grace period for device lock</b>	Specifies a period of inactivity before locking a device.
<b>Maximum Number of Failed Attempts</b>	Sets a limit on failed passcode attempts before wiping a device.

6. Select **Save & Publish** to push the profile to devices.

## Create a Restrictions Profile (Windows Rugged)

Deploy a Restrictions payload to restrict the options end users have on devices. Restrictions allow you to ensure that your device is secure by controlling what an end user can use to save and store data.

**Important:** You can use a Restriction payload only on Windows Rugged devices and not on Windows CE devices.

To enforce a Restrictions profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Restrictions** profile.
5. Configure the Restriction settings:

Settings	Descriptions
<b>Allow Camera</b>	Enable to allow access to the camera application.
<b>Allow External Storage</b>	Enable to allow use of external storage memory.
<b>Remove Encryption on External Storage</b>	Enable to allow the removal of encryption on external storage.
<b>Enable On-Device Encryption</b>	Enable to allow encryption on the device.
<b>Allow Bluetooth</b>	Enable to allow the use of Bluetooth.

6. Select **Save & Publish** when you are finished to push the profile to devices.

## Dynamic Wi-Fi Profiles (Windows Rugged)

Using custom attributes, you can create dynamic Wi-Fi profiles that allow you to configure device Wi-Fi settings across smart groups and OGs without creating multiple profiles. The custom attributes can use device-side values or override device values with a specific value.

This feature works best when managing many different Wi-Fi networks across your mobile fleet. When updating the access credentials for all your Wi-Fi networks, import a batch of custom attributes (using the .csv batch import process). Using the Device Custom Attribute Values template, you can upload specific values to individual devices. This process allows you to update the credentials across your mobile fleet quickly without having to create hundreds of different Wi-Fi profiles.

Dynamic Wi-Fi profiles allow you to specify certain text boxes in the profile as a dynamic value. For example, the **Service Set Identifier** can be set to a dynamic value so devices can use their own value as opposed to one service set identifier per profile. If you have devices in one OG that use different Wi-Fi credentials, use dynamic Wi-Fi profiles to create one profile that configures the different settings required.

To use a custom attribute in your Wi-Fi Profile, enable the check box next to a text box. Enabling the text box allows you to select the custom attribute, enter a default value, and set the default value to override device values for the attribute. For more information on custom attributes and instructions for creating them, see [Custom Attributes Overview on page 51](#).

## Configure a Wi-Fi Profile (Windows Rugged)

Create a Wi-Fi profile to connect devices to hidden, encrypted, or password-protected corporate networks. Wi-Fi profiles are useful for end users who need access to multiple networks or for configuring devices to connect automatically to the appropriate wireless network.

**Important:** Zero Wireless Config is not available for Windows CE devices except Psion CE devices. You can provision Wi-Fi profiles using Zero Wireless Config to Psion CE devices only but not any other Windows CE devices.

To configure a Wi-Fi profile, follow the steps detailed below:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Wi-Fi** profile.
5. Configure the Wi-Fi settings:

Settings	Descriptions
<b>Network Adapter Type</b>	Select the adapter type. <ul style="list-style-type: none"> <li>• Standard Microsoft (Zero Wireless Config).</li> <li>• Motorola Fusion – For more information, see <a href="#">Configure a Motorola Fusion Wi-Fi Profile (Windows Rugged) on page 20</a>.</li> <li>• Honeywell DeviceScope – Network Adapter Type for Honeywell devices.</li> </ul>
<b>Service Set Identifier</b>	Enter an identifier that is associated with the name (SSID) of the desired Wi-Fi network.
<b>Wi-Fi Meta Network</b>	Choose whether you are connecting through a proxy with <b>Work</b> or connecting directly to the <b>Internet</b> .
<b>RFBand</b>	Honeywell Network Adapter Type only.
<b>IP Addressing Mode</b>	Select the type of IP Addressing mode used.
<b>Operating Mode</b>	Select the type of operating mode used.

Settings	Descriptions
<b>Security Type</b>	Select your Wi-Fi security type. The type selected determines which additional fields display
<b>Authentication Type</b>	Select the Authentication type to be used with enterprise applications.
<b>Encryption</b>	Select the encryption type for traffic over the Wi-Fi connection.
<b>Pre Shared Key</b>	Enter the Pre Shared Key for your Wi-Fi. Displays when <b>Security type</b> is set to <b>WPA Personal</b> or <b>WPA2 Personal</b> .
<b>Domain Name</b>	Enter the Domain name for your certificates. Displays when <b>Security type</b> is set to <b>WPA Enterprise</b> or <b>WPA2 Enterprise</b> .
<b>Username</b>	Enter the username for the domain. Displays when <b>Security type</b> is set to <b>WPA Enterprise</b> or <b>WPA2 Enterprise</b> .
<b>Password</b>	Enter the password used for the domain. Displays when <b>Security type</b> is set to <b>WPA Enterprise</b> or <b>WPA2 Enterprise</b> .
<b>Identity Certificate</b>	Select the certificate used to identify the end user to the server.
<b>Server Certificate</b>	Select the certificate used to identify the server to the end user.

6. Select **Save & Publish** to push the profile to devices.

## Configure a Motorola Fusion Wi-Fi Profile (Windows Rugged)

The Windows Rugged Wi-Fi profile allows you to specify the network adapter to support the Motorola Fusion type of network adapter. These settings allow you to control when and how often the device connects to Wi-Fi.

The settings differ based on the Motorola adapter type selected.

**Note:** The settings that follow are based on the specific Motorola adapter type selected.

To configure a Motorola Fusion Wi-Fi profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Wi-Fi** profile.
5. Configure the Wi-Fi settings:

Settings	Descriptions
<b>Network Adapter Type</b>	Set to Motorola Fusion. For other adapter types, see <a href="#">Configure a Wi-Fi Profile (Windows Rugged) on page 19</a> .
<b>Motorola Adapter Type</b>	These options change the text boxes available. Text boxes that are tied to a specific Motorola adapter type are noted. <ul style="list-style-type: none"> <li>• <a href="#">WLANFusionPublic-specific settings on page 21</a></li> <li>• <a href="#">WLANFusion3xPublic on page 22</a></li> <li>• <a href="#">WLANFusionX2Public on page 23</a></li> </ul>
<b>WLANFusionPublic-specific settings</b>	
<b>Set Fusion Options</b>	Set to <b>Yes</b> to list extra network options.
<b>Enable 80211d</b>	Set to <b>Change</b> to enable 802.11d wireless specification for operation in extra regulatory domains.
<b>Change Regulatory Country Code</b>	Set to <b>Change</b> to choose the Country Code for the device.
<b>Set RFBand</b>	Set to <b>Change</b> to specify the RF Band for the device.
<b>Enable Auto Time Config</b>	Set to <b>Change</b> to enable automatic time configuration.
<b>Set FAPI Access Password</b>	Set to <b>Change</b> to choose a FAPI access code.
<b>Set FAPI Access Code</b>	Enter the FAPI Access Code you want for the device.
<b>Set Profile Configuration</b>	Set to <b>Yes</b> to set the profile settings.
<b>Service Set Identifier</b>	remotely and securely
<b>Profile Country Code</b>	Enter the country code to use with the profile.
<b>Wi-Fi Meta Network</b>	Choose whether you are connecting through a proxy with <b>Work</b> or connecting directly to the <b>Internet</b> .
<b>IP Addressing Mode</b>	Choose to use <b>DHCP</b> or <b>Static</b> IP Addressing. If you choose <b>Static</b> , enter the settings for your static IP address.
<b>Disable all other Profiles</b>	Set to <b>Yes</b> to disable all other Wi-Fi profiles on the device.
<b>Operating Mode</b>	Select the operating mode.
<b>Transmit Power Level</b>	Choose the transmit power level.
<b>Power Level</b>	Select the balance of power use.
<b>Security Type</b>	Choose the encryption type for the network connection.

Settings	Descriptions
<b>Authentication Type</b>	<p>Choose an authentication type to be used with enterprise applications. Additional text boxes display depending on the type chosen.</p> <p>The FAST authentication types (EAP-FAST-MSCHAPV2, EAP-FAST-TLS, and EAP-FAST-GTC) add the following additional text boxes:</p> <ul style="list-style-type: none"> <li>• <b>Auto PAC Refreshing</b></li> <li>• <b>Auto PAC Provisioning</b></li> <li>• <b>PACFile Name</b></li> <li>• <b>PACFile Password</b></li> <li>• <b>Use GTC Token</b></li> </ul>
<b>Encryption</b>	Select the encryption type used for the Wi-Fi connection
<b>Pre Shared Key</b>	Enter the Pre Shared Key used for the Wi-Fi Connection.
<b>Change CCKM Setting</b>	Select change to change the CCKM Mode.
<b>Domain Name</b>	Enter the domain name used in authentication.
<b>Username</b>	Enter the user name used for authentication.
<b>Password</b>	Enter the password used for authentication.
<b>Identity Certificate</b>	Set to <b>Other</b> and enter the certificate name used for authentication.
<b>Server Certificate</b>	Set to <b>Other</b> and enter the certificate name used for authentication.
<b>WLANFusion3xPublic</b>	
<b>Set Fusion Options</b>	Set to <b>Yes</b> to list extra network options.
<b>Enable 80211d</b>	Set to <b>Change</b> to enable 802.11d wireless specification for operation in additional regulatory domains.
<b>Change Regulatory Country Code</b>	Set to <b>Change</b> to choose the Country Code for the device.
<b>Set RFBand</b>	Set to <b>Change</b> to specify the RF Band for the device.
<b>Enable Auto Time Config</b>	Set to <b>Change</b> to enable automatic time configuration.
<b>Set FAPI Access Password</b>	Set to <b>Change</b> to choose a FAPI access code.
<b>Set FAPI Access Code</b>	Enter the FAPI Access Code for the device.
<b>Set WLAN Management Mode</b>	Set to <b>Change</b> to configure the WLAN Management Mode settings.
<b>WLAN Management Mode</b>	Select either the <b>Wireless Zero Config</b> or <b>Fusion Management State</b> modes.
<b>Set Profile Configuration</b>	Set to <b>Yes</b> to set the profile settings.
<b>Handle Error By</b>	Choose to <b>Ignore Error</b> or <b>Stop On Error</b> .

Settings	Descriptions								
<b>Set Current Management Mode Option</b>	Set to <b>Change</b> to configure the management mode.								
<b>Apply Profile Regardless of Device's Current Management Mode Configuration</b>	Enable to apply the Wi-Fi profile regardless of current management mode.								
<b>Service Set Identifier</b>	Enter the identification of the wireless network the device connects with.								
<b>Profile Country Code</b>	Enter the country code to use with the profile.								
<b>Wi-Fi Meta Network</b>	Choose whether you are connecting through a proxy with <b>Work</b> or connecting directly to the <b>Internet</b> .								
<b>IP Addressing Mode</b>	Choose to use <b>DHCP</b> or <b>Static</b> IP Addressing. If you choose <b>Static</b> , enter the settings for your static IP address.								
<b>Disable all other Profiles</b>	Set to <b>Yes</b> to disable all other Wi-Fi profiles on the device.								
<b>Operating Mode</b>	Select the operating mode.								
	<table> <tr> <td><b>Transmit Power Level</b></td> <td>Choose the transmit power level.</td> </tr> <tr> <td><b>Adhoc Channel</b></td> <td>Select the Ad Hoc channel the devices use.</td> </tr> <tr> <td><b>Encryption</b></td> <td>Select the encryption type for the Wi-Fi network.</td> </tr> <tr> <td><b>Pre Share Key</b></td> <td>Enter the Pre Shared Key used for the network.</td> </tr> </table>	<b>Transmit Power Level</b>	Choose the transmit power level.	<b>Adhoc Channel</b>	Select the Ad Hoc channel the devices use.	<b>Encryption</b>	Select the encryption type for the Wi-Fi network.	<b>Pre Share Key</b>	Enter the Pre Shared Key used for the network.
<b>Transmit Power Level</b>	Choose the transmit power level.								
<b>Adhoc Channel</b>	Select the Ad Hoc channel the devices use.								
<b>Encryption</b>	Select the encryption type for the Wi-Fi network.								
<b>Pre Share Key</b>	Enter the Pre Shared Key used for the network.								
<b>Transmit Power Level</b>	Choose the transmit power level.								
<b>Power Level</b>	Select the balance of power use.								
<b>Security Type</b>	Choose the encryption type for the network connection.								
<b>Pre Shared Key</b>	Enter the Pre Shared Key used for the Wi-Fi Connection.								
<b>Change CCKM Setting</b>	Select change to change the CCKM Mode.								
<b>Domain Name</b>	Enter the domain name used in authentication.								
<b>Username</b>	Enter the user name used for authentication.								
<b>Password</b>	Enter the password used for authentication.								
<b>Identity Certificate</b>	Set to <b>Other</b> and enter the certificate name used for authentication.								
<b>Server Certificate</b>	Set to <b>Other</b> and enter the certificate name used for authentication.								
<b>WLANFusionX2Public</b>									
<b>Enable 80211d</b>	Set to <b>Change</b> to enable 802.11d wireless specification for operation in additional regulatory domains.								

Settings	Descriptions
Set RFBand	Set to <b>Change</b> to specify the RF Band for the device.
Enable Auto Time Config	Set to <b>Change</b> to enable automatic time configuration.
Set FAPI Access Password	Set to <b>Change</b> to choose a FAPI access code.
Enable IPv6	Set to <b>Change</b> to enable IPv6 settings.
Set WLAN Management Mode	Set to <b>Change</b> to configure the WLAN Management Mode settings.
WLAN Management Mode	Select either the <b>Wireless Zero Config</b> or <b>Fusion Management State</b> modes.
Enable FIPS Mode	Set to <b>Change</b> to enable FIPS mode.
Change PreAuth	Enable PreAuth to allow access points to authorize devices before they officially switchover to the new access point.
Reset Fusion Options	Set to <b>Reset</b> to reset the device's Fusion options when pushing this profile to the device.
Reset Fusion Data Store	Set to <b>Reset</b> to reset the Fusion data store on a device.
Set Profile Configuration	Set to <b>Yes</b> to set the profile settings.
Handle Error By	Choose to <b>Ignore Error</b> or <b>Stop On Error</b> .
Service Set Identifier	Enter the identification of the wireless network the device connects with.
Profile Country Code	Enter the country code to use with the profile.
Wi-Fi Meta Network	Choose whether you are connecting through a proxy with <b>Work</b> or connecting directly to the <b>Internet</b> .
IP Addressing Mode	Choose to use <b>DHCP</b> or <b>Static</b> IP Addressing. If you choose <b>Static</b> , enter the settings for your static IP address.
Disable all other Profiles	Set to <b>Yes</b> to disable all other Wi-Fi profiles on the device.
Operating Mode	Select the operating mode. <ul style="list-style-type: none"> <li><b>Transmit Power Level</b> Choose the transmit power level.</li> <li><b>Adhoc Channel</b> Select the Ad Hoc channel the devices use.</li> <li><b>Encryption</b> Select the encryption type for the Wi-Fi network.</li> <li><b>Pre Share Key</b> Enter the Pre Shared Key used for the network.</li> </ul>
Transmit Power Level	Choose the transmit power level.
Power Level	Select the balance of power use.

Settings	Descriptions
<b>Security Type</b>	Choose the encryption type for the network connection.
<b>Pre Shared Key</b>	Enter the Pre Shared Key used for the Wi-Fi Connection.
<b>Change CCKM Setting</b>	Select change to change the CCKM Mode.
<b>Domain Name</b>	Enter the domain name used in authentication.
<b>Username</b>	Enter the user name used for authentication.
<b>Password</b>	Enter the password used for authentication.

6. After setting the Motorola adapter type specific settings, select **Save & Publish** to push the profiles to devices.

## Exchange ActiveSync Profiles (Windows Rugged)

The Exchange ActiveSync profiles enable you to configure your Windows Rugged devices to access your Exchange ActiveSync server for email and calendar use.

Strongly consider only using certificates signed by a trusted third-party certificate authority (CA). Mistakes in your certificates expose your otherwise secure connections to potential man-in-the-middle attacks. Such attacks degrade the confidentiality and integrity of data transmitted between product components, and might allow attackers to intercept or alter data in transit.

The Exchange ActiveSync profile supports the native mail client and AirWatch Inbox for Windows Desktop. The configuration changes based on which mail client you use.

**Important:** You can use an EAS payload only on Windows Mobile devices and not on Windows CE devices.

## Configure an Exchange ActiveSync Profile (Windows Rugged)

Create an Exchange ActiveSync profile to give Windows Phone devices access to your Exchange ActiveSync server for email and calendar use.

To configure Exchange ActiveSync payloads:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Exchange ActiveSync** profile.
5. Configure the Exchange ActiveSync settings:

Settings	Descriptions
<b>Domain</b>	Enter the domain for the Exchange account. You may use Lookup values to create dynamic profiles.
<b>Exchange ActiveSync Host</b>	Enter the hostname or IP address for the Exchange ActiveSync server.
<b>User</b>	Enter the user name for the Exchange account. You may use Lookup values to create dynamic profiles.
Settings	
<b>Use SSL</b>	Enable to send all communications through the Secure Socket Layer.
<b>Max Body Truncation</b>	Select the maximum amount an email body is truncated in bytes.
<b>Past Days of Calendar to Sync</b>	Enter the number of days of Calendar events to download when the account syncs for the first time on the device.
<b>Past Days of Mail to Sync</b>	Enter the number of days of emails to download when the account syncs for the first time on the device.
<b>Max HTML Truncation</b>	Select the level of truncation for HTML emails.
<b>Max Email Truncation</b>	Select the maximum amount an email is truncated in bytes.
<b>Max Email File Attachment Size (MB)</b>	Select the max size (in MB) that a file may be when attached.
<b>Allow Sync When Roaming</b>	Enable to allow the email client to sync when the device is roaming.
Restrictions	
<b>Allow Calendar Sync</b>	Enable to allow the syncing of calendars.
<b>Allow Contacts Sync</b>	Enable to allow the syncing of contacts.
<b>Allow Tasks</b>	Enable to allow the syncing of tasks.
<b>Allows Text Messages</b>	Enable to allow the syncing of text messages.
<b>Allow Email Sync</b>	Allow the syncing of email. Disabling this setting removes access to email through Exchange Active Sync.
Peak Days and Schedule	
<b>Sunday</b>	Enable to allow schedule of syncing on Sundays.
<b>Monday</b>	Enable to allow schedule of syncing on Mondays.
<b>Tuesday</b>	Enable to allow schedule of syncing on Tuesdays.
<b>Wednesday</b>	Enable to allow schedule of syncing on Wednesdays.
<b>Thursday</b>	Enable to allow schedule of syncing on Thursdays.

Settings	Descriptions
<b>Friday</b>	Enable to allow schedule of syncing on Fridays.
<b>Saturday</b>	Enable to allow schedule of syncing on Saturdays.
<b>Peak Start Time</b>	Select the start time of the peak time period.
<b>Peak End Time</b>	Select the end time of the peak time period.
<b>Sync Schedule Peak</b>	Select what level of syncing happens during the peak time period.
<b>Sync Schedule Off Peak</b>	Select what level of syncing happens outside the peak time period.

6. Select **Save & Publish** to push the profile to devices.

## Credentials Profile (Windows Rugged)

A Credentials profile allows you to push Root, Intermediate, and Client certificates to support any Public Key Infrastructure (PKI) and certificate authentication use case. The profile pushes configured credentials to the proper credentials store on the Windows Rugged device.

Even with strong passcodes and other restrictions, your infrastructure remains vulnerable to brute force, dictionary attacks, and employee error. For greater security, you can implement digital certificates to protect corporate assets. To use certificates in this way, you must first configure a Credentials payload with a certificate authority, and then configure your Wi-Fi and VPN payloads. Each of these payloads has settings for associating the certificate authority defined in the Credentials payload.

## Create a Credentials Profile (Windows Rugged)

A Credentials profile pushes certificates to devices for use in authentication. With AirWatch, you can configure credentials for intermediate, trusted root, trusted publisher, and trusted people certificate stores.

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.  
These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).
4. Select the **Credentials** profile.

5. Configure the Credentials settings:

Settings	Description
<b>Credential Source</b>	Use the drop-down menu to select either <b>Upload</b> or <b>Defined Certificate Authority</b> .
<b>Credential Name</b>	Enter a name for the credentials certificate. Displays if the <b>Credential Source</b> is <b>Upload</b> .
<b>Certificate</b>	Select <b>Upload</b> , navigate to the desired credential certificate file and select <b>Save</b> . Displays if the <b>Credential Source</b> is <b>Upload</b> .
<b>Certificate Authority</b>	Use the drop-down menu to select a predefined certificate authority. Displays if the <b>Credential Source</b> is <b>Define Certificate Authority</b> .
<b>Certificate Template</b>	Use the drop-down menu to select a predefined certificate template specific to the selected certificate authority. Displays if the <b>Credential Source</b> is <b>Define Certificate Authority</b> .
<b>Store Location</b>	Use the drop-down menu to choose to save the certificate on the specific user account level or on the Computer Store for all users of a computer.
<b>Certificate Store</b>	Select the certificate store folder location from the drop-down list. <ul style="list-style-type: none"> <li>• Trusted Root Certification Authorities</li> <li>• Trusted Publishers</li> <li>• Untrusted Certificates</li> <li>• Trusted People</li> </ul>

6. Select **Save & Publish** to push the profile to devices.

## Launcher Profile (Windows Rugged)

The AirWatch App Launcher restricts user access to a list of allowed applications and native features on the device. Use the App Launcher to control the apps available to end users and the layout of the device home screen.

The Launcher profile enables you to customize the look and layout of the Windows Rugged device home screen. You can configure the launcher profile to start when the device starts to limit end-user access to the entire device. To limit end-user access to the correct apps on a shared device, you can set the launcher profile to display based on the user group of the end user. This functionality allows you to tailor the launcher to the role of the end user using a shared device.

Customize the launcher to display different settings and apps based on the layout you want. To manage the device, the launcher profile includes different tools for admins to troubleshoot the device.

## Create a Launcher Profile (Windows Rugged)

Configure the AirWatch App Launcher profile to customize the layout and apps of a Windows Rugged device using the AirWatch App Launcher. This customization allows you to control end-user access to the device settings and applications based on the roles of the user.

To configure a Launcher profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.  
These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).
4. Select the **Launcher** profile.
5. Enter a **Title** for the launcher profile. You can use the supported AirWatch Lookup Values. Select (i) for a list of all AirWatch supported Lookup Values.
6. Define an **Administrative Passcode** for setting configurations on the device.
7. Define the **User Category** of the end user if Shared Devices are enabled in the Windows Rugged Agent Settings page. The user category ties end users to specific Launcher profiles allowing you to tailor Launcher layout and configuration to individual end users. Consider creating user groups based on the end user's role.
8. Configure the remaining options:

Settings	Descriptions
<b>Allowed Applications</b>	
<b>Application Name</b>	Specifies the application name that displays in the AirWatch App Launcher.
<b>File Path to Exe</b>	Defines the file path of the application and includes the executable file.
<b>Arguments (Optional)</b>	Enter any command-line arguments to run the application.
<b>Hide</b>	Masks the application on the device.
<b>Start Up Options</b>	Select the condition that triggers the launcher starting.
<b>Delayed Launch</b>	Select the time (in seconds) that the launcher is delayed from starting following device boot. This setting requires <b>Start Up Options</b> to be set to <b>Delayed Start</b> .
<b>Console Application</b>	Defines the application as not having a user interface or as a background process.
<b>Tools Menu</b>	Lists applications on the Tools menu for the App Launcher.
<b>Background Application</b>	Select if the application requires no user interaction and you want it to run in the background.

Settings	Descriptions
<b>Disable App Close</b>	Removes the close button from the application preventing the user from closing the app. Select this option only for dedicated use applications.
<b>Enable Home Button</b>	Allows you to minimize a whitelisted application and return to the main App Launcher page while keeping the current session active for that app.  If you want to return to the minimized app, select the icon on the App Launcher screen.
<b>Application Icon Path</b>	Defines the path to the location of the application icon that resides on the device. If the desired icon does not reside on the device, then you can upload an image.
<b>Upload Icon</b>	Allows you to upload an image (icon) that can be associated to an application by entering the path in the Application Icon Path text box.
Settings	
<b>View Time</b>	Displays the time for application processes.
<b>Disable Active Sync</b>	Disables the use of the Exchange ActiveSync protocol for application transactions.
<b>Disable Keyboard</b>	Disables the use of the device keyboard to perform application processes.
<b>View IP Address</b>	Displays the device's IP address within application processes.
<b>Enable Native Taskbar*</b>	Uses the default taskbar for that device instead of the custom launcher taskbar.
<b>View Connection Status</b>	Displays the connection status of the device.
<b>Show Message Notification</b>	Displays a message indicator for unviewed messages from a third-party application.
<b>Display Organization Group</b>	Displays the Organization Group of the signed-in user.
<b>View Wi-Fi Signal</b>	Displays the strength of the Wi-Fi signal.
<b>View Cell Signal</b>	Displays the strength of the cell signal.
<b>View Battery Icon</b>	Displays the amount of power remaining in the battery.
<b>View Volume</b>	Displays the level the volume is set to on the device.
<b>Display Missed Call Notification</b>	Displays a notification when an incoming call was not answered/missed.
<b>Display SMS/Text Notification</b>	Displays a notification when the device received a text message.

Settings	Descriptions
<p>*When selected, these settings are disabled except for <b>View Time</b>, <b>Disable Active Sync</b>, <b>Disable Keyboard</b>, and <b>View IP Address</b>. These exceptions exist because the native taskbar <i>only</i> displays the icons/settings that are available to that device.</p>	
Tools	
<p>These settings allow the user to customize and manage the contents of the Tools Menu on the Launcher. You can select any combination of the following options to make those options available to the user on the Tools Menu. A second option is to whitelist the application under the <b>Allowed Application</b> section by selecting the <b>Tools Menu</b> option next to that application. A third option is to configure apps directly on a device, provided the <b>configure</b> option is enabled.</p>	
<p><b>Restart AW Agent</b></p>	<p>Allows the user to restart the AirWatch Service on the device.</p>
<p><b>Restart AWCM</b></p>	<p>Allows the user to restart the AWCM Service on the device.</p>
<p><b>Start AW Diagnostics</b></p>	<p>Allows the user to open and access the AirWatch Diagnostics utility.</p>
<p><b>Start App Manager</b></p>	<p>Allows the user to open and access the Application Manager utility.</p> <p>The Launcher is capable of <b>multiple profile support</b>. Profiles that are active and meet the assignment criteria for that device.</p> <p>Multiple profile support requires AirWatch Agent version 4.0.0.13 or higher.</p>
<p><b>Configure</b></p>	<p>Allows the user to configure all areas of the Launcher directly on the device, including <b>Allowed Applications</b>, <b>Settings</b>, and <b>Tools Menu</b>.</p>
View/Layout	
<p><b>Select Launcher View/Layout Style</b></p>	<p>Select the format for the view/layout.</p> <ul style="list-style-type: none"> <li>• <b>Grid</b> – Traditional grid layout of applications.</li> <li>• <b>List</b> – List of applications with a small thumbnail of the app icon.</li> <li>• <b>Plain List</b> – List of applications with no thumbnail of app icon.</li> <li>• <b>None</b> – No preset view/layout. End users can select the view/layout they want. If you select a view/layout other than <b>None</b>, end users cannot change the view/layout.</li> </ul>

Settings	Descriptions
<b>Wallpaper</b>	
<b>Enable Wallpaper</b>	Enable to set a wallpaper for the Launcher. You must select a <b>Landscape</b> and <b>Portrait</b> mode image.

9. Select **Save & Publish**.

**Important:** Wallpapers cannot exceed 640x480 or be more than 20 KB. Images larger than 20 KB cannot display.

## Update the Launcher Profile from the Windows Rugged Device

You may need to change the applications included in the AirWatch App Launcher. This action requires admin credentials to perform.

To make Admin configurations in the AirWatch App Launcher:

1. Open the AirWatch App Launcher application on the device.
2. Enter the Admin passcode in the **Password** text box and select **Accept**.
3. Select the option to **Import**, **Export**, or **Add** applications from and to the list.
4. Select **Add** to add an application and complete the following options on the **Add Application** screen:
  - **Application Location** – Defines the file path of the application or select the **Browse** option.
  - **Application Name** – Defines the name of the application to display in the AirWatch App Launcher.
  - **Arguments** – Defines command-line arguments to run the application.
  - **Launch On Start** – Starts the application when the AirWatch App Launcher is started.
  - **Hide from User** – Masks the application in the user interface.
  - **Console Application** – Defines the application as not having a user interface or as a background process.
5. Select **Save**.



## Configure Shared Device Launcher Profiles (Windows Rugged)

AirWatch allows you to configure Launcher profiles to support multiple end users sharing a single device. Use this feature to customize the Launcher for individual users and their different applications to meet their individual roles.

**Important:** You must enroll the device into the Parent organization group for the Launcher profiles for various User Categories to push to the device.

To configure the Launcher profile for shared devices:

1. Navigate to **Groups & Settings > All Settings > Devices & Users > Windows > Windows Rugged > Agent Settings**.
2. Select **Enable Shared Device Mode**.
3. Navigate to **Accounts > Users > User Settings > Categories > Add** and enter the Name and Description. Consider creating the User Categories based on the various roles end users have that require different applications on the device. For example, basic users require different applications than a shift supervisor or manager. To accommodate this requirement, create different User Categories for the basic user, shift supervisor, and manager.
4. Navigate to **Accounts > Users > List View** and **Add** new user or **Edit** an existing one.
5. Enable **Show Advanced User Details** and select the applicable **Category** based on the role of the user.
6. Create and configure a Launcher Profile. Select the applicable **User Category** based on the role of the user for this specific Launcher profile.

- Configured more Launcher profiles for each end-user role. For more information, see [Create a Launcher Profile \(Windows Rugged\) on page 28](#)

End users must enter their credentials and their group ID. To remove the need to enter the group ID, navigate to **Settings > All Settings > Devices & Users > General > Shared Device** and set the **Group Assignment Mode** to **Fixed Organization Group**.

## Create a VPN Profile (Windows Rugged)

Create a VPN Profile to deploy corporate VPN settings directly to managed devices. This profile enables end users to access corporate infrastructure remotely and securely.

**Important:** You can use a VPN profile only on Windows Rugged devices, but not on Windows CE devices.

To enforce a VPN profile:

- Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
- Select **Windows Rugged**.
- Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

- Select the **VPN** profile.
- Configure the VPN settings:

Settings	Descriptions
<b>Connection Type</b>	<p>Defines the connection for the VPN.</p> <p>Both of these types rely on the encryption protocol to be passed within the tunnel because they do not inherently have their own encryption methods.</p> <ul style="list-style-type: none"> <li><b>PPTP</b> – Point-to-Point Tunneling Protocol.</li> <li><b>IPSec/L2TP</b> – Layer 2 Tunneling Protocol.</li> </ul>
<b>Connection Name</b>	Enter the connection name.
<b>Server</b>	Enter the hostname of IP address of the VPN server.
<b>Username</b>	<p>Enter the user name for the VPN.</p> <p>You can use lookup values to use the device-specific value.</p>
<b>Domain</b>	<p>Enter the domain for the VPN.</p> <p>You can use lookup values to use the device-specific value.</p>

Settings	Descriptions
<b>Authentication</b>	<p>Defines the authentication for the VPN.</p> <ul style="list-style-type: none"> <li>• <b>Certificate</b> – Use this option to deploy certificate-based authentication for your VPN connections. You must choose this option if you select the <b>Connection Type IPSec/L2TP</b></li> <li>• <b>Pre Shared Key</b> – Use the PSK option when you have a shared secret that device users use to access the VPN. This authentication type often uses symmetric key algorithms for security.</li> </ul>
<b>Shared Secret</b>	<p>Enter the shared secret for the connection.</p> <p>Displays when <b>Authentication</b> is set to <b>Pre Shared Key</b>.</p>

6. Select **Save & Publish** to push the profile to devices.

## Create a Time Sync Profile (Windows Rugged)

Deploy Time Sync payloads to synchronize the system time on Windows Rugged devices with time servers to ensure that the device fleet runs on the same clock. This profile is useful for global networks with devices in numerous time zones.

To configure a Time Sync profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.  
These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).
4. Select the **Time Sync** profile.

## 5. Configure the Time Sync settings:

Settings	Descriptions
<b>Time Sync Method</b>	Select the preferred method of time sync. <ul style="list-style-type: none"> <li>• <b>Time Server</b> – Select to use a Network Time Protocol server with which to sync devices such as pool.ntp.org.</li> <li>• <b>HTTP</b> – Select to enter a URL. This URL can be any URL. For example, you can use www.google.com.</li> <li>• <b>SNTP</b> – Select to enter a Simple Network Time Protocol such as time.nist.gov.</li> <li>• <b>Console</b> – Select to sync the device with the AirWatch Console.</li> </ul>
<b>Primary Time Server</b>	Enter the URL of the time server with which the device syncs.
<b>Port</b>	Enter the port the device uses to sync with the secondary server.
<b>Secondary Server</b>	Enter an optional secondary server the device can use if the primary is unavailable. Displays when <b>Time Server</b> is selected as the <b>Time Sync Method</b> .
<b>Port</b>	Enter the port the device uses to sync. Displays when <b>Time Server</b> is selected as the <b>Time Sync Method</b> .
<b>Sync Time Every</b>	Enter the number of minutes, hours, or days.

6. Select **Save & Publish**.

## Create a Shortcut Profile (Windows Rugged)

Create a Shortcut profile to push custom icons associated with URLs. These icons provide your end users with the shortcuts to Web sites they need.

You can add as many icons as needed to a shortcut payload. Upload the icon image file into the AirWatch Console.

To configure a shortcut profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Shortcuts** profile.
5. Configure the Shortcuts settings:

Settings	Descriptions
<b>Label</b>	Enter the name associated to the icon that displays on the user's device.
<b>URL</b>	Enter the URL for the Web site in which the user is advanced to when user taps on the icon.
<b>Icon</b>	Upload the image file that displays on the user's device that is associated to the URL.

6. Select **Save & Publish** to push the profile to devices.

## Create a Time Zone Profile (Windows Rugged)

Create a Time Zone profile to configure your Windows Rugged device time zone settings. This profile eliminates having to remote control into the end user's device to set the time zone manually.

After pushing the profile, the device displays the time zone, and all device activity is time stamped based on that time zone regardless of the actual device location.

To configure Time Zone profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.  
These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).
4. Select the **Time Zone** payload, select the **Time Zone Setup** drop-down, and select **Set Time Zone Manually**.
5. Select the **Time Zone** drop-down and select the appropriate time zone from the list.

## Create a Custom Attribute Payload

AirWatch allows you to create and deploy custom attributes that collect and compare custom-made values from device. Custom attributes are used to manage devices using attributes assigned to or gathered from the devices.

These attributes can be collected or created by third-party applications for use with the AirWatch Console. By using custom attributes, you can ensure that only the devices whose attribute values match the ones you set are selected.

Custom attributes are used by the rules generator of product provisioning to provision products to specific devices. Ensure your devices are provided the correct values to prevent incorrect products from being provisioned to them. See [Custom Attributes Overview on page 51](#) for more information.

To configure a Custom Attributes payload, take the following steps.

1. Navigate to **Devices > Products > Profiles > List View** and select **Add** and then select the device platform.
2. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

3. Select the **Custom Attribute** profile.
4. Select **Add** to configure the custom attribute(s) you want to use.

Settings	Descriptions
<b>Application</b>	Select the application (grouping of custom attributes) that contain the attribute(s) you want to configure.
<b>Custom Attributes</b>	Select the specific custom attribute(s) for the profile to configure.
<b>Value</b>	Enter the custom attribute value to assign to the device.
<b>Is Dynamic</b>	Enable to allow the custom attribute's value to change and be changed based on permissions. If checked, this will look up the custom attribute value for an individual device when the command is queued instead of using the default value specified in the payload. If no value is found, the device's default value is used.
<b>Permission</b>	Set the permission of the custom attribute. <ul style="list-style-type: none"> <li>• <b>Read/Write</b> allows the applications to change the attribute value.</li> <li>• <b>Read Only</b> restricts applications from changing the value.</li> </ul>
<b>Sync</b>	Enable to push the attribute value back to the AirWatch Console to be displayed in the Device Details page.

You may add additional attributes as necessary.

5. Select **Save & Publish** to push the profile to devices.

## Create a Proxy Profile (Windows Rugged)

Create a proxy profile to set specific proxy settings for devices. Use a proxy to add a layer of security to your Windows Rugged devices.

To configure a Proxy profile:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **Proxy** profile.

5. Configure the profile settings:

Settings	Descriptions
<b>Proxy Type</b>	Select <b>Manual</b> to configure the specific settings or <b>Auto</b> to use the settings of a Proxy URL.
<b>Proxy Server</b>	Enter the proxy server URL.
<b>Proxy Server Port</b>	Enter the port used to communicate with the proxy server.
<b>Proxy Username</b>	Enter the user name credential for the proxy server.
<b>Proxy Password</b>	Enter the password credential for the proxy server.
<b>Proxy URL</b>	Enter the URL for the auto proxy settings.

6. Select **Save & Publish** to push the profile to devices.

## Create a GPRS Profile (Windows Rugged)

The General Packet Radio Service (GPRS) allows mobile data on 2G and 3G cellular communication system for GSM devices. The GPRS payload allows you to configure and control how the device uses GPRS.

To configure a GPRS payload:

1. Navigate to **Devices > Profiles > List View > Add** and select **Add Profile**.
2. Select **Windows Rugged**.
3. Configure the profile's **General** settings.

These settings determine how the profile is deployed and who receives it. For more information on General settings, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

4. Select the **GPRS** profile.

## 5. Configure the GPRS settings:

Settings	Descriptions
<b>General</b>	
<b>Enabled</b>	Select to enable GPRS management.
<b>Connection Name</b>	Enter the GPRS connection name.
<b>Destination</b>	Select whether the GPRS connection is to the <b>Internet</b> or a <b>Work</b> intranet.
<b>GPRS Info Access Point Name</b>	Enter the APN the device must connect to. The APN must follow the correct format: <network identifier>.mnc<MNC>.mcc<MCC>.gprs
<b>Username</b>	Enter the user name for connecting to the network.
<b>Password</b>	Enter the password for connecting to the network.
<b>Domain</b>	Enter the network domain.
<b>Advanced</b>	
<b>Advanced</b>	Enable to configure advanced options.
<b>Specific Name Servers</b>	Enable to enter specific name servers to use.
<b>Country Code</b>	Enter the network country code.
<b>Area Code</b>	Enter the device area code.
<b>Use Country and Area Codes</b>	Enable to use Country and Area codes.
<b>Phone</b>	Enter the device phone number.
<b>Device Name</b>	Enter the device name for use in phone books.
<b>Device Type</b>	Select the RAS device type.
<b>Use Software Compression</b>	Allows for faster connection speeds on low-bandwidth networks by compressing the phone book entries.
<b>Use IP Header Compression</b>	Allows for faster connection speeds on low-bandwidth networks by compressing the IP Header.
<b>Specific IP Address</b>	Enable to connect to a specific IP Address.
<b>Read Only</b>	Enable to restrict the device to reading data only.
<b>Authentication Type</b>	Select the type of authentication the network uses.

6. Select **Save & Publish**.

# Chapter 5: Compliance Policies

Compliance Policy Overview ..... 42

## Compliance Policy Overview

The compliance engine is an automated tool by AirWatch that ensures all devices abide by your policies. These policies may include basic security settings such as requiring a passcode and having a minimum device lock period. For certain platforms, you may also decide to set and enforce certain precautions. These precautions include setting password strength, blacklisting certain apps, and requiring device check-in intervals to ensure that devices are safe and in-contact with AirWatch.

Once devices are determined to be out of compliance, the compliance engine warns users to address compliance errors to prevent disciplinary action on the device. For example, the compliance engine can trigger a message to notify the user that their device is out of compliance.

In addition, devices not in compliance cannot have device profiles assigned to it and cannot have apps installed on the device. If corrections are not made in the amount of time specified, the device loses access to certain content and functions that you define. The available compliance policies and actions vary by platform.

For more information about compliance policies, including which policies and actions are supported for a particular platform, refer to the **VMware AirWatch Mobile Device Management Guide**, available on [AirWatch Resources](#).

# Chapter 6:

## AirWatch Agent for Windows Rugged

Configure the AirWatch Agent for Windows Rugged .....	44
Windows Rugged Device Logging with the AirWatch Agent v5.X+ .....	47

## Configure the AirWatch Agent for Windows Rugged

The AirWatch Agent for Windows Rugged devices is pre-configured with AirWatch. Change these settings when you need the AirWatch Agent to meet certain business needs.

Navigate to **Groups & Settings > All Settings > Devices & Users > Windows > Windows Rugged > Agent Settings**.

### Upgrade the Agent

When a new version of the AirWatch Agent releases, upgrade your devices remotely and easily. With product provisioning, devices receive the AirWatch Agent CAB file and install it based on directions. For more information, see the Product Provisioning Guide for Windows Rugged available on AirWatch Resources.

 If you are using a legacy AirWatch Agent older than version 5.2.x, you must use the legacy Over-the-Air Migration method. For more information, see <https://support.air-watch.com/articles/115001664548>.

### Device-side Scripting

The AirWatch AWScript component allows you to configure your Windows Rugged devices through device-side scripting. The script file uses a dialect of BASIC as its core scripting language and adds AirWatch specific extensions on top.

 For more information on the AWscript and its capabilities, see <https://support.air-watch.com/articles/115001664528>

### General

Setting	Description
<b>Device ID Algorithm</b>	Set the unique device identification algorithm used on the device.
<b>Heartbeat Interval (min)</b>	Set the time (in minutes) the agent waits before checking in with the AirWatch Console.
<b>Data Sample Interval (min)</b>	Set the time (in minutes) the agent waits to collect data from the device.
<b>Data Transmit Time Interval (min)</b>	Set the time (in minutes) the agent waits to send data collected from the device to the AirWatch Console.
<b>Check-In on Condition (Event)</b>	Enable to limit the agent to check-in or beacon to the AirWatch Console only when certain conditions (Wi-Fi connection, AC Power, or NW Adapter) are met. This helps reduce bandwidth issues as devices typically meet the condition when they are stored for after hours.

## Shared Devices

Setting	Description
<b>Enable Shared Device Mode</b>	Select this check box to enable shared device functionality. For more information, see the Windows Rugged Launcher Profile Overview <b>VMware AirWatch Windows Rugged Platform Guide</b> , available on <a href="#">AirWatch Resources</a> .

## Notifications

Setting	Description
<b>Enable Agent Installation Complete Notification</b>	Select this check box to enable or disable notifications for Agent installation completion.
<b>Enable Product Install Status Notification</b>	Select this check box to enable or disable notifications through the Agent for product installation completion.

## Location

Setting	Description
<b>Collect Location Data</b>	Enable to allow the agent to determine the device location based on a device's Wi-Fi network. When available, the agent will report the location to the AirWatch Console using the Data Transmit Interval.

## Application List

Setting	Description
<b>Applications Poll Interval (min)</b>	Set the time interval (in minutes) at which the applications list for each device will refresh on the AirWatch Console.

## Certificate List

Setting	Description
<b>Certificate Poll Interval (min)</b>	Set the time interval at which the certificate list for each device will refresh on the AirWatch Console.

## Proxy

Setting	Description
<b>Proxy Configuration</b>	Enable to allow the configuration of a proxy settings.

## Application Manager Package Scheduler

These settings are for the legacy AirWatch Agent v3.3.

Use the **APPLICATION MANAGER PACKAGE SCHEDULER** to define a schedule for devices with the AirWatch Agent v3.3+ to retrieve products provisioned on schedule.

Setting	Description
<b>Add</b>	Select to create schedules for provisioning products using Products (Legacy).
<b>Application Manager Scheduler</b>	Select the hour the product begins to push to devices.
<b>Randomization Window (min)</b>	Select the amount of time the product is pushed over. The order of devices is randomized.

## Sideload Cab

Setting	Description
<b>Request Enrollment Cab</b>	Enable to create a side loading cab to quickly enroll devices.
<b>Platform</b>	Select the operating system for the cab file.
<b>Enrollment User</b>	Select a user for the cab file to use during enrollment. The cab file can be used on multiple devices regardless of the user selected.
<b>Enrollment User Password</b>	Enter the password for the user for enrolling with the cab file.
<b>Show Characters</b>	Select to show password characters.

## Power On Password

Use the **Power On Password** option to control system BIOS password options to secure the device from unauthorized users when they turn on the device.

**Important:** Power On Password is *only* for Athena and requires the Power On Password CAB, which is a separate CAB component. You can perform a similar function through the AirWatch Agent by pushing down a "Passcode" profile.

To configure the Power On Password option:

1. Navigate to **Groups & Settings > All Settings > Devices & Users > Windows > Windows Rugged**.
2. Enable **Power On Password** and set the options, including:
  - **Path to App Update** – Enter the path to the AppUpdate.exe file so that this loader can check for updates, install the updates and load and run the applications it updates.
  - **Intermec Reboot Exe** – Enter the path to the Reboot.exe file on Intermec devices used to warm boot the device.
3. Select **Save**.

## Advanced Settings

Use these options to update applications on Windows Rugged devices and to reset devices.

1. Navigate to **Groups & Settings > All Settings > Devices & Users > Windows > Windows Rugged**.
2. Select **Advanced** and set the options, including:
  - **Force Password Expiration** – Forces the password to expire so that the user must change the password.
  - **View Power On Password** – Enables the user to see the password they enter.
3. Select **Save**.

## Windows Rugged Device Logging with the AirWatch Agent v5.X+

All device log settings are configured through the `log_config.cfg` file located in the "`\Program Files\AirWatch`" directory. When this file is opened up and viewed in Notepad, it appears with the following text and options:

```
[*]
trace_level=5
max_file_size_kb=256
files_to_keep=2
log_file_path=\Program Files\AirWatch\Logs
use_local_time=false

[aw_setup]
trace_level=5
max_file_size_kb=256
files_to_keep=2
log_file_path=\
use_local_time=false

[awregisterdevice.exe]
trace_level=3
max_file_size_kb=256
files_to_keep=2
log_file_path=\Program Files\AirWatch\Logs
use_local_time=false

[awapplyprofile.exe]
trace_level=5
max_file_size_kb=256
files_to_keep=2
log_file_path=\Program Files\AirWatch\Logs
use_local_time=false

[awremotecontrol.exe]
trace_level=1
max_file_size_kb=256
files_to_keep=2
log_file_path=\Program Files\AirWatch\Logs
```

```
use_local_time=false
```

The first setting group that appears under the asterisk is the default configuration settings for all logs available on the device.

Trace levels vary from 1 to 5. A level of 1 provides the most basic and least amount of information. Developers use Level 5 for debugging purposes since it provides all available messaging. There is a tradeoff between the trace level and the log size. A higher trace level increases the size of the log files due to messaging increase. The trace level that is set in the default section applies to all log files on a device.

You can keep the default log level low and still increase the log level for the four options below the default log level. Specify the log level for each of the options if you choose to use a different trace level than the default level.

The logs available on a device vary based on what is configured and the OEM of the device. The following log files are generally available on Windows Rugged devices:

- `aw_setup` – Provides logging information relating to the AWMasterSetup utility. The AWMasterSetup utility initiates the agent install and uninstall process on a device. This log file is the only log file that is not located in the "`\Program Files\AirWatch`" directory. The log is instead located in the root of the file system.
- `awacmclient` – Provides logging information relating to the AWCM client on the device.
- `awapplicationmanager` – Provides logging information relating to product provisioning.
- `awprocesscommands` – Provides logging information relating to the execution of MDM commands and installation of profiles.
- `AWService` – Provides information about the AWService.exe component, which is responsible for managing beacon and interrogator samples.
- `awapplyprofile` – Relates to installation of the agent settings XML file which occurs during the enrollment process.
- `awregisterdevice` – Provides information about the registering of the device that occurs during the enrollment process.
- `awapplauncher` – Provides information about the Application Launcher executable. This log only applies to devices using the App Launcher.
- `fusionwlansetup` – Provides information about configuring and setting up the Fusion Wi-Fi driver on Motorola devices.

## General Process for Configuring Log Files

1. Transfer the log file to your PC using the file manager utility in device details or through remote management.
2. Open the log file using a basic text editor such as Notepad.
3. Edit the desired trace level to the needed value.
4. Save the log file.
5. Transfer the log file back to the "`Program Files\AirWatch`" directory on the devices. Consider first deleting the old `log_config.cfg` file on the device.

6. Restart the AWService on the device once it has the updated log\_config.cfg file. Use the **Restart AirWatch Agent** or the **Warm Boot** device actions available in the AirWatch Console.
7. Once the AWService restarts, the new logging configuration takes effect.

# Chapter 7:

## Custom Attributes

Custom Attributes Overview .....	51
Create Custom Attributes .....	51
Custom Attributes Importing .....	52
Windows Rugged Custom Attributes .....	53
Create an XML Provisioning File .....	55

## Custom Attributes Overview

Custom attributes enable administrators to extract specific values from a managed device and return it to the AirWatch Console. You can also assign the attribute value to devices for use in product provisioning or device lookup values.

These attributes allow you to take advantage of the rules generator when creating products using Product Provisioning.

**Note:** Custom attributes (and the rules generator) are only configurable and useable at Customer-level organization groups.

### Custom Attributes Database

Custom attributes are stored either as XML files on the device or in the custom attribute database on the AirWatch Console server. When using the database, custom attributes are sent as samples to AirWatch periodically for asset tracking of key/value pairs. If a record in the device database is configured with 'Create Attribute' = TRUE, then the Name and Value will automatically be retrieved by the AirWatch Agent and sent with the custom attributes sample. The key/value pair will show in the Device Details page for the device in the Custom Attributes tab.

### Create Custom Attributes

Create a custom attribute and values to push to devices. You create the attributes and values associated with them. For more information, see [Create Custom Attributes on page 51](#).

### Importing Custom Attributes

The custom attribute batch import feature allows you to load custom attributes and corresponding values into the system in bulk. In the templates provided, each column corresponds to one custom attribute and each row corresponds to different parameters of custom attribute. For more information, see [Custom Attributes Importing on page 52](#).

### Platform-Specific Custom Attributes Provisioning

You can push custom attributes to a device using XML provisioning for use with advanced product provisioning functionality. The method for pushing the XML varies based on the device platform.

## Create Custom Attributes

Create a custom attribute and values to push to devices. These attributes and values control how product rules work and function as lookup values for certain devices.

1. Navigate to **Devices > Staging & Provisioning > Custom Attributes > List View**.
2. Select **Add** and then select **Add Attribute**.
3. Under the **Settings** tab, enter an **Attribute Name**.
4. Enter the optional **Description** of what the attribute identifies.
5. Enter the name of the **Application** that will gather the attribute.

6. Select **Collect Value for Rule Generator** to make the values of the attribute available in the drop-down menu of the rule generator.
7. Select **Use in Rule Generator** if you want to use the attribute in the rule generator.
8. Select **Persist** to prevent the removal of the custom attribute from the AirWatch Console unless an Admin or an API call explicitly removes it. Otherwise, the attribute is removed as normal.  
If you delete a custom attribute that reported from a device to the AirWatch Console, a persisted custom attribute still remains in the AirWatch Console.  
Custom attribute persistence is only available to Android and Windows Rugged devices.
9. Select **Use as Lookup Value** to use the custom attribute as a lookup value anywhere in the AirWatch Console.  
For example, you could use custom attributes as part of a device friendly name to simplify device naming.
10. Select the **Values** tab.
11. Select **Add Value** to add values to the custom attribute and then select **Save**.

## Custom Attributes Importing

The custom attribute batch import feature allows you to load custom attributes and corresponding values into the system in bulk. In the templates provided, each column corresponds to one custom attribute and each row corresponds to different parameters of custom attribute.

With the templates, you can import custom attributes in different ways and with different information.

**Caution:** The syntax of the first column of each template must be replicated exactly. Failure to use proper syntax can cause database issues and result in loss of data.

### Template Types

- Custom Attributes Template – Allows you to define a custom attribute and its settings.

	A	B	C	D	E	F	G
1	CustomAttributeName	Description	ApplicationName	UsedInRuleGenerator	CollectValuesForRuleGenerator	Persist	ShowOnDevicesGrid
2	AgentVersion1	Airwatch Agent Description	Services1.exe	1		0	1
3	AgentVersion2	Airwatch Agent Description	Services1.exe	1		0	1
4	AgentVersion3	Airwatch Agent Description	Services1.exe	1		0	1
5	AgentVersion4	Airwatch Agent Description	Services1.exe	1		0	1

- Custom Attribute Values Template – Allows you to define the values of predefined custom attributes.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1	SSID Bangalore	SSID Palo Alto	PreSharedKey AdminOffc	Custom Attributes									
2	Enterprise	PLTO_1	ADMIN\$										
3	BNG_Test	PLTO_Guest	ADM1N	Values									
4	AWT		#Dm1N										
5													

- Device Custom Attribute Values – Allows you to define the values of predefined custom attributes for individual devices based on the cross reference (Xref) value. The Xref values determine the individual devices receiving the value

for each custom attribute.

	A	B	C	D	E	F	G	H	I
1	XRefType	XRefValue	SSID Cust1	USERNAME Cust2	PASSWORD Cust3	SSID CXXX	Services1.exe AgentVersion1		
2	1	5263	AW_BNG	DEV1	XXXXXXXXXX	SS	5.3.56.147		
3									
4									
5									

- 1 – DeviceID (AirWatch assigned DeviceID when the device enrolls)
- 2 – Serial Number
- 3 – UDID
- 4 – MAC Address
- 5 – IMEI Number

Save the file as a .csv before you import it.

## Windows Rugged Custom Attributes

Use XML provisioning to collect custom attributes based on device details. Custom attributes enable you to use advanced product provisioning functionality.

### Implementation

To begin collecting custom attributes, follow the steps detailed below:

1. Navigate to **Devices > Products > File/Actions > Add**, and then select **Windows Rugged** as your platform.
2. Create an XML product. For more information, see [Create an XML Provisioning File on page 55](#). The manifest should include an action to download the XML file to **\Program Files\Airwatch\Cache\Profiles**.

Upon receiving the XML file, the AirWatch Agent for Windows Rugged creates a custom attributes output file. During the next check-in with AirWatch, the agent sends the output file to the AirWatch Console.

Once the XML file installs, the custom attributes requested in the file are reported to the AirWatch Console. These values display in the AirWatch Console on the Device Details page under custom attributes. The Device Details page enables you to view the name of the attribute as well as the values returned from each device. These values can be used to create product assignment rules using the Custom Rules system.

Application	Attribute	Value
services.exe	HKLM_Ident_Username	guest
services.exe	HKLM_Ident_OrigName	Pocket_PC
services.exe	HKLM_Comm_BootCount	3
services.exe	Software_AirWatch_DeviceIdAlgorithm	3
services.exe	HKLM_SoftwareAW_SerialNo	13228521401413
services.exe	AWAggregator_Server	test.airwatchdev.com
services.exe	HKLM_SoftwareAW_RegisterDeviceRetryCount	20

You may also view existing custom attributes for all devices at a particular organization group as well as manually create custom attributes directly in the AirWatch Console. Navigate to **Devices > Staging & Provisioning > Custom Attributes > List View** to see these custom attributes listed. Any custom attribute created in this manner automatically associates with a device and its respective custom attribute value that is successfully transmitted to the AirWatch Console.

## Syncing Registry Settings

In order to synchronize the registry settings on a Windows Rugged device with the console, which is likely the most common use of custom attributes for Windows Rugged devices, you need to create a custom XML file. Below is an example of the format of an XML file that can pull information from the registry on a device:

```
<?xml version="1.0"?>
<wap-provisioningdoc allowRemoval="True" name="GetTypicalRegValues/V_1" id="5a63204f-848c-42d5-9c14-4ca070743920">
  <characteristic uuid="f49a9cb5-48e9-47cd-84cc-ef122dcb5d50"
    type="com.airwatch.getregistryinfo.winmo">
    <reg_value value_name="Username" key_name="HKEY_LOCAL_MACHINE\Ident" custom_
      attribute_name="HKLM_Ident_Username"/>
    <reg_value value_name="OrigName" key_name="HKEY_LOCAL_MACHINE\Ident" custom_
      attribute_name="HKLM_Ident_OrigName"/>
    <reg_value value_name="BootCount" key_name="HKEY_LOCAL_MACHINE\Comm" custom_
      attribute_name="HKLM_Comm_BootCount"/>
    <reg_value value_name="DeviceIdAlgorithm" key_name="HKEY_LOCAL_
      MACHINE\Software\AirWatch" custom_attribute_name="Software_AirWatch_DeviceIdAlgorithm"/>
  </characteristic>
</wap-provisioningdoc>
```

It must be in the previous format for the XML file to get correctly parsed and the registry settings to be outputted to a key value pair that can be exported back to the AirWatch Console. In this example, the registry key path is "HKEY\_LOCAL\_

MACHINE\Ident” for two of the values and within that key path it is reading the values of “Username” and “OrigName”. The ‘custom\_attribute\_name’ parameter is simply the name of the custom attribute that displays in the console and corresponds to the value read from the device.

## Using Third-Party Applications to Create Custom Attributes

If you want to create custom attributes using a third party application, you need that application to export an XML file with a key value pair to the **Program Files\AirWatch\Cache\CustomAttributes** directory on the device. Once an XML file with a key value pair is present in this directory it is parsed by the agent and included in the next interrogator sample. The XML key/value pair should be in the following format:

```
<?xml version="1.0"?>
<attributes>
  <attribute name="HKLM_Ident_Username" value="guest"/>
  <attribute name="HKLM_Ident_OrigName" value="Pocket_PC"/>
  <attribute name="HKLM_Comm_BootCount" value="1"/>
  <attribute name="Software_AirWatch_DeviceIdAlgorithm" value="3"/>
  <attribute name="HKLM_SoftwareAW_SerialNo" value="13233521403231"/>
</attributes>
```

‘Attribute name’ is the name of the attribute in the console while ‘value’ is the corresponding value that is associated with that attribute.

## Create an XML Provisioning File

XML provisioning allows you to download a custom-designed XML file to a device in a provisioning product. After the file is downloaded, it executes an install command to extract the settings from the XML file and install them on the device.

1. Navigate to **Devices > Staging & Provisioning > Components > Files/Actions** and select **Add Files/Actions**.
2. Select your platform.
3. Enter the required settings on the **General** tab, then select the **Files** tab and upload the desired XML file and enter the destination path on the device.
4. Select the **Manifest** tab and **Add an Install Action** for the XML file.
5. Select **Save**.
6. Navigate to **Devices > Staging & Provisioning > Products List View**, and select **Add Product**.
7. Select your platform.
8. Enter the **General** information.
9. Select the **Manifest** tab.

10. Select **Install Files/Actions** and choose the files and actions just created.
11. **Save** and **Activate** the product.

The product downloads to all assigned devices and the XML file should successfully install.

XML Provisioning is for Windows Mobile devices only and not Windows CE.

# Chapter 8:

## Managing Windows Rugged Devices

- Windows Rugged Device Management Overview .....58
- Device Dashboard .....58
- Device List View ..... 58
- Windows Rugged Device Details Page .....59
- Remote Management ..... 60

## Windows Rugged Device Management Overview

After your devices are enrolled and configured, manage the devices using the AirWatch Console. The management tools and functions enable you to keep an eye on your devices and remotely perform administrative functions.

You can manage all your devices from the VMware AirWatch Dashboard. The Dashboard is a searchable, customizable view that you can use to filter and find specific devices. This feature makes it easier to perform administrative functions on a particular set of devices. The Device List View displays all the devices currently enrolled in your AirWatch environment and their status. The Device Details page provides device-specific information such as profiles, apps, AirWatch Agent version and which version of any applicable OEM service currently installed on the device. You can also perform remote actions on the device from the Device Details page that are platform-specific.

### Device Dashboard

As devices are enrolled, you can manage them from the AirWatch **Device Dashboard**. The **Device Dashboard** provides a high-level view of your entire fleet and allows you to act on individual devices quickly.

You can view graphical representations of relevant device information for your fleet, such as device ownership type, compliance statistics, and platform and OS breakdowns. You can access each set of devices in the presented categories by selecting any of the available data views from the **Device Dashboard**.

From the **List View**, you can take administrative action: send messages, lock devices, delete devices, and change groups associated with the device.

### Device List View

Select **Devices > List View** to see a full listing of all devices.

The **Last Seen** column displays an indicator showing the number of minutes elapsed since the device has checked-in.

Select a device in the **General Info** column at any time to open the details page for that device.

Sort by columns and configure information filters to review device activity based on specific information. For example, sort by the **Compliance Status** column to view only devices that are currently out-of-compliance and target only those devices. Search all devices for a friendly name or user name to isolate one device or user.

### Customize Device List View Layout

Display the full listing of visible columns in the **Device List** view by selecting the **Layout** button and choose the **Custom** option. This view enables you to display or hide Device List columns per your preferences.

There is also an option to apply your customized column view to all administrators. For instance, you can hide 'Asset Number' from the **Device List**.

Once all your customizations are complete, select the **Accept** button to save your column preferences and apply this new column view. You may return to the **Layout** button settings at any time to tweak your column display preferences.

### Search in Device List View

You can search for a single device for quick access to its information and take remote action on the device.

To run a search, navigate to **Devices > List View**, select the **Search List** bar and enter a user name, device friendly name, or other device-identifying element. This action initiates a search across all devices, using your search parameter.

## Windows Rugged Device Details Page

Use the Device Details page to track detailed device information and quickly access user and device management actions. You can access Device Details by selecting a device Friendly Name from the Device List View, using one of the Dashboards, or with any of the search tools.

From the Device Details page, you can access specific device information broken into different menu tabs. Each menu tab contains related device information depending on your AirWatch deployment.

### Remote Actions

The **More drop-down** on the Device Details page enables you to perform remote actions over the air to the selected device.

The actions vary depending on factors such as the device platform, AirWatch Console settings, and enrollment status:

- **Add Tag** – Assign a customizable Tag to a device, which can be used to identify a special device in your fleet.
- **AirWatch Agent (Query)** – Send a query command to the device's AirWatch Agent to ensure it has been installed and is functioning normally.
- **App Remote View** – Take a series of screenshots of an installed application and send them to the Remote View screen in the Admin Console. You may choose the number of screenshots and the length of the gap, in seconds, between the screenshots.
- **Apps (Query)** – Send a query command to the device to return a list of installed apps.
- **Certificates (Query)** – Send a query command to the device to return a list of installed certificates.
- **Change Organization Group** – Change the device's home organization group to another pre-existing OG. Includes an option to select a static or dynamic OG.
- **Clear Passcode (Device)** – Clear the device passcode. To be used in situations where the user has forgotten their device's passcode.
- **Delete Device** – Delete and unenroll a device from the Admin Console. This action does not remove any data from the device itself, only its representation in the console.
- **Device Information (Query)** – Send a query command to the device to return basic information on the device such as friendly name, platform, model, organization group, operating system version and ownership status.
- **Device Wipe** – Wipe a device clear of all data, including email, profiles and MDM capabilities and the device returns to a factory default state. This includes all personal user information if applicable. This action cannot be undone.
- **Edit Device** – Edit device information such as **Friendly Name**, **Asset Number**, **Device Ownership**, **Device Group** and **Device Category**.
- **Enterprise Reset** – Enterprise Reset a device to factory settings, keeping only the VMware AirWatch enrollment.
- **Enterprise Wipe** – Enterprise Wipe a device to unenroll and remove all managed enterprise resources including applications and profiles. This action cannot be undone and re-enrollment will be required for VMware AirWatch to manage this device again. Includes options to prevent future re-enrollment and a **Note Description** field for you to add any noteworthy details about the action.
  - Enterprise Wipe is not supported for cloud domain-joined devices.

- **File Manager** – Launch a File Manager within the AirWatch Console that enables you to remotely view a device's content, add folders, conduct searches and upload files.
- **Provision Now** – Provision products to a device. Provisioning is the ability to create an ordered installation of files, actions, profiles and applications into a single product that can be pushed to devices.
- **Query All** – Send a query command to the device to return a list of installed apps (including VMware AirWatch Agent, where applicable), books, certificates, device information, profiles and security measures.
- **Registry Manager** – Launch a Registry Manager within the AirWatch Console that enables you to remotely view a device's OS registry, add keys, conduct searches and add properties.
- **Remote Control** – Take control of a supported device remotely using this action, which launches a console application that enables you to perform support and troubleshooting on the device.
- **Remote Management** – Take control of a supported device remotely using this action, which launches a console application that enables you to perform support and troubleshoot on the device.
- **Request Device Check-In** – Request that the selected device check itself in to the AirWatch Console. This action updates the **Last Seen** column status.
- **Restart AirWatch Agent** – Restart the VMware AirWatch Agent. To be used during troubleshooting for when the enrollment process or submodule installation process is interrupted.
- **Send Message** – Send a message to the user of the selected device. Choose between **Email**, **Push Notification** and **SMS**.
- **Start/Stop AWCM** – Start/Stop the AirWatch Cloud Messaging service for the selected device. VMware AirWatch Cloud Messaging (AWCM) streamlines the delivery of messages and commands from the Admin Console by eliminating the need for end users to access the public Internet or utilize consumer accounts, such as Google IDs.
- **Task Manager** – Launch a Task Manager within the AirWatch Console that enables you to remotely view a device's currently-running tasks, including task **Name**, **Process ID** and applicable **Actions** you may take.
- **View Manifest** – View the device's **Package Manifest** in XML format from the AirWatch Console. The manifest on Windows Rugged devices lists metadata for widgets and apps.
- **Warm Boot** – Initiate a restart of the operating system without performing a power-on self-test (POST).

## Remote Management

The Remote Management Service allows you to remotely connect to end-user devices so you can assist in troubleshooting and maintenance. The Remote Management Service requires your computer and the end user device to connect to the Remote Management Server to facilitate communication between the AirWatch Console and the end user device.

For more information on installing, configuring, and using the Remote Management Service, please see the **VMware AirWatch Remote Management Guide**, available on [AirWatch Resources](#).

# Accessing Other Documents

While reading this documentation you may encounter references to documents that are not included here.

The quickest and easiest way to find a particular document is to navigate to [https://my.air-watch.com/help/9.2/en/Content/Release\\_Notes/Doc\\_List\\_PDFs.htm](https://my.air-watch.com/help/9.2/en/Content/Release_Notes/Doc_List_PDFs.htm) and search for the document you need. Each release-specific document has a link to its PDF copy on AirWatch Resources.

Alternatively, you can navigate to AirWatch Resources on myAirWatch ([resources.air-watch.com](https://resources.air-watch.com)) and search. When searching for documentation on Resources, be sure to select your AirWatch version. You can use the filters to sort by PDF file type and AirWatch v9.3.